
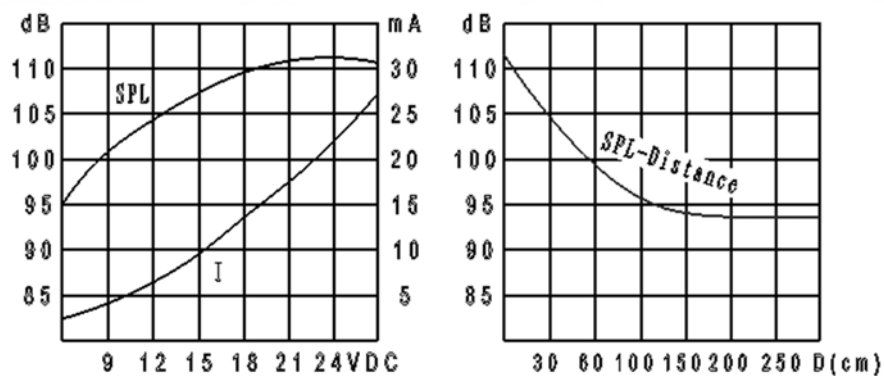


MODEL NO.:B4333  
Dimensions(mm):43x33  
Operating Voltage(VDC): 3~20  
Resonant Freq.(Hz):2900  
SPL(dB):100min at 10cm  
Tone: continuous/pulse

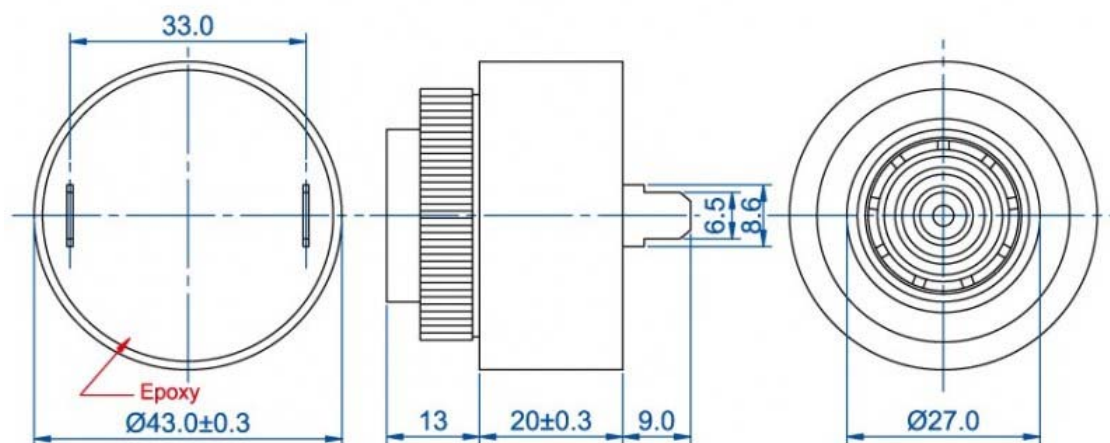

| Model | Model                      | B4333SP-TA-12-2.9-7.5-R |
|-------|----------------------------|-------------------------|
| 2     | Rated Voltage (VDC)        | 12                      |
| 3     | Operating Voltage (VDC)    | 5～28                    |
| 4     | *Rated Current (mA)        | ≤20                     |
| 5     | *Sound Output at 30cm (dB) | ≥95                     |
| 6     | *Resonant Frequency (Hz)   | 2900±500                |
| 7     | Tone                       | Fast Pulse /Continuous  |
| 8     | Operating Temperature (°C) | -20～+65                 |
| 9     | Storage Temperature (°C)   | -30～+70                 |
| 10    | Weight (g)                 | 38                      |
| 11    | Housing Material           | ABS                     |
| 12    | RoHS                       | Yes                     |