



Box Header 2.54mm SMT / R/A / Straight / Press fit / IDC Type


Specifications

Current Rate: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

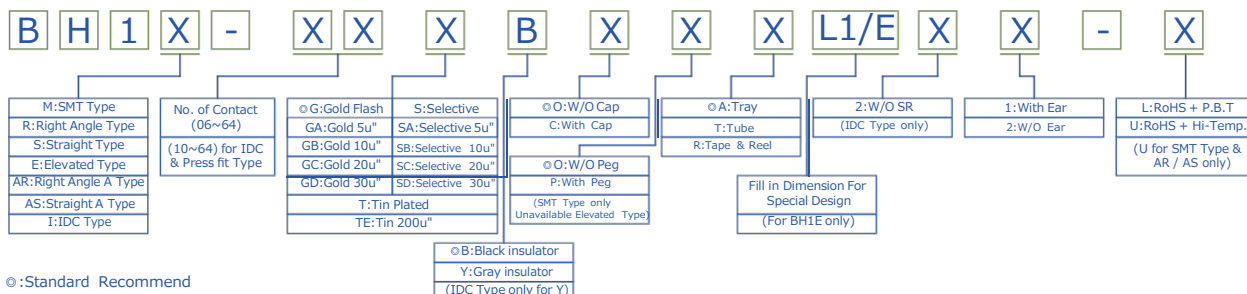


Box Header 2.54mm SMT / Right Angle / Straight Type

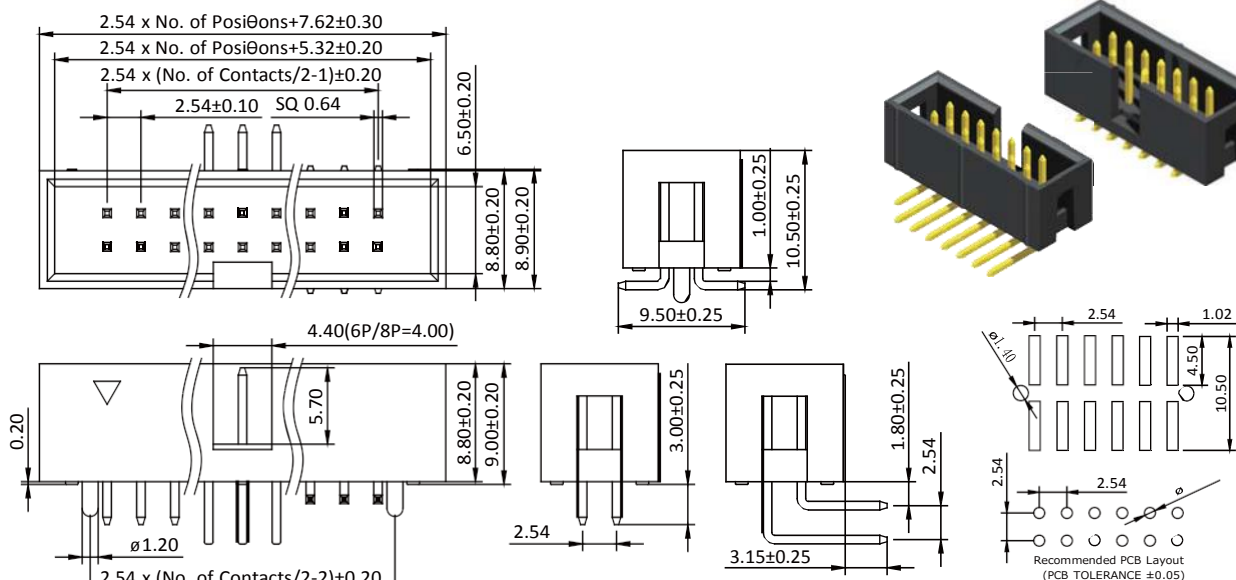

Part No.: BH1M/R/S-XX-L/U

Box Header 2.54mm Elevated SMT / Straight Type

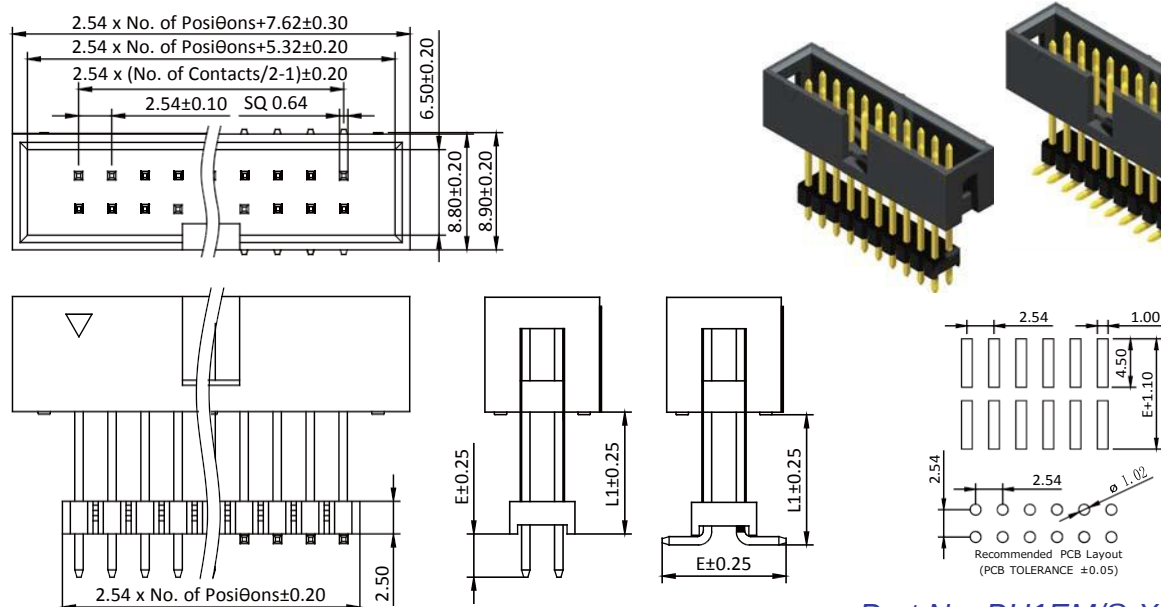


Part No.: BH1EM/S-XX-L/U

Box Header 2.54mm




Box Header 2.54mm

Box Header 2.54mm Press Fit Type

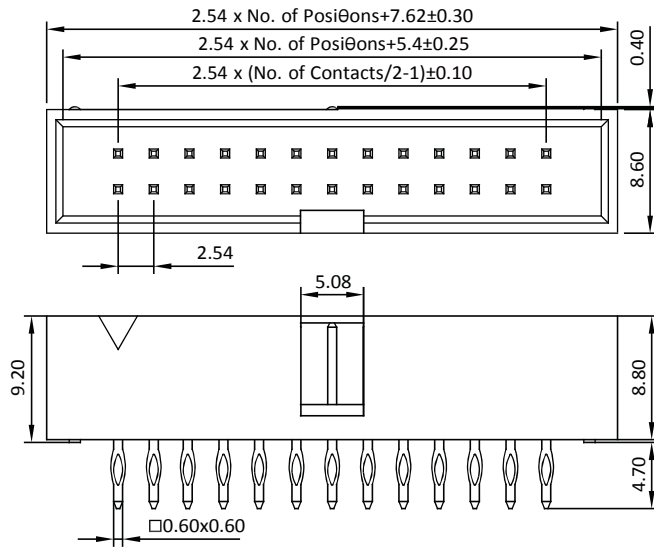


Part No.:BH1FS-XX-L

Box Header 2.54mm H=13.6mm Right Angle / Straight Type

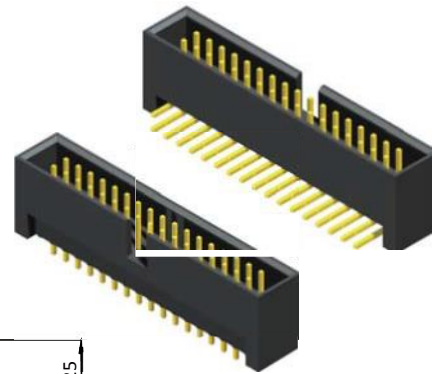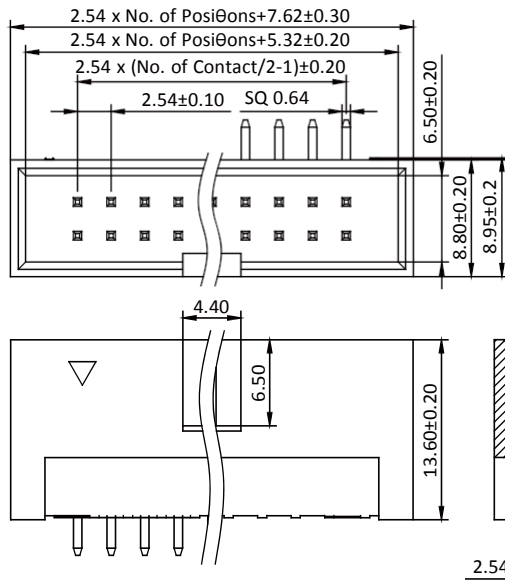

Part No.:BH1AR/S-XX-L/U

Box Header 2.54mm IDC Type

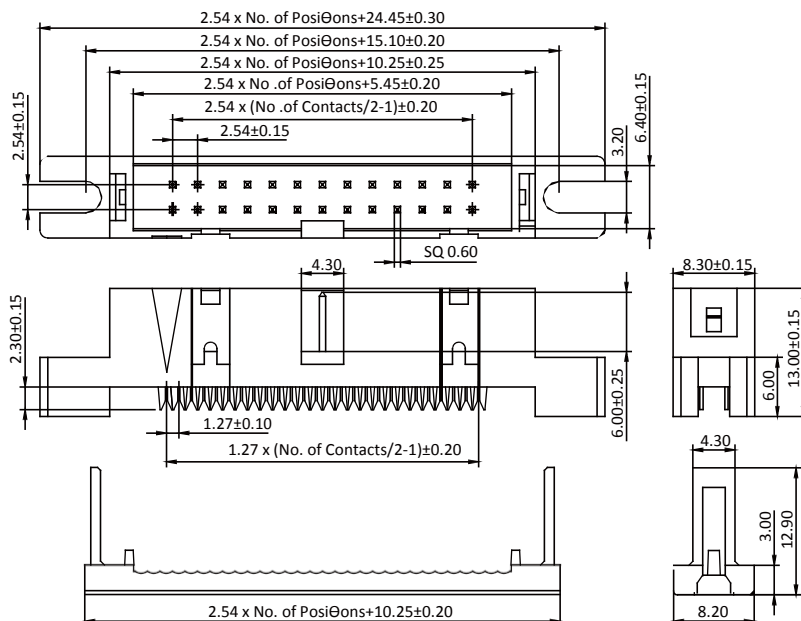

Part No.:BH1I-XX-L