

Box Header 1.27x1.27mm SMT / Right Angle / Straight Type


Specifications

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C








Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

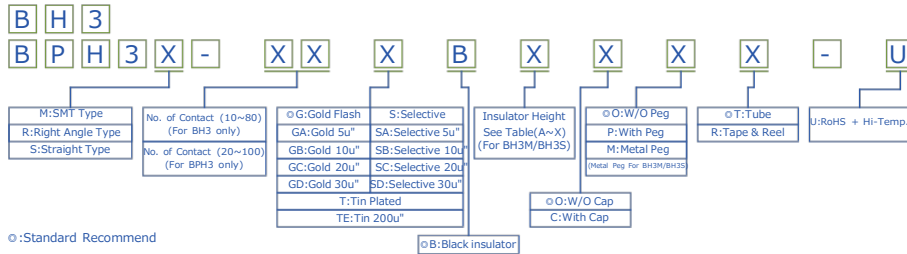

Box Header 1.27x1.27mm SMT / Straight Type


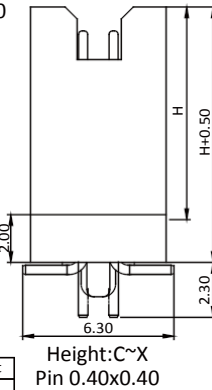

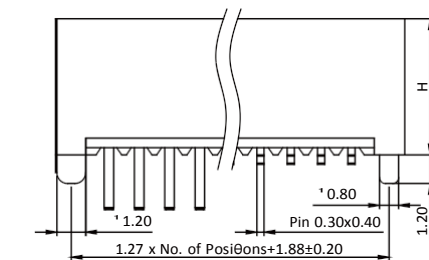


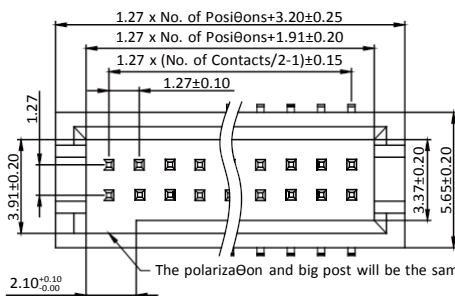


Plating Height
(Code: G For Straight Only)

Code	Height	Code	Height	Code	Height	Code	Height	Code	Height	Code	Height
A	5.70	E	10.30	I	12.20	M	17.30	R	10.40	V	17.60
B	7.30	F	11.00	J	13.50	N	3.80	S	10.70	W	18.60
C	9.40	G	11.20	K	14.20	P	9.00	T	14.10	X	18.90
D	9.60	H	11.50	L	15.20	Q	10.20	U	15.60		

Part No.: BH3M/S-XX-U

Box Header 1.27x1.27mm SMT / Right Angle / Straight Type

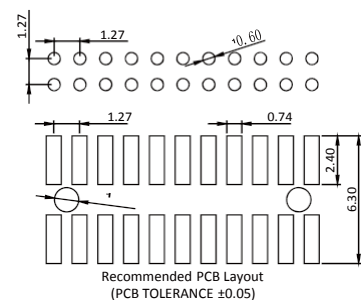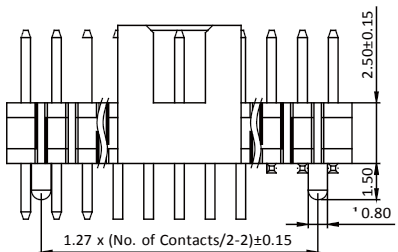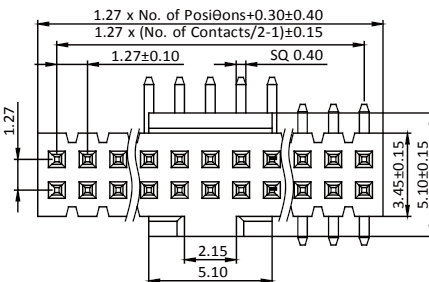

Part No.: BPH3M/R/S-XX-U