







www.toptek-hw.com

SPACER SUPPORT BS-6

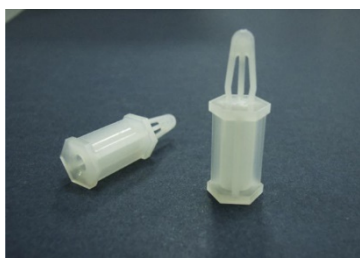

P.C.B $\phi 4.0$
THICKNESS 1.2~1.7



PART NO	A	B	PACKAGE
BS-6	6.4	4.8	1000
BS-9	9.5	8.0	1000
BS-12	12.7	11.0	1000
BS-14	14.0	12.7	1000
BS-15S	15.0	13.0	1000
BS-15	15.9	13.0	1000
BS-19	19.1	16.2	1000
BS-22	22.2	19.4	1000
BS-25	25.4	24.0	1000
BS-28	28.6	25.9	1000
BS-29	29.0	25.9	1000

NEW	BS-20-1	20.0	12.0	1000
NEW	BS-10-1	10.0	8.0	1000

MATERIAL 1 : NYLON 66(UL)

FLAME CLASS 1 : 94V-2

COLOR 1 : NATURAL

UNIT : mm

Application : To install PC board by pressing directly, another end installed with M3.5 screw or self-tapping screw.

Note : All measurement does not include gate which raises under 0.3mm.