



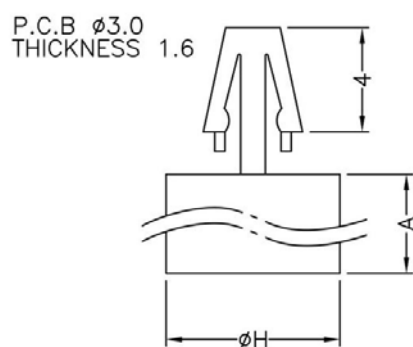

www.toptek-hw.com

SPACER SUPPORT DCB-2

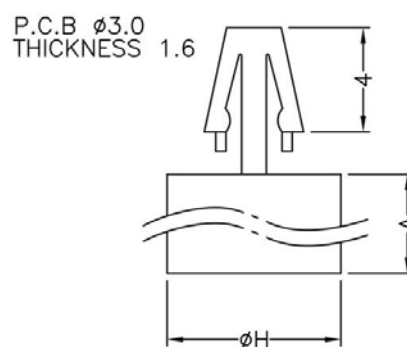

PART NO	A	B	H	PACKAGE
DCB-2	2.0	4	Ø6.5	2000
DCB-2.5	2.5	4	Ø6.5	2000
DCB-3	3.0	4	Ø6.8	1000
DCB-4	4.0	4	Ø6.8	1000
DCB-3.5	3.5	4	Ø6.8	1000
DCB-5	5.0	4	Ø6.0	1000
DCB-5.8	5.8	4	Ø6.9	1000
DCB-6	6.0	4	Ø6.8	1000
DCB-6.5	6.5	4	Ø6.0	1000
DCB-7	7.0	4	Ø6.0	1000
DCB-8	8.0	4	Ø6.8	1000

DCB-10	10.0	4	Ø6.8	1000
DCB-15	15.0	4	Ø6.0	1000
DCB-2D	2.0	3.5	Ø6.9	2000
DCB-3D	3.0	3.7	Ø6.9	2000
DCB-3.5D	3.5	4.0	Ø6.9	2000
DCB-15L	15.0	4	Ø15.0	1000
DCB-8(2)	8.0	4	Ø6.8	1000
DCB-4D	4.0	3.6	Ø7.0	1000
DCB-4.5D	4.5	3.6	Ø7.0	1000
DCB-5D	5.0	3.6	Ø7.0	1000
DCB-5.5D	5.5	4.0	Ø7.0	1000
DCB-7D	7.0	4.0	Ø7.0	1000
DCB-8D	8.0	3.85	Ø7.0	1000
DCB-9D	9.0	4.0	Ø7.0	1000
DCB-11D	11.0	3.7	Ø7.0	1000
DCB-12D	12.0	4.0	Ø7.0	1000
DCB-13D	13.0	4.0	Ø7.0	1000

MATERIAL 1 : NYLON 66(UL)

FLAME CLASS 1 : 94V-2

COLOR 1 : NATURAL

UNIT : mm

Application : To support board, to prevent short-circuit due to vibration or board bended.

Note : All measurement does not include gate, which raises under 0.3mm.