










Ejector Header 2.54mm Side Latch Type

Specifications

Current Rate:3AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester,UL 94V-0
 ◎Standard:PBT or Nylon 6T
 Terminal:Copper Alloy
 Plating:Gold Plated

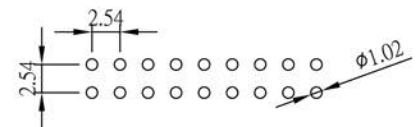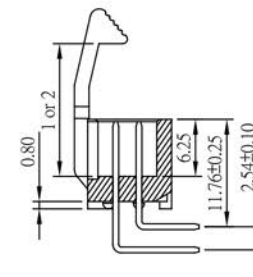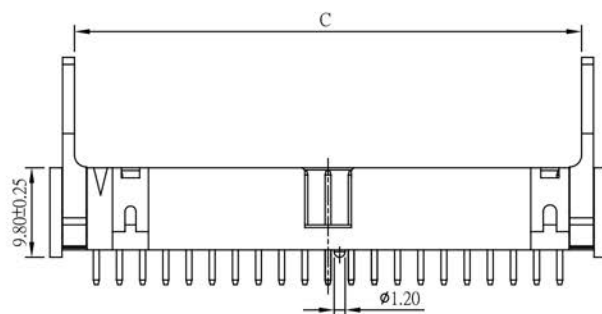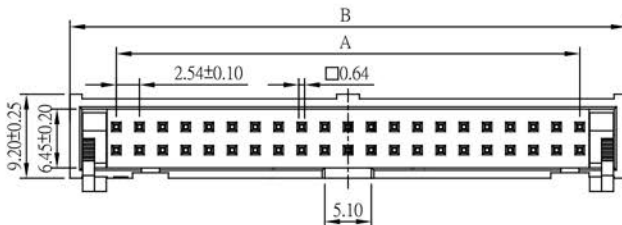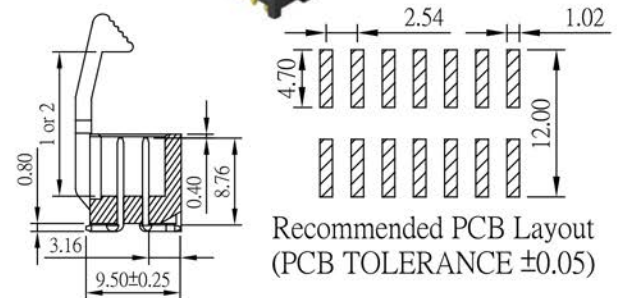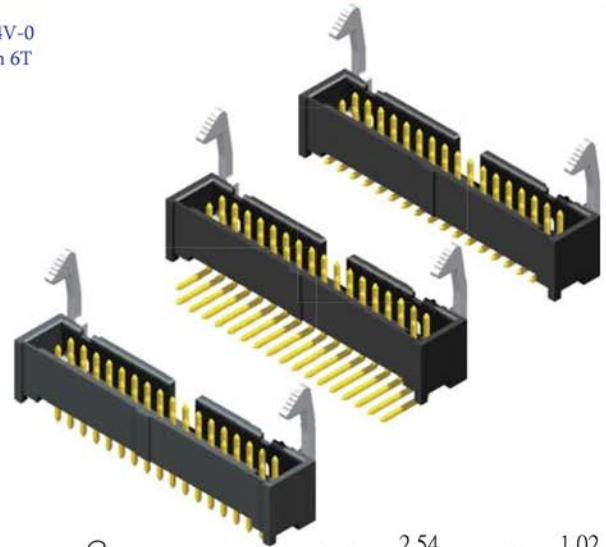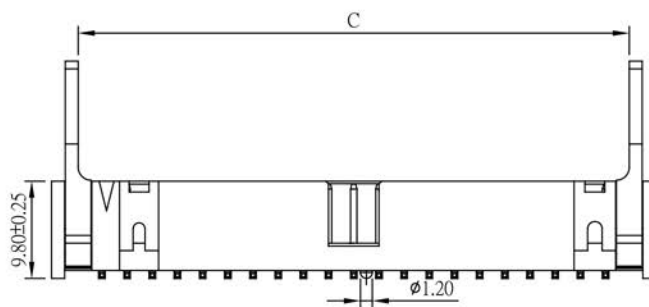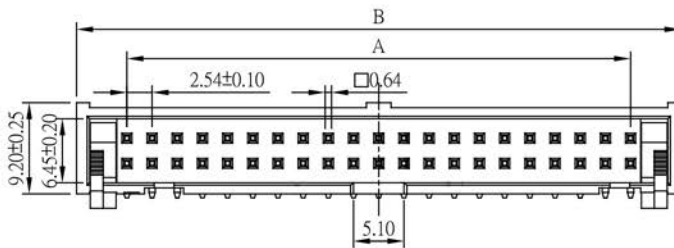

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

No. of Contacts	Dimensions		
	A	B	C
6	5.08	15.24	9.86
8	7.62	17.78	12.40
10	10.16	20.32	14.94
14	15.24	25.40	20.02
16	17.78	27.94	22.56
20	22.86	33.02	27.64
26	30.48	40.64	35.26
30	35.56	45.72	40.34
34	40.64	50.80	45.42
40	48.26	58.42	53.04
50	60.96	71.12	65.74
60	73.66	83.82	78.44
64	78.74	88.90	83.52

ORDER INFORMATION

