

Ejector Header 2.0mm SMT / Right Angle / Straight / Elevated Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated


ORDER INFORMATION

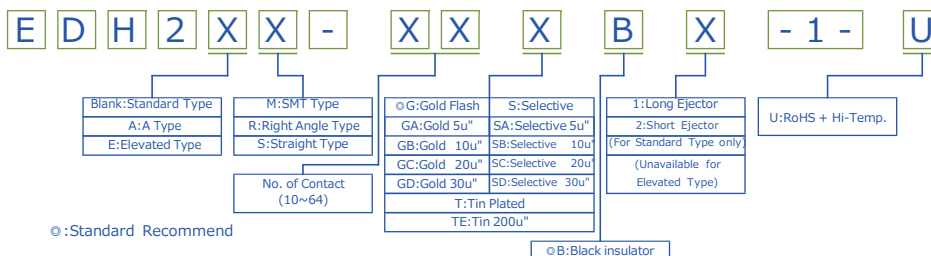

Ejector Header 2.0mm SMT / Right Angle / Straight & Elevated Type

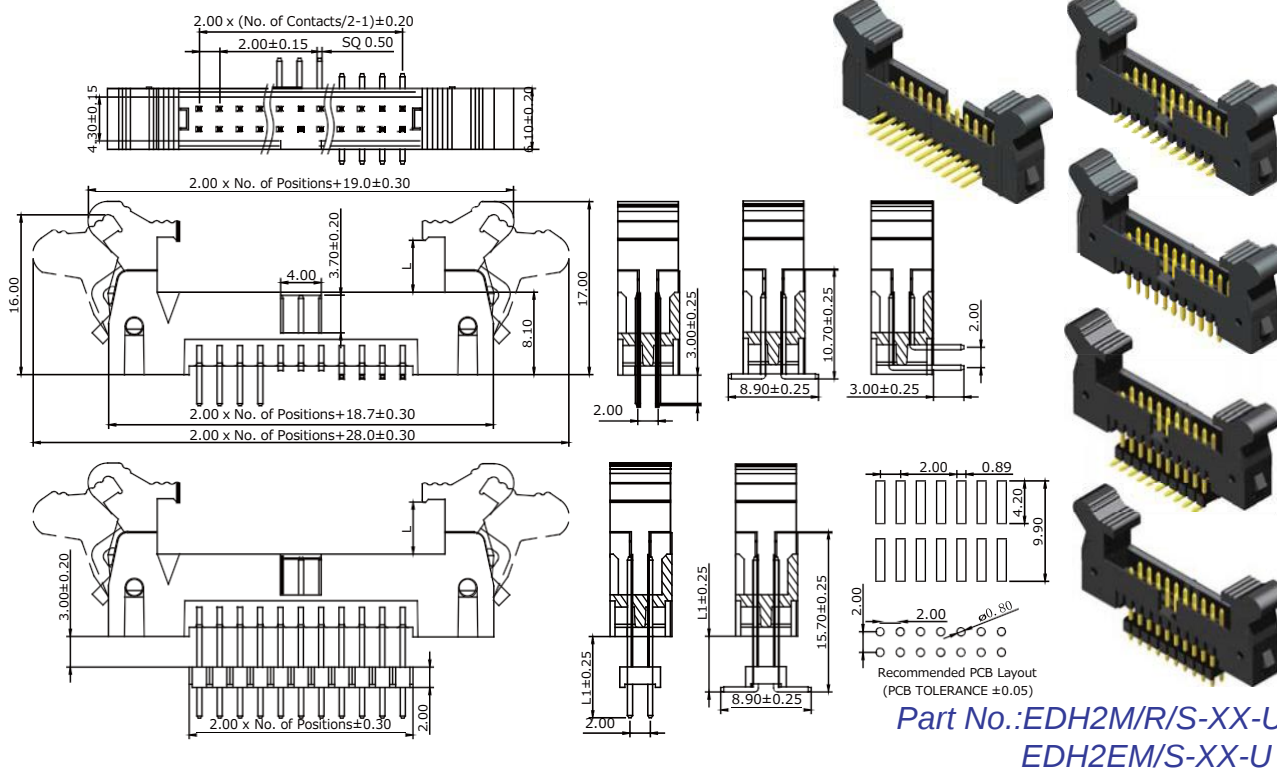

Ejector Header 2.0mm SMT / Right Angle / Straight Type

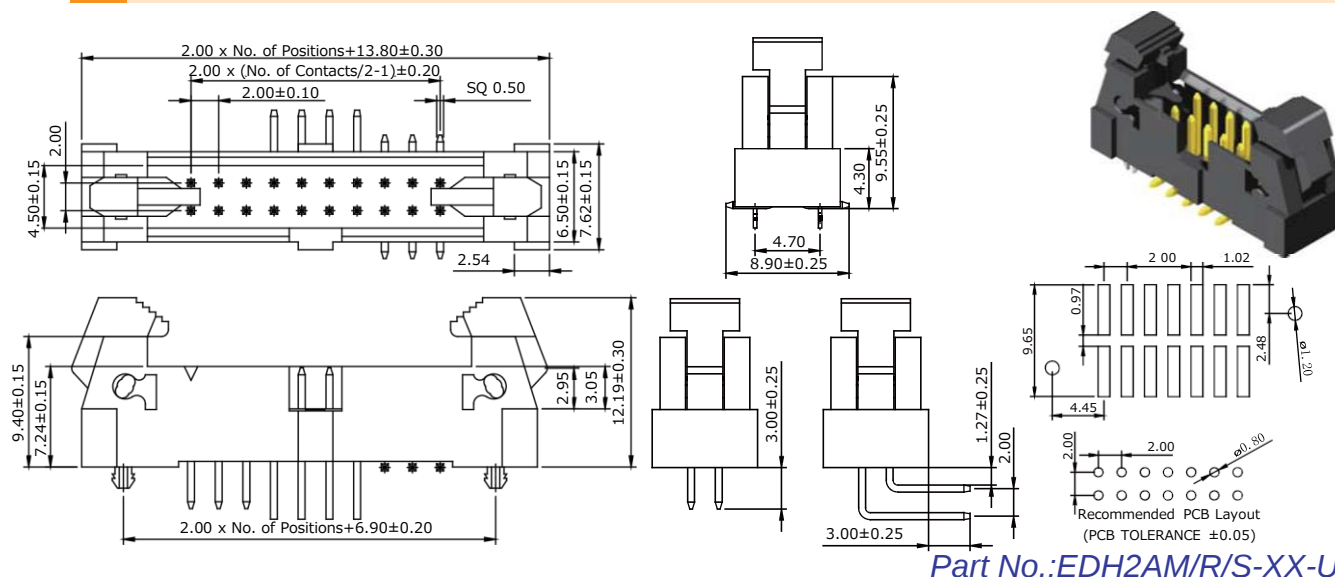

Ejector Header 2.0mm