




11




N=Number of contacts

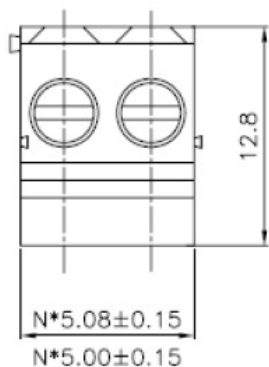

STRAIGHT TYPE

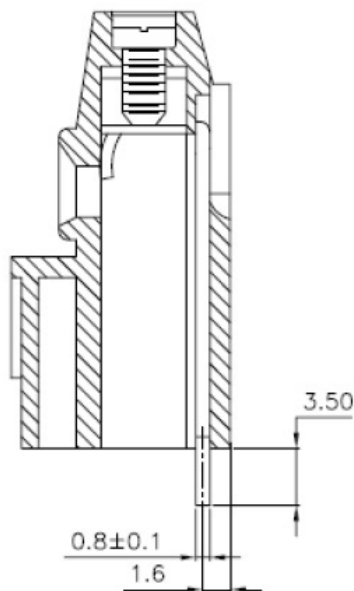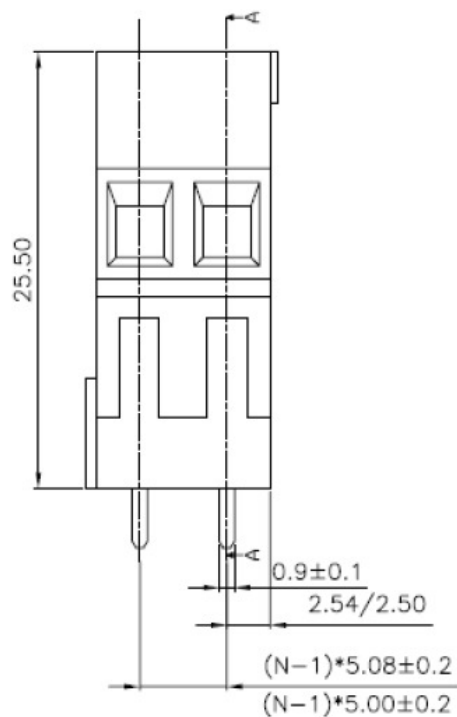

SECTION A-A



P.C.B.LAYOUT

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/27/07'		

- MATERIAL
SCREWS : M2.5 STEEL ZINC PLATED
CONTACT : BRASS
PIN HEADER : BRASS, TIN PLATED
HOUSING : PA66, UL94V-0
- ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 15A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC1500V/1Min
WIRE RANGE : 24-12AWG 2.5mm²
- MECHANICAL
TEMP.RANGE : -40°C~+105°C
MAX SOLDERING : +250°C, FOR 5 SEC.
TORQUE : 0.4Nm(3.6IB.IN)
STRIP LENGTH : 6-7mm

PRODUCT NUMBER CODE:

F128G

-

X

P

6

G

V

CONTACTS TYPE
V:STRAIGHT TYPEHOUSING COLOR
B:BLACK G:GREENCONTACT PLATING
O:GOLD FLASHCONNECTOR TYPE
P:PLUG S:SOCKETNo.OF CONTACTS
02 03 08 16SERIES No.
F128G

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	F128G-XXXXX		

PROJECTION	TITLE	EURO TERMINAL BLOCKS	
UNITS	mm	PITCH5.08, 5.00MM	
SHEET SIZE	A4	SERIES	F128G SERIES



Toptek s.r.l.
www.toptek-co.com