
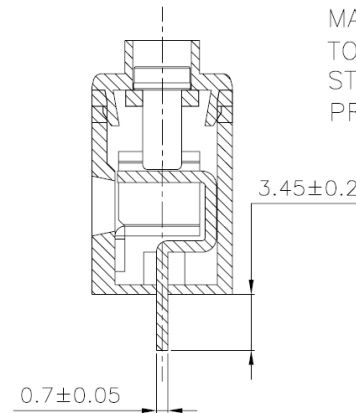
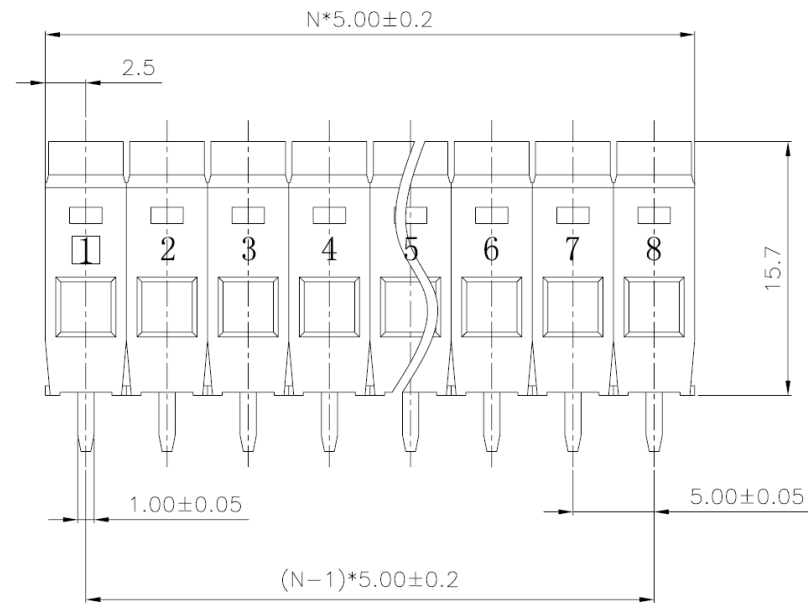


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 07/08/07'		

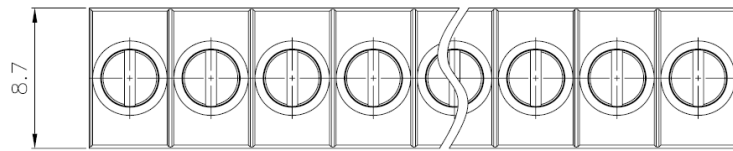

- MATERIAL
M2.5 STEEL ZINC PLATED
CONTACT : BRASS
PIN HEADER : BRASS, TIN PLATED
HOUSING : PA66, UL94V-0
- ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 10A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC1500V/1Min
WIRE RANGE : 26-16AWG 1.5mm²
- MECHANICAL
TEMP.RANGE : -40℃~+130℃
MAX SOLDERING : +250℃, FOR 5 SEC.
TORQUE: 0.5Nm (4.5lb.in)
STRIP LENGTH: 5-6mm
PRODUCT NUMBER CODE:

F169 - X

No.OF CONTACTS
02 03 08 16

SERIES No.
F169

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PLUGGABLE TERMINAL BLOCKS	
X.	±0.60	X.	±5°	UNITS	mm	PITCH5.00MM		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	F169	
.XX	±0.25	.XX	±2°	  				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	F169							
				www.toptek-co.com				

