
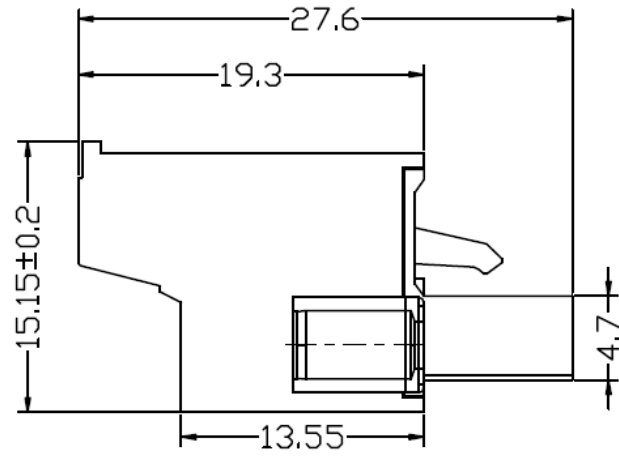
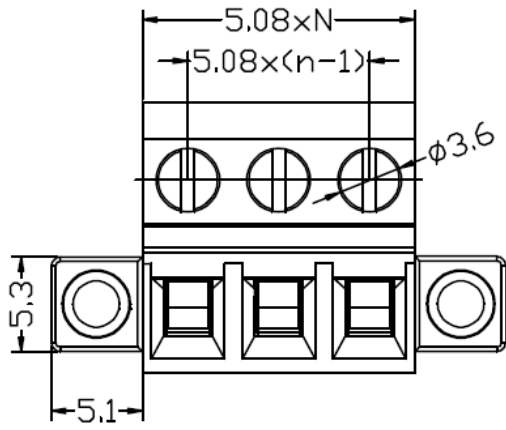


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

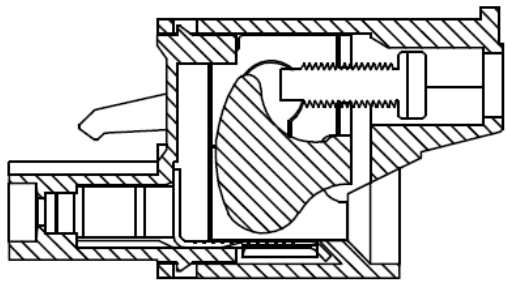

•Material
 Screws:M2.5 Steel Zinc plated
 Contact:Phosphor bronze
 Housing:PA66, UL94V-0

•Electrical
 Rated voltage:300V
 Rated current:15A
 Contact resistance:20mΩ
 Insulation resistance:5000MΩ/1000V
 Withstanding voltage:AC2000V/1Min
 Wire range:28-12AWG 2.5mm²

•Mechanical
 Temp.range : -40℃~+105℃
 Torque : 0.4Nm(3.6lb.in)
 Strip lebgtg : 7-8mm

PRODUCT NUMBER CODE:
 F203M - X X

 No.OF CONTACTS
 02 03 08 16

 PITCH5.08MM

 SERIES No.
 F203M

Disponibili con passo : 5.00, 7.5, 7.62MM

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	EURO TERMINAL BLOCKS	
X. ±0.20		X. ±2°		UNITS	mm	PITCH5.08MM		
X. ±0.10		X. ±1°		SHEET SIZE	A4	SERIES	F203M SERIES	
.XX ±0.05		.XX ±0.5°		 www.toptek-co.com				
DRAWING TYPE								
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.								