
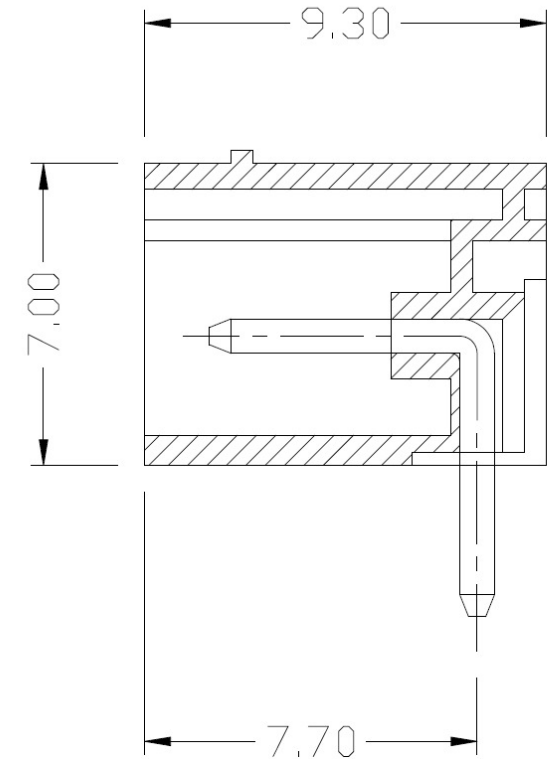


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

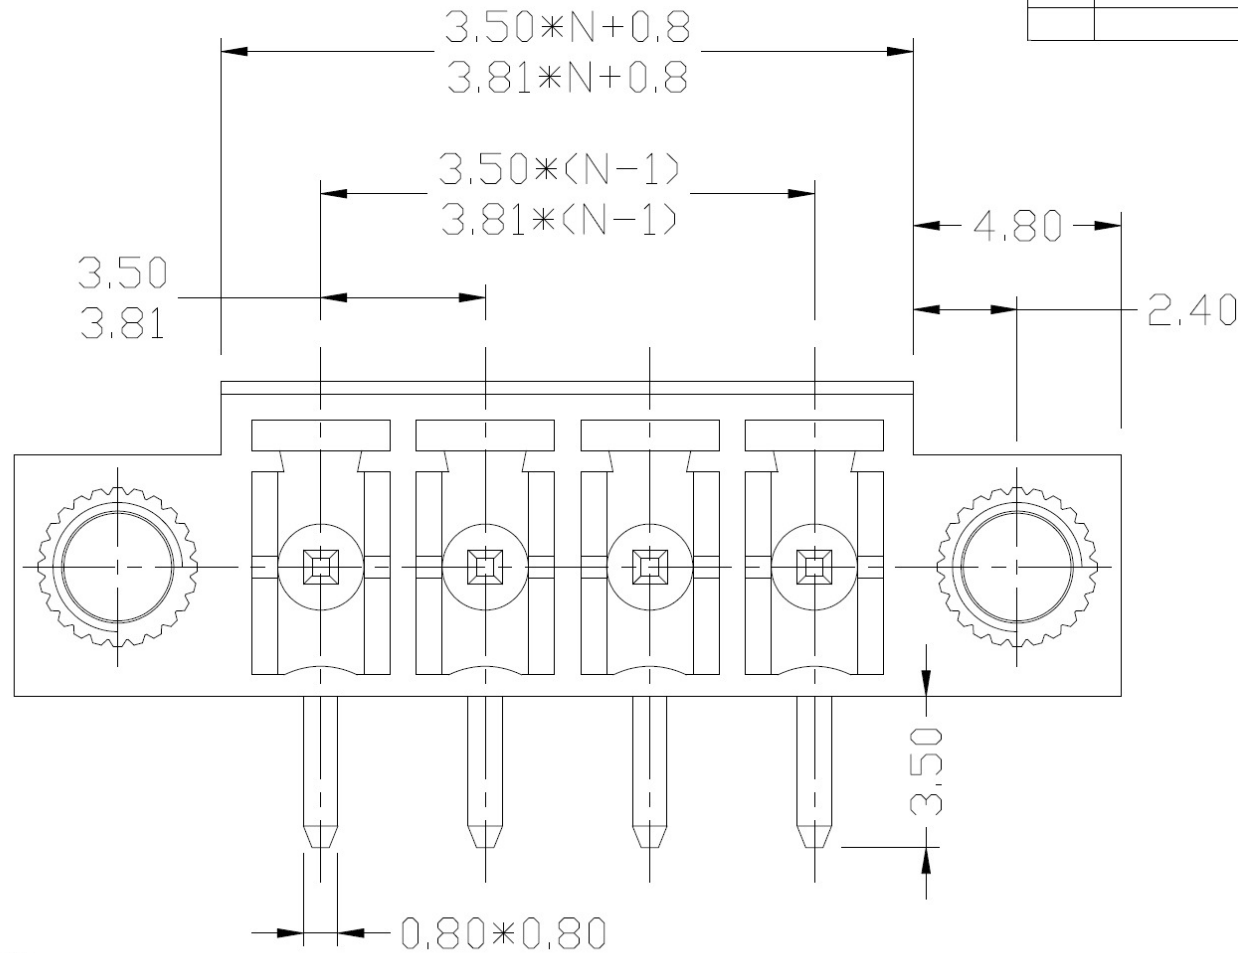

·MATERIAL

PIN HEADER : BRASS, TIN PLATED

HOUSING : PA66, UL94V-0

·ELECTRICAL

RATED VOLTAGE : 300V

RATED CURRENT : 8A

CONTACT RESISTANCE : 20mΩ


INSULATION RESISTANCE : 5000MΩ/1000V

WITHSTANDING VOLTAGE : AC1500V/1Min

·MECHANICAL

TEMP.RANGE : -40℃ ~ +105℃

MAX SOLDERING : +250℃, FOR 5 SEC.



F222-3.5R
F222-3.81R

PRODUCT NUMBER CODE :

F222 - 3.50R/3.81R - XXP

XX = Number of pole

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	F222-3.50R/3.81R	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	F222
.XX	±0.25	.XX	±2°	 ELECTRONIC ELECTRONIC COMPONENTS   www.toptek-co.com Toptek s.r.l. www.toptek-co.com			
DRAWING TYPE		COMPONENTS					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.							