
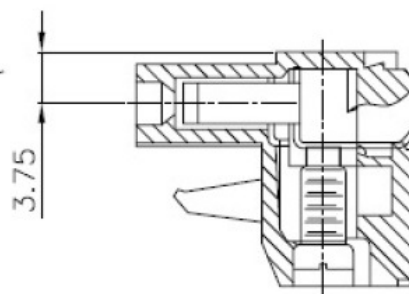


5

DIM.A SEE TABLE A

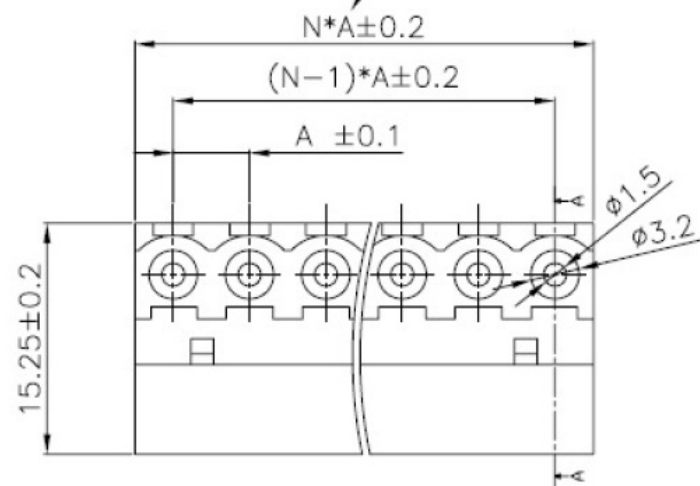

SECTION A-A

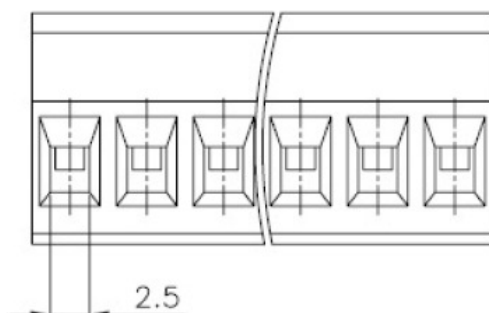
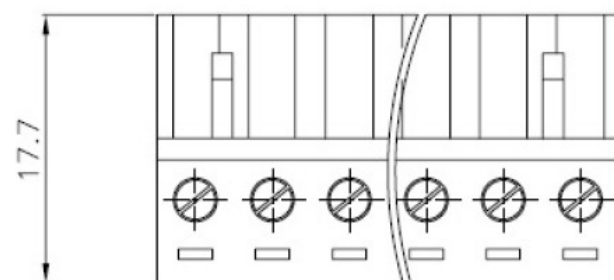


TABLE A

TYPE	Dimension
	A
1	5.00
2	5.08
3	7.62

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	TYF 06/03/04'	谭玉芬	

- MATERIAL
CONTACT : PHOSPHOR BRONZE
SCREWS : M2.5 STEEL ZINC PLATED
HOUSING : PA66, UL94V-0
- ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 16A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC2000V/1Min
WIRE RANGE : 28-12AWG 2.5mm²

- MECHANICAL
TEMP.RANGE : -40℃~+105℃
MAX SOLDERING : +250℃, FOR 5 SEC.
TORQUE : 0.4Nm(3.6LB.IN)
STRIP LENGTH : 7-8mm

PRODUCT NUMBER CODE:

F2EDG - X X X X

HOUSING COLOR
B:BLACK G:GREENCONTACT PLATING
O:GOLD FLASH 6: TINCONNECTOR TYPE
P:PLUG S:SOCKETNo.OF CONTACTS
02 03 08 16SERIES No.
F2EDG 5.00/5.08/7.62

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	F2EDG-XXXX		

PROJECTION	TITLE	PLUGGABLE TERMINAL BLOCKS	
UNITS	mm	PITCH 5.0, 5.08, 7.50, 7.62MM	
SHEET SIZE	A4	SERIES	F2EDG SERIES

Toptek s.r.l. Via Turbada, 15/a - 23900 - Lecco

Tel. +39 0341 504 791 Fax. +39 0341 367 607