

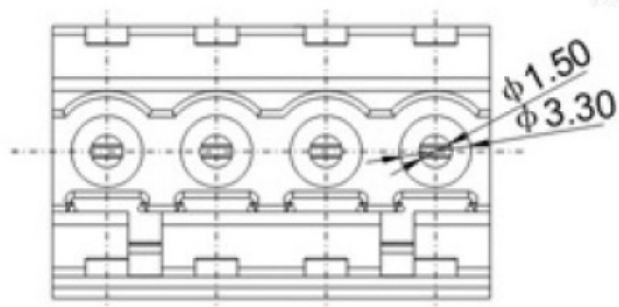


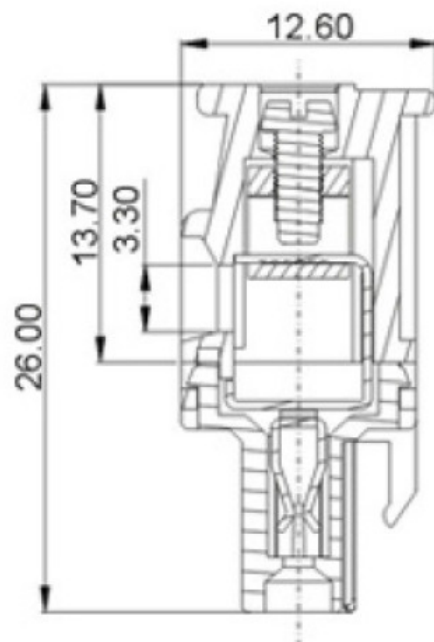

NX7.62-1.8
NX7.50-1.8
NX5.08
NX5.00

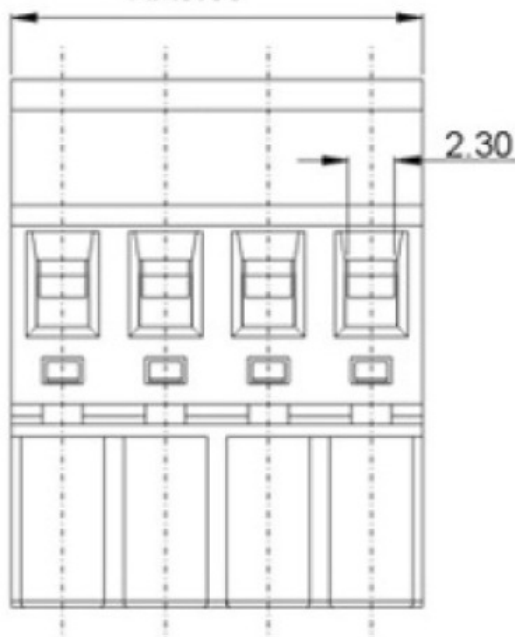

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	TYF 06/04/05	譚玉芬	

- MATERIAL
CONTACT : PHOSPHOR BRONZE
SCREWS : M2.5 STEEL ZINC PLATED
HOUSING : PA66, UL94V-0
- ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 16A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC1500V/1Min
WIRE RANGE : 28-12AWG 2.5mm²
- MECHANICAL
TEMP. RANGE : -40℃~+105℃
MAX SOLDERING : +250℃, FOR 5 SEC.
TORQUE : 0.5Nm(4.5IB.IN)
STRIP LENGTH : 7-8mm

PRODUCT NUMBER CODE:

F2EDGKB- X X X X

TABLE A

TYPE	Dimension
	A
1	5.00
2	5.08
3	7.50
4	7.62

- HOUSING COLOR
B:BLACK G:GREEN

- CONTACT PLATING
0:GOLD FLASH 6: TIN

- CONNECTOR TYPE
P:PLUG S:SOCKET

No.OF CONTACTS				
02	03	08	16	

SERIES No.

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	PLUGGABLE TERMINAL BLOCKS
UNITS	mm		PITCH 5.00,5.08,7.5,7.62MM
SHEET SIZE	A4	SERIES	F2EDGK SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	F2EDGK-XXXX		

Toptek s.r.l. Via Turbada, 15/a - 23900 - Lecco

Tel. +39 0341 504 791 Fax. +39 0341 367 607