

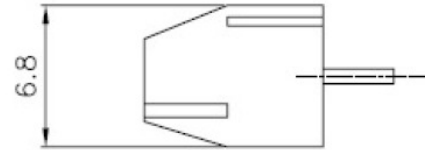



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 07/01/07'		

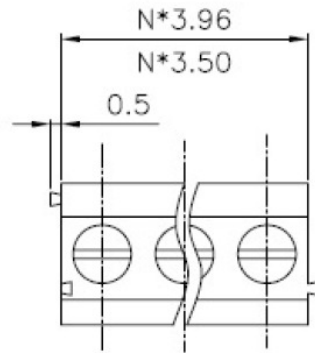

STRAIGHT TYPE



SECTION A-A

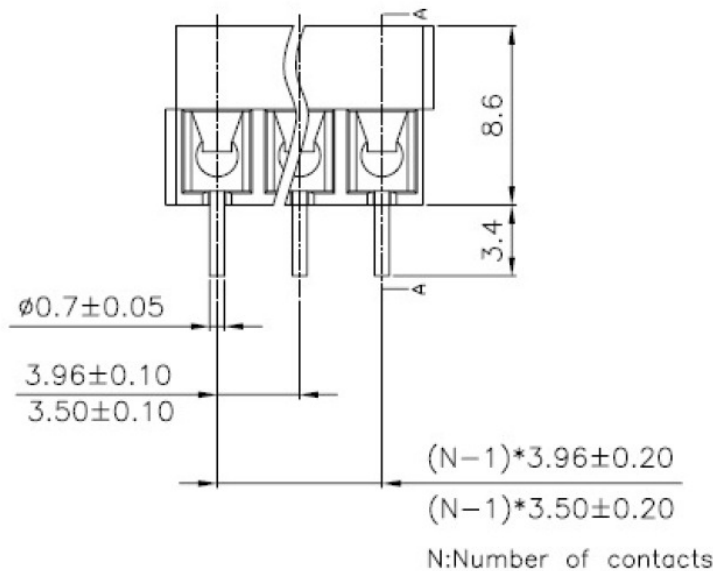


• MATERIAL
 SCREWS : M2 STEEL ZINC PLATED
 WIRE GAUED : PHOSPHOR BRONZE NI
 PLATRD OR STAINLESS STEEL
 PIN HEADER : BRASS, TIN PLATED
 HOUSING : PA66, UL94V-0

• ELECTRICAL
 RATED VOLTAGE : 300V
 RATED CURRENT : 10A
 CONTACT RESISTANCE : 20mΩ
 INSULATION RESISTANCE : 5000MΩ/1000V
 WITHSTANDING VOLTAGE : AC2000V/1Min
 WIRE RANGE : 24-18AWG 1mm²

• MECHANICAL
 TEMP.RANGE : -40°C~+105°C
 MAX SOLDERING : +250°C, FOR 5 SEC.
 TORQUE : 0.2Nm(1.7LB.IN)
 STRIP LENGTH : 4.5-5mm

PRODUCT NUMBER CODE:

F350V F396V - X X
 No.OF CONTACTS
 02 03 08 16
 PITCH 3.5 3.96MM
 SERIES No.
 F350V F396V

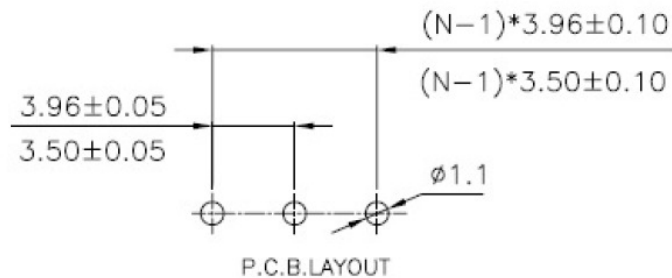

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	F350V, F396V-XXXXX		

PROJECTION		TITLE		EURO TERMINAL BLOCKS
UNITS	mm	PITCH3.96, 3.50MM		
SHEET SIZE	A4	SERIES	F350V, F396V SERIES	
 TOPTEK www.toptek-co.com Toptek s.r.l. Via Turbada, 15/a - 23900 - Lecco Tel. +39 0341 504 791 Fax. +39 0341 367 607  www.toptek-co.com				