
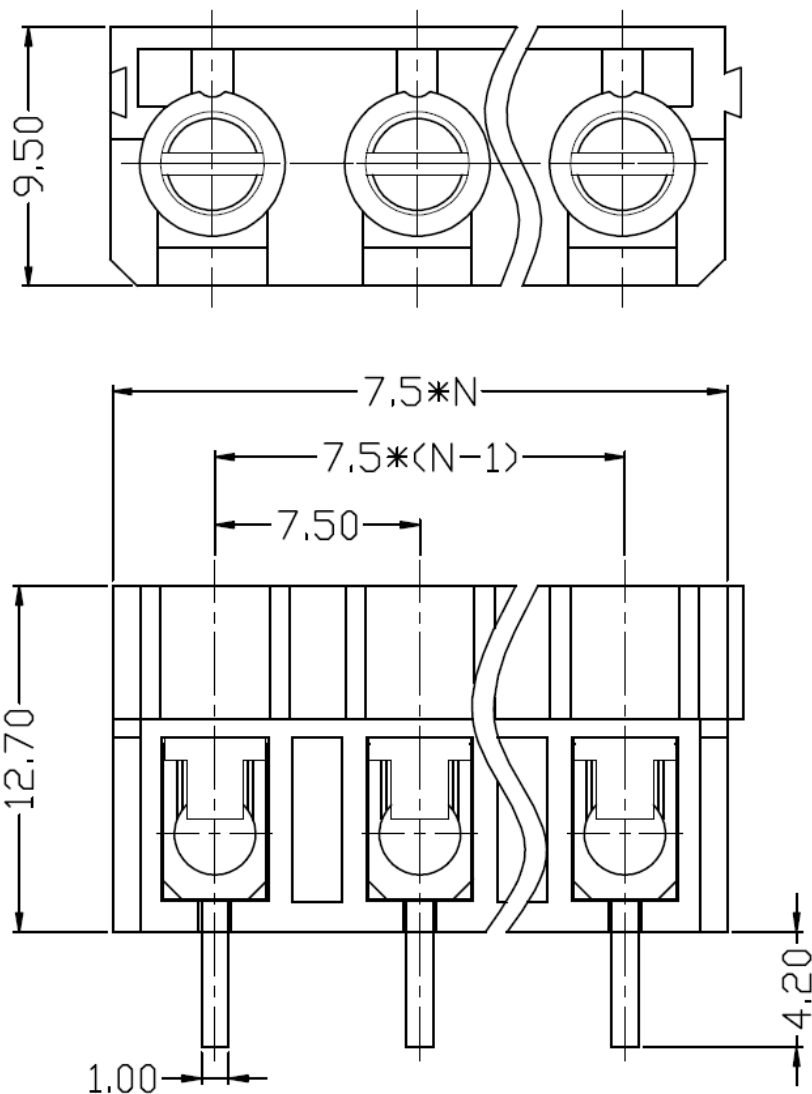


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

·MATERIAL
SCREW : M3 STEEL ZINC PLATED
WIRE GUARD : PHOSPHOR BRONZE NI PLATED
OR STAINLESS STEEL
PIN HEADER : BRASS, TIN PLATED
HOUSING : PA66, UL94V-0

·ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 16A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC2000V/1Min
WIRE RANGE : 14-24AWG 2.5mm²

·MECHANICAL
TEMP.RANGE : -40℃~+105℃
MAX SOLDERING: +250℃ FOR 5 SEC
TORQUE : 0.4Nm(3.8lB.IN)
STRIP LENGTH : 4.5-5mm

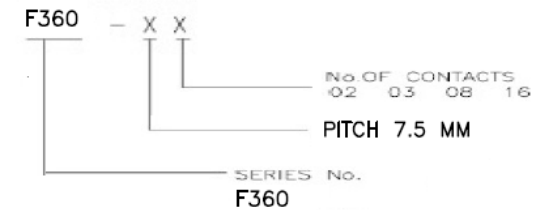

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	EURO TERMINAL BLOCKS	
X.	±0.25	X.	±5°	UNITS	mm		PITCH 7.5 MM	
.X	±0.15	.X	±3°	SHEET SIZE	A4	SERIES	F360	SERIES
.XX	±0.10	.XX	±2°					
DRAWING TYPE				www.toptek-co.com				
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.								