






www.tiptek-hw.com

LED SPACER SUPPORT LED-1

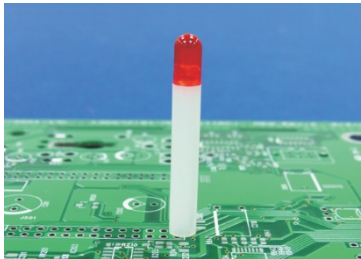

MATERIAL 1 : NYLON 66(UL)
 FLAME CLASS 1 : 94V-0,94V-2
 COLOR 1 : BLACK,NATURAL
 UNIT : mm
 Application : To protect $\phi 5\text{mm}$ LED and stand up on board with same height, but avoid pins bended, broken, and short-circuit.

PART NO	A	L	P	PACKAGE
LED-1	1.0	5	1	2000
LED-1.5	1.5	5	1	2000
LED-2	2.0	5	1	2000
LED-2.5	2.5	5	1	2000
LED-3	3.0	5	1	2000
LED-3.5	3.5	5	1	2000
LED-4	4.0	5	1	2000
LED-4.5	4.5	5	1	2000
LED-5	5.0	5	1	2000
LED-5.5	5.5	5	1	2000
LED-6	6.0	5	1	2000

LED-6.5	6.5	5	1	2000
LED-6.8	6.8	5	1	2000
LED-7	7.0	5	1	2000
LED-7.5	7.5	5	1	2000
LED-8	8.0	5	1	2000
LED-8.5	8.5	5	1	2000
LED-8.8	8.8	5	1	2000
LED-9	9.0	5	1	2000
LED-9.5	9.5	5	1	2000
LED-10	10.0	5	1	2000
LED-10.5	10.5	5	1	2000
LED-11	11.0	5	1	2000
LED-11.5	11.5	5	1	2000
LED-12	12.0	5	1	2000
LED-12.5	12.5	5	1	2000
LED-13	13.0	5	1	2000
LED-13.5	13.5	5	1	2000
LED-14	14.0	5	1	1000
LED-14.5	14.5	5	1	1000
LED-15	15.0	5	1	1000
LED-15.5	15.5	5	1	1000
LED-17	17.0	5	1	1000
LED-10S	10.0	5	1	2000
LED-16	16.0	5	1	1000
LED-16.5	16.5	5	1	1000
LED-17.5	17.5	5	1	1000
LED-17.7	17.7	5	1	1000
LED-18	18.0	5	1	1000
LED-18.5	18.5	5	1	1000
LED-19	19.0	5	1	1000
LED-19.5	19.5	5	1	1000
LED-20	20.0	5	1	1000
LED-20.5	20.5	5	1	1000
LED-21	21.0	5	1	1000

LED-21.5	21.5	5	1	1000
LED-22	22.0	5	1	1000
LED-22.5	22.5	5	1	1000
LED-23	23.0	5	1	1000
LED-23.5	23.5	5	1	1000
LED-24	24.0	5	1	1000
LED-28	28.0	5	1	1000
