





www.tiptek-hw.com

LED SPACER SUPPORT LED3X13-1

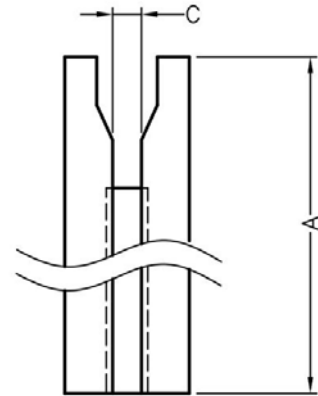

MATERIAL 1 : NYLON 66(UL)



FLAME CLASS 1 : 94V-2

COLOR 1 : NATURAL



UNIT : mm

Application : To protect and fix discolor LED on board with same height, but avoid pins bended, broken, and short-circuit.

^ For the first two items in the table

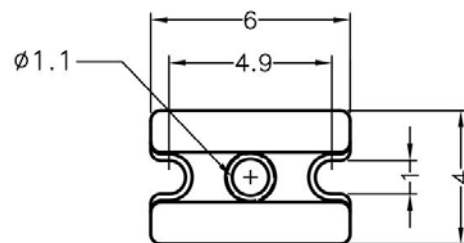

^ Just for LED3X8R

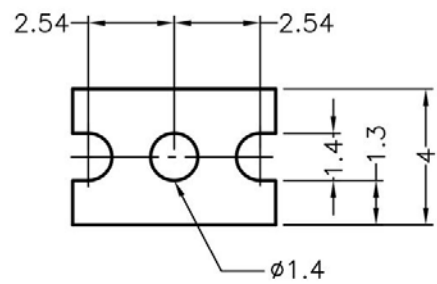

^ Just for LED3X1.5R

PART NO	A	B	C	E	P	PACKAGE
LED3X13-1	13.0	7.0	0.8	3.5	1	1000
LED3X16-1	16.0	6.0	0.9	3.9	1	1000
LED3X8R						2000
LED3X1.5R						2000

MATERIAL 1 : NYLON 66(UL)

FLAME CLASS 1 : 94V-2

COLOR 1 : NATURAL

UNIT : mm

Application : To protect and fix discolor LED on board with same height, but avoid pins bended, broken, and short-circuit.