







www.toptek-hw.com

LED SPACER SUPPORT LEDK-4S




MOUNTING HOLES

^ For LEDK-4S

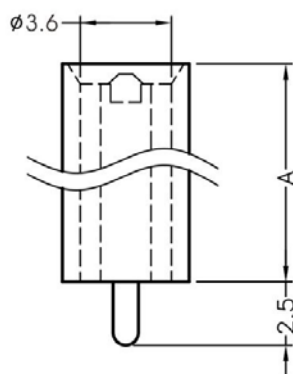

^ Just for LEDK-x

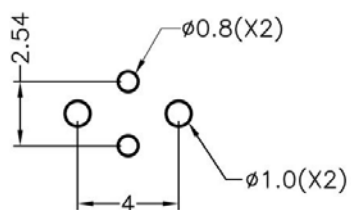

MOUNTING HOLES

^ For all except LEDK-4S

PART NO	L	A	B	C	P	PACKAGE
LEDK-4S		4.0	4.2	3.6		2000
LEDK-5		5.0	5.6	3.8		2000

	LEDKU-2	3.0	5.0	3.8	1000
	LEDK-2	2.0	5.0	3.6	2000
	LEDK-3	3.0	5.0	3.6	2000
	LEDK-4	4.0	5.0	3.6	2000
	LEDK-6	6.0	5.0	3.6	2000
	LEDK-7	7.0	5.0	3.6	2000
	LEDK-8	8.0	5.0	3.6	2000
	LEDK-9	9.0	5.0	3.6	2000
	LEDK-10	10.0	5.0	3.6	2000
	LEDK-11	11.0	5.0	3.6	1000
	LEDK-11.5	11.5	5.0	3.6	1000
	LEDK-12	12.0	5.0	3.6	1000
	LEDK-12.5	12.5	5.0	3.6	1000
	LEDK-13	13.0	5.0	3.6	1000
	LEDK-14	14.0	5.0	3.6	1000
	LEDK-18	18.0	5.0	3.6	1000
NEW	LEDK-20	20.0	5.0	3.6	1000

MATERIAL 1 : NYLON 66(UL)

FLAME CLASS 1 : 94V-2

COLOR 1 : NATURAL

UNIT : mm

Application : To protect $\phi 5$ mm LED and stand up on board with same height and clapboard, indexing pins designed, but avoid pins bended, broken, short-circuit, and crooked.