





www.toptek-hw.com

LED SPACER SUPPORT LEDS-4S

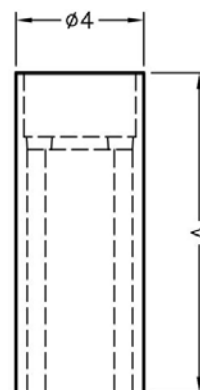

FOR:LEDS-XXS



MATERIAL 1 : NYLON 66(UL)

FLAME CLASS 1 : 94V-0,94V-2

COLOR 1 : BLACK,NATURAL

UNIT : mm

Application : To protect $\phi 3\text{mm}$ LED and stand up on board with same height, but avoid pins bended, broken, and short-circuit, no fixture necessary, all sizes you need.

PART NO	A	L	P	PACKAGE
LEDS-4S	4.0	3.0	1	2000
LEDS-3S	3.0	3.0	1	2000
LEDS-4.5S	4.5	3.0	1	2000
LEDS-5S	5.0	3.0	1	2000
LEDS-5.5S	5.5	3.0	1	2000
LEDS-6S	6.0	3.0	1	2000
LEDS-6.5S	6.5	3.0	1	2000
LEDS-7S	7.0	3.0	1	2000
LEDS-7.5S	7.5	3.0	1	2000
LEDS-8S	8.0	3.0	1	2000
LEDS-8.5S	8.5	3.0	1	2000

LEDS-9S	9.0	3.0	1	2000
LEDS-9.5S	9.5	3.0	1	2000
LEDS-10S	10.0	3.0	1	2000
LEDS-11S	11.0	3.0	1	2000
LEDS-11.5S	11.5	3.0	1	2000
LEDS-12S	12.0	3.0	1	2000
LEDS-12.5S	12.5	3.0	1	2000
LEDS-13S	13.0	3.0	1	2000
LEDS-13.5S	13.5	3.0	1	2000
LEDS-14.5S	14.5	3.0	1	2000
LEDS-15S	15.0	3.0	1	2000
LEDS-15.5S	15.5	3.0	1	2000
LEDS-16S	16.0	3.0	1	1000
LEDS-16.5S	16.5	3.0	1	1000
LEDS-17S	17.0	3.0	1	1000
LEDS-17.5S	17.5	3.0	1	1000
LEDS-18S	18.0	3.0	1	1000
LEDS-18.5S	18.5	3.0	1	1000
LEDS-19S	19.0	3.0	1	1000
LEDS-20S	20.0	3.0	1	1000
LEDS-20.5S	20.5	3.0	1	1000
LEDS-21S	21.0	3.0	1	1000
LEDS-21.5S	21.5	3.0	1	1000
LEDS-22S	22.0	3.0	1	1000
LEDS-22.5S	22.5	3.0	1	1000
LEDS-23S	23.0	3.0	1	1000

MATERIAL 1 : NYLON 66(UL)

FLAME CLASS 1 : 94V-0,94V-2

COLOR 1 : BLACK,NATURAL

UNIT : mm

Application : To protect $\phi 3\text{mm}$ LED and stand up on board with same height, but avoid pins bended, broken, and short-circuit, no fixture necessary, all sizes you need.