## Machine Pin Header SMT / Right Angle / Straight Type 1.27mm

**SPECIFICATION**
Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:10mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

**MATERIAL**
Insulator:Polyester,UL 94V-0
◎Standard:PPS
Contact Pin:Copper Alloy
Contact Plating:Gold Flash all over

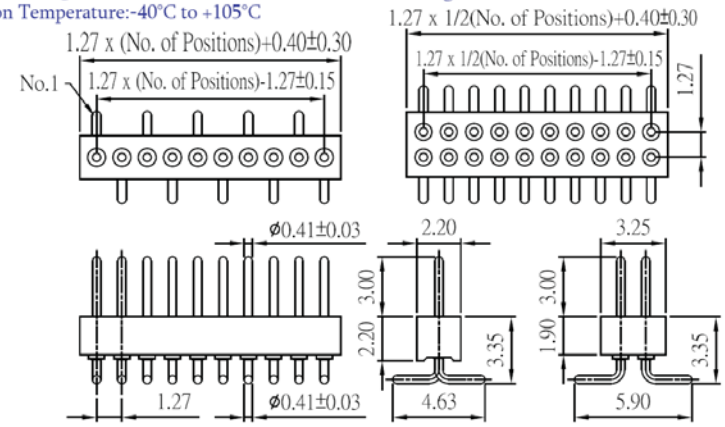


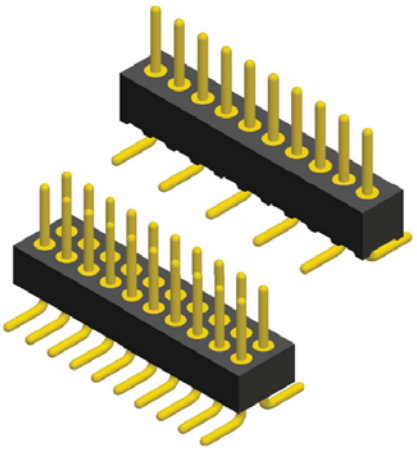

Part No.:MH3M-1/2XX-U

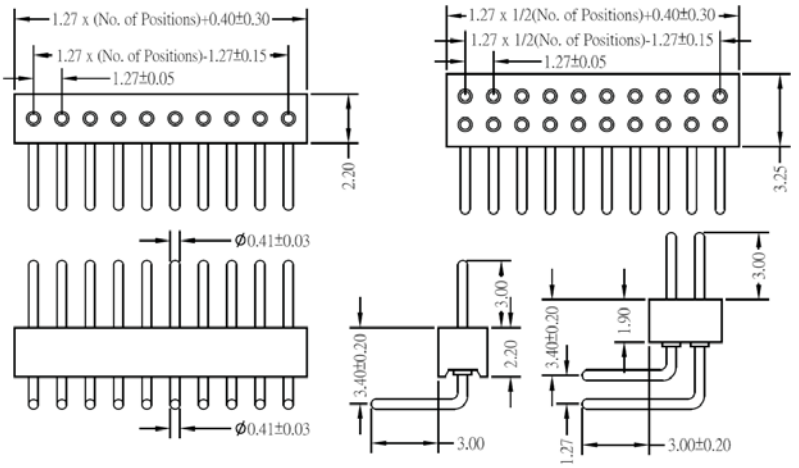


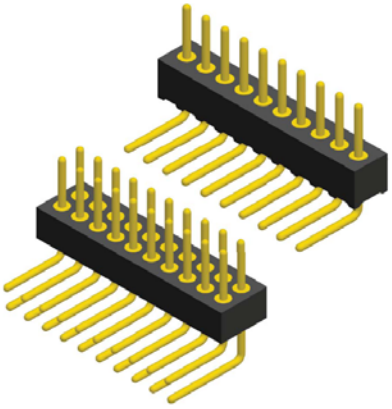

Part No.:MH3R-1/2XX-U

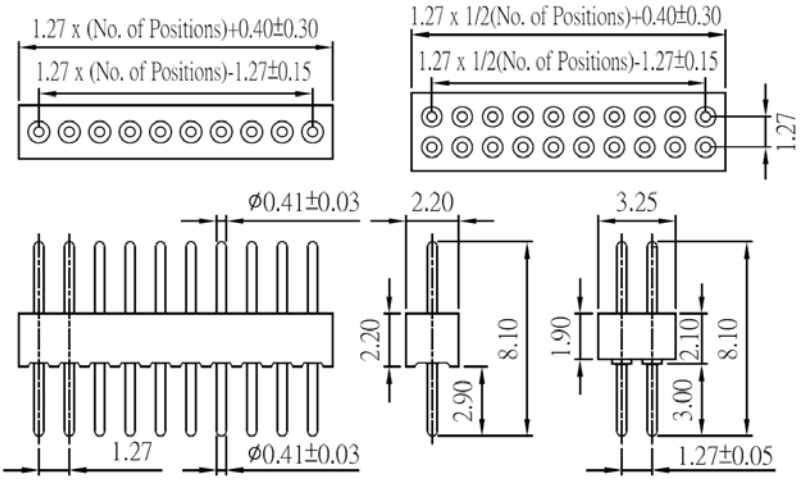


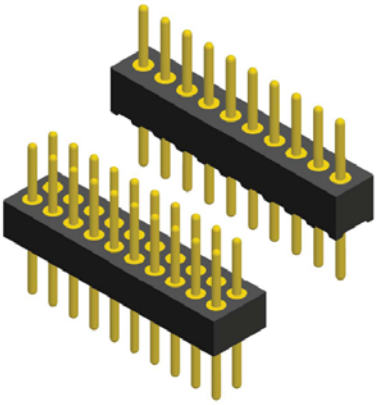

Part No.:MH3S-1/2XX-U

## ORDER INFORMATION

M H 3 X - X X X X B - U

- M: M:SMT / R:Right Angle / S:Straight
- X: 1:Single Row / 2:Dual Row
- XX: No. of Contacts (03~50)
- X: ◎G:Gold Flash / GA:Gold 5u" / GB:Gold 10u" / GC:Gold 20u" / GD:Gold 30u"
- B: ◎B:Black Insulator
- U: U:RoHS + PPS

◎:Standard Recommended