

CONNECTORS MANUFACTURER



Machine Pin Header IC SMT / Straight Type 2.54mm

SPECIFICATION

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:10mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C



MATERIAL

Insulator:Polyester,UL 94V-0
©Standard:PBT or PPS
Contact Pin:Copper Alloy
Contact Plating:Gold Flash all over

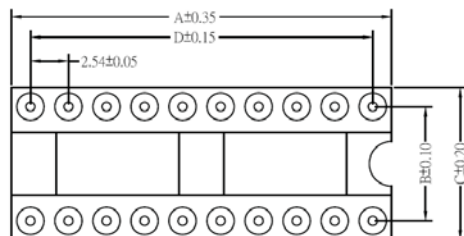


No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
6	7.62	7.62	10.16	5.08	24	30.48	15.24	17.70	27.94
8	10.16	7.62	10.16	7.62	28	35.56	15.24	17.70	33.02
14	17.70	7.62	10.16	15.24	32	40.64	15.24	17.70	38.10
16	20.32	7.62	10.16	17.78	36	45.70	15.24	17.70	43.18
18	22.86	7.62	10.16	20.32	40	50.80	15.24	17.70	48.26
20	25.40	7.62	10.16	22.86	42	53.30	15.24	17.70	50.80
24	30.48	7.62	10.16	27.94	48	60.96	15.24	17.70	58.42
28	35.56	7.62	10.16	33.02	50	63.50	15.24	17.70	60.96
					52	66.04	22.86	17.70	63.50
No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
20	25.40	10.16	12.60	22.86	50	63.50	22.86	25.30	60.96
22	27.94	10.16	12.60	25.40	52	66.04	22.86	25.30	63.50
24	30.48	10.16	12.60	27.94	64	81.20	22.86	25.30	78.74
28	35.56	10.16	12.60	33.02					
32	40.64	10.16	12.60	38.10					

Code
100
100A
1196
1220
1370

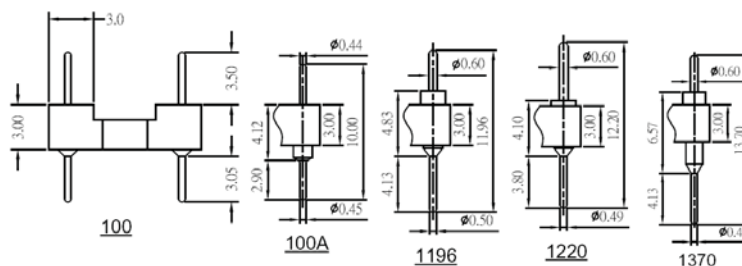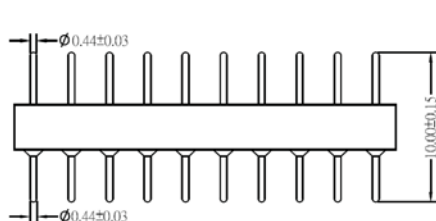

Part No.:MHIC-XXX-L

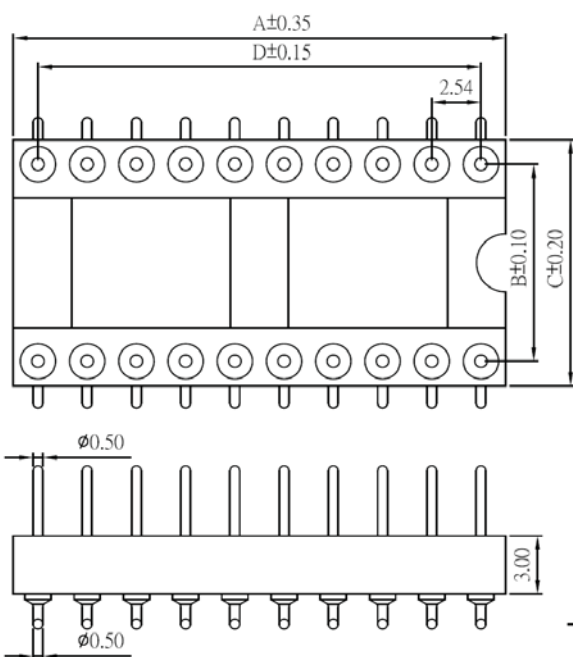

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
6	7.60	7.62	10.16	5.08	12.30	20	25.40	10.16	12.60	22.86	15.62
8	10.10	7.62	10.16	7.62	12.30	22	27.94	10.16	12.60	25.40	15.62
10	12.60	7.62	10.16	10.16	12.30	24	30.48	10.16	12.60	27.94	15.62
14	17.70	7.62	10.16	15.24	12.30	28	35.56	10.16	12.60	33.02	15.62
16	20.30	7.62	10.16	17.78	12.30	32	40.64	10.16	12.60	38.10	15.62
18	22.80	7.62	10.16	20.32	12.30						
20	25.30	7.62	10.16	22.86	12.30						
22	27.94	7.62	10.16	25.40	12.30						
24	30.48	7.62	10.16	27.94	12.30						
28	35.56	7.62	10.16	33.02	12.30						
No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
24	30.48	15.24	17.70	27.94	19.92	40	50.80	15.24	17.70	48.26	19.92
26	35.56	15.24	17.70	33.02	19.92	42	53.30	15.24	17.70	50.80	19.92
32	40.64	15.24	17.70	38.10	19.92	48	60.96	15.24	17.70	58.42	19.92
36	45.70	15.24	17.70	43.18	19.92						
40	50.80	15.24	17.70	48.26	19.92						
42	53.30	15.24	17.70	50.80	19.92						
48	60.96	15.24	17.70	58.42	19.92						

Part No.:MHICM-XXX-U

ORDER INFORMATION

