






Machine Pin Socket SMT Type 2.54mm

SPECIFICATION




Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 10mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL






Insulator: Polyester, UL 94V-0
 ◎Standard: PPS
 Contact Pin: Copper Alloy
 Contact Plating: Selective Gold

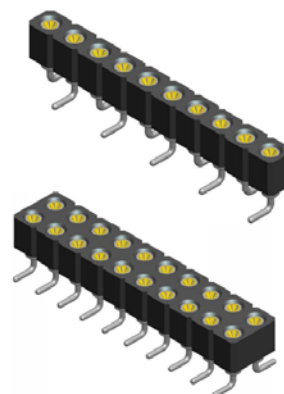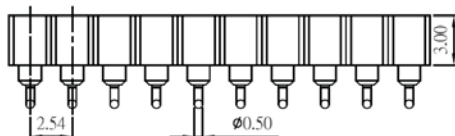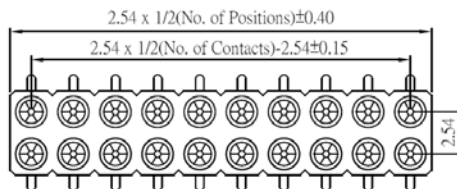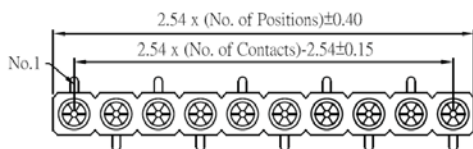

Part No.: MS1M30-1/2XX-U

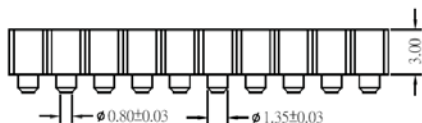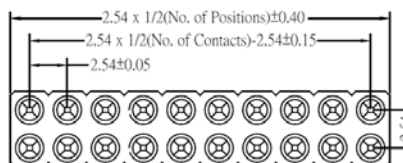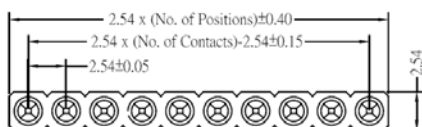

Part No.: MS1M30-1/2XX-1-U

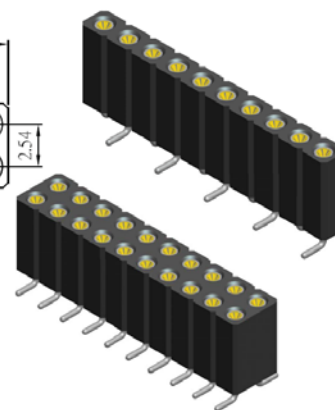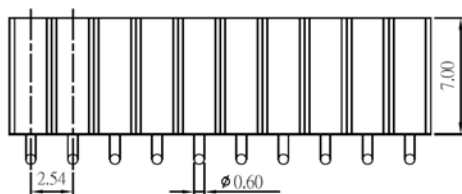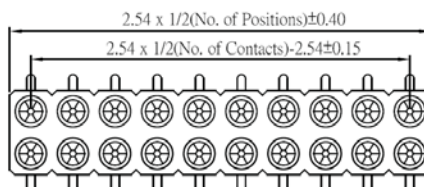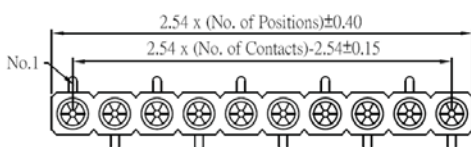

Part No.: MS1M70-1/2XX-U

ORDER INFORMATION

