



Machine Pin Socket Right Angle Type 2.54mm

SPECIFICATION


Current Rate: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 10mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL



Insulator: Polyester, UL 94V-0
©Standard: PPS
Contact Pin: Copper Alloy
Contact Plating: Selective Gold

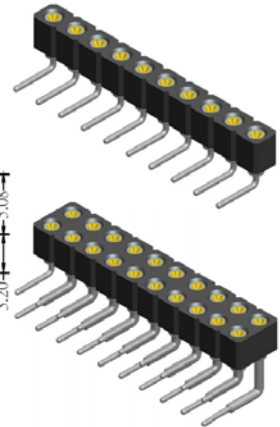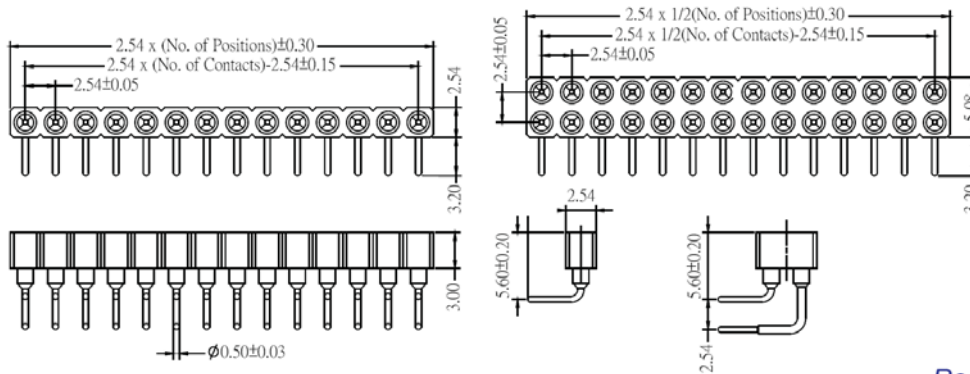

Part No.: MS1R30-1/2XX-U

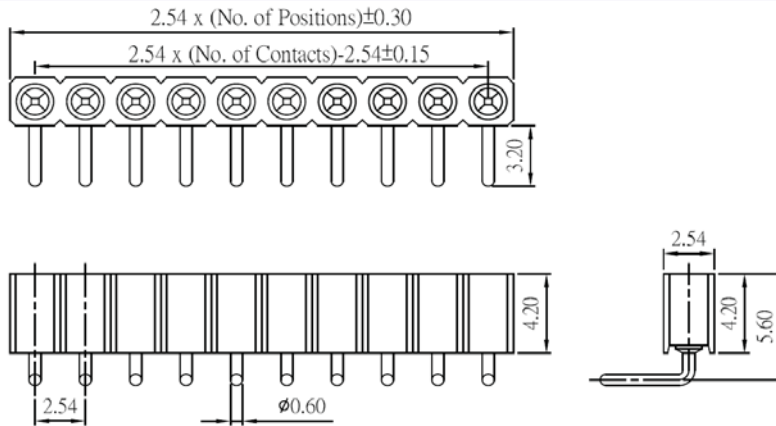

Part No.: MS1R42-1XX-U

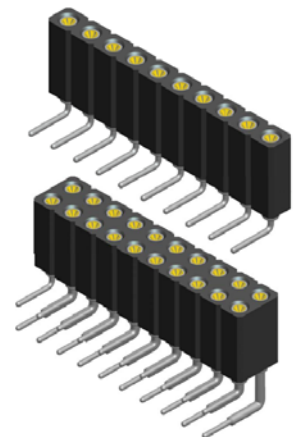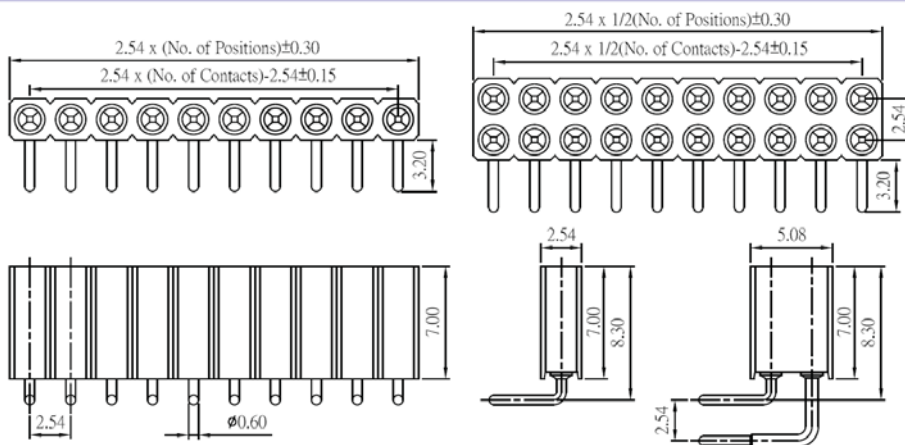

Part No.: MS1R70-1/2XX-U

ORDER INFORMATION

M	S	1	R	X	X	-	X	X	X	B	-	U
30: Insulator Height H=3.0mm 42: Insulator Height H=4.2mm 70: Insulator Height H=7.0mm			1: Single Row 2: Dual Row		No. of Contacts (02-40)		S: Selective ☆: Remark Finger: Gold Plated Sleeve: Tin Plated		©B: Black Insulator		U: RoHS + PPS	