

Pin Header 2.54mm Straight / Stack Straight / Kinked / Press Fit Type


Specifications

Current Rate: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C





Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

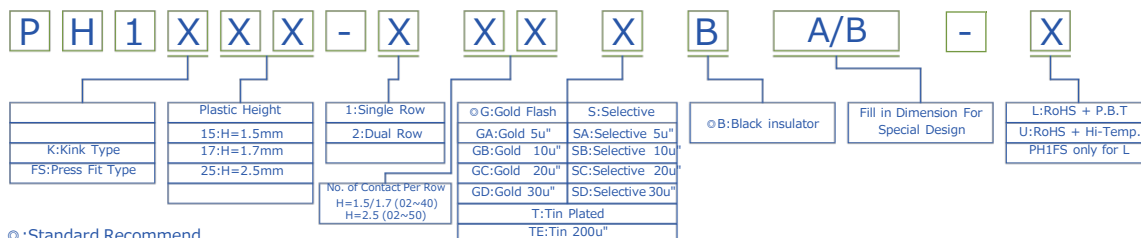





Pin Header 2.54mm 1 & 2 Row H=1.5/2.5mm Kinked Type

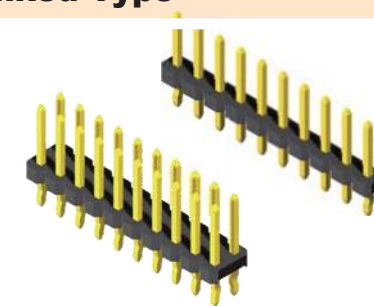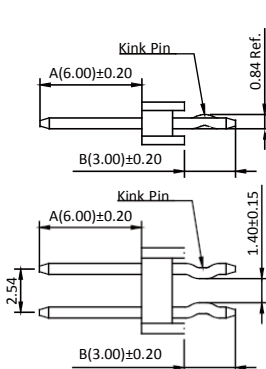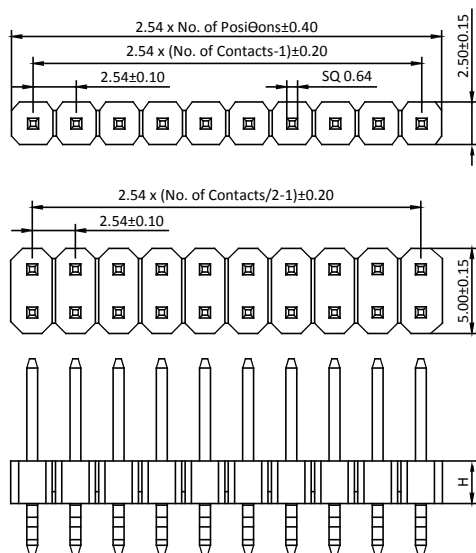

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.: PH1K15/25-1/2XX-L/U

Pin Header 2.54mm 1 & 2 Row H=2.5mm Press Fit Type

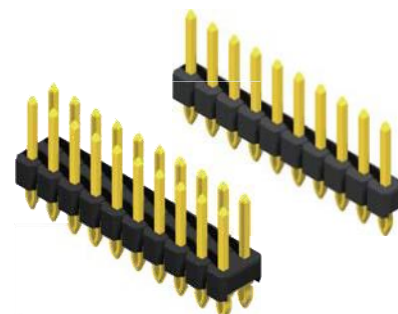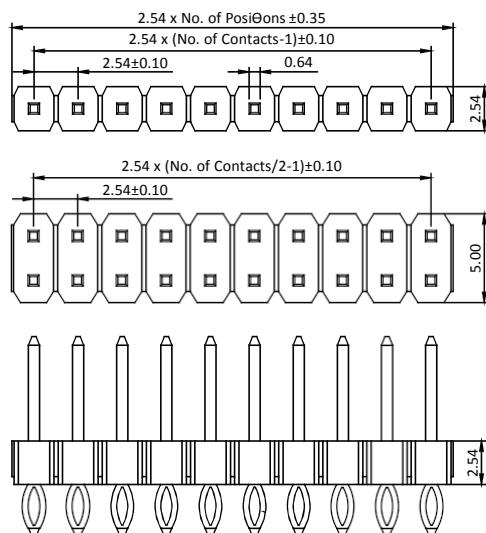

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.: PH1FS25-1/2XX-L

Pin Header 2.54mm