TOPTEK®
HARDWARE ELECTRONIC COMPONENTS
www.toptek-co.com

RoHS 2002/95/EC

Pin Header 2.54mm Right Angle / Stack Right Angle Type

Specifications
Current Rate:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material
Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

P H 1 X X X - X □ □ X B A/B/C/L1 - X

	Plastic Height	1:Single Row	◎G:Gold Flash	S:Selective	◎B:Black insulator	Fill in Dimension For Special Design	L:RoHS + P.B.T
	15:H=1.5mm	2:Dual Row	GA:Gold 5u"	SA:Selective 5u"		(A/B/C/D for PH1DR only)	U:RoHS + Hi-Temp.
	17:H=1.7mm		GB:Gold 10u"	SB:Selective 10u"			(H=1.5/1.7mm for U only)
RDD:Stack R/A Type	25:H=2.5mm		GC:Gold 20u"	SC:Selective 20u"			
			GD:Gold 30u"	SD:Selective 30u"			
			T:Tin Plated				
			TE:Tin 200u"				

◎:Standard Recommend

Pin Header 2.54mm

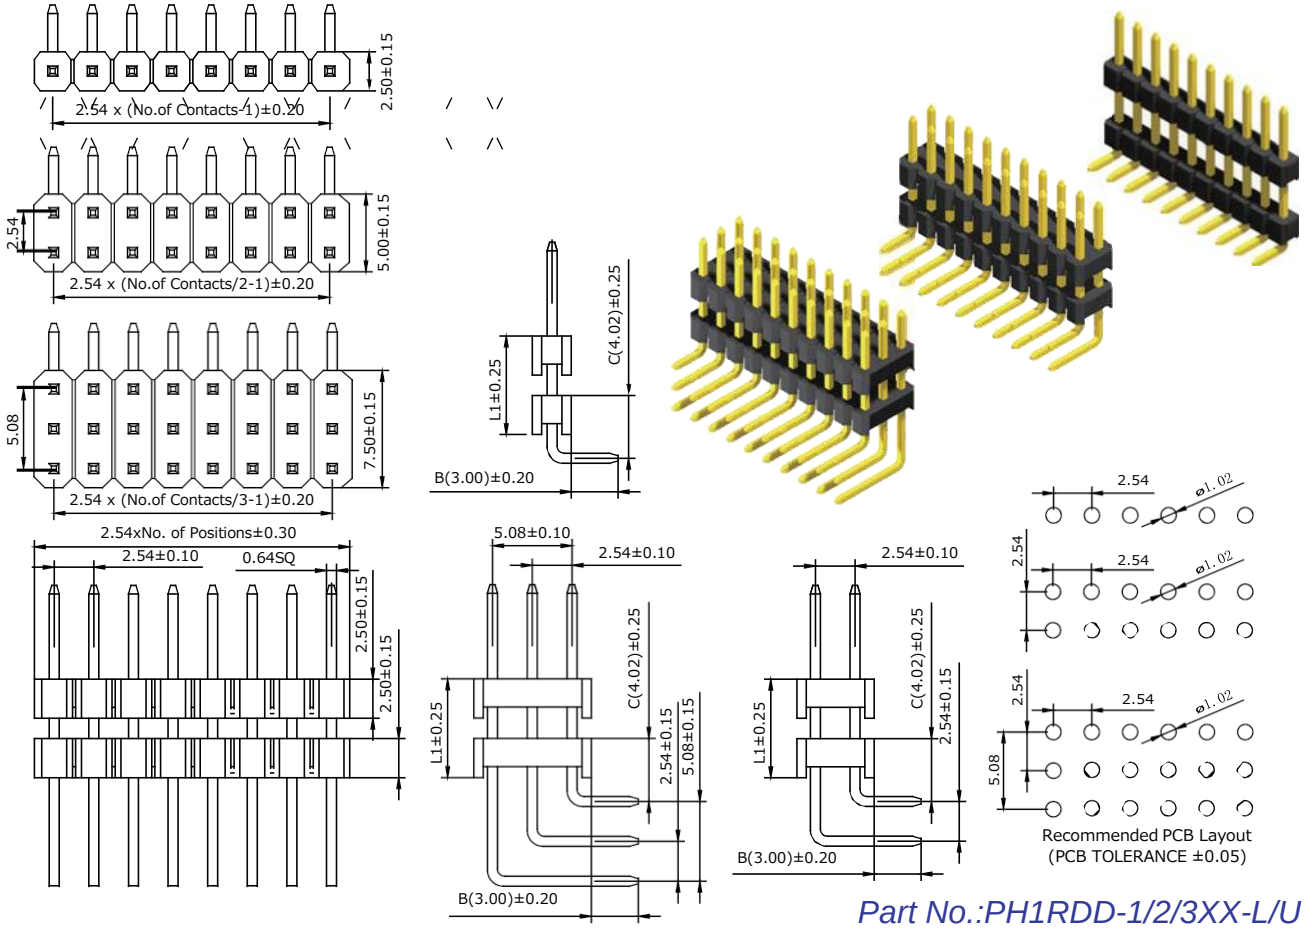

Part No.:PH1RDD-1/2/3XX-L/U