

Pin Header 2.54mm SMT / Stack SMT / SMT R/A / Mixed Technology Pin Type


Specifications

Current Rate: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

Material


Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

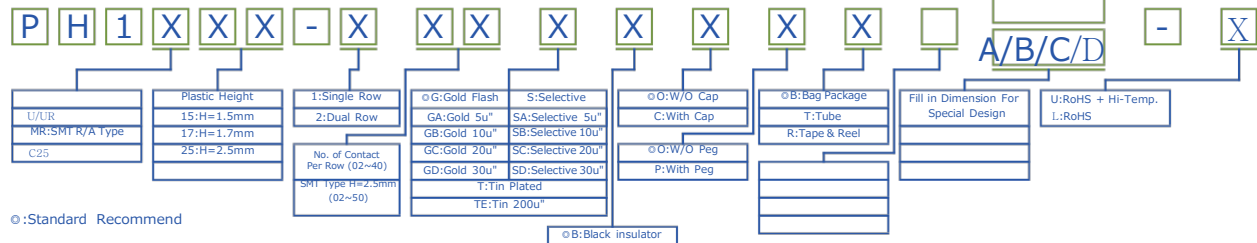

Pin Header 2.54mm

Pin Header 2.54mm 1 & 2 Row H=2.5mm C Type

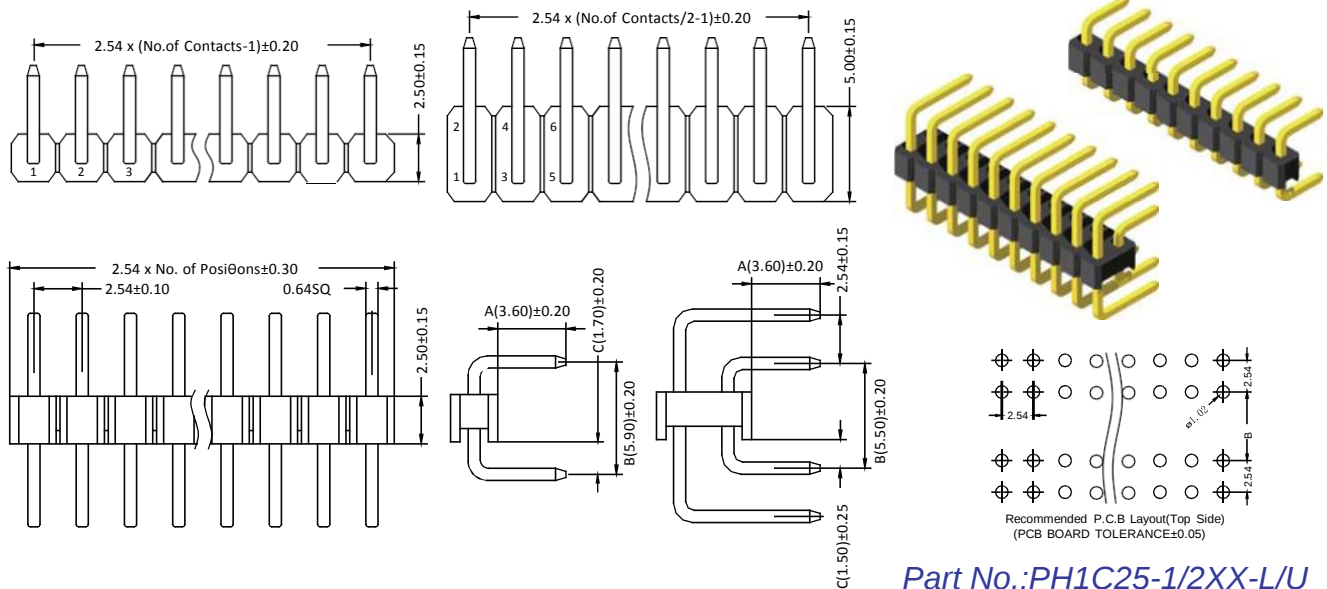

Pin Header 2.54mm 1 Row H=2.5mm U Type

