

Pin Header 2.54mm Straight / Stack Straight / Kinked / Press Fit Type


Specifications

Current Rate: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C





Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION


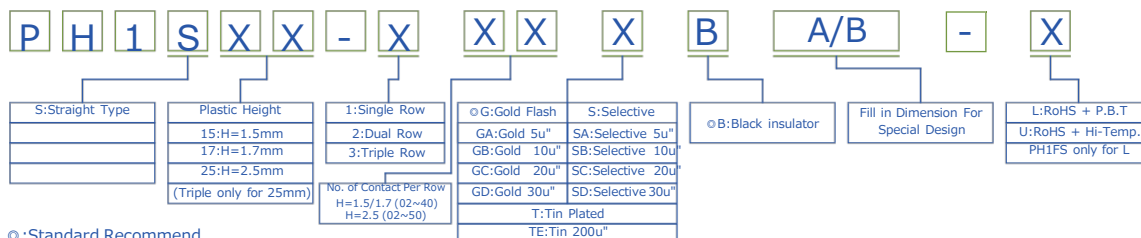


Pin Header 2.54mm 1 & 2 & 3 Row H=1.5/1.7/2.5mm Straight Type

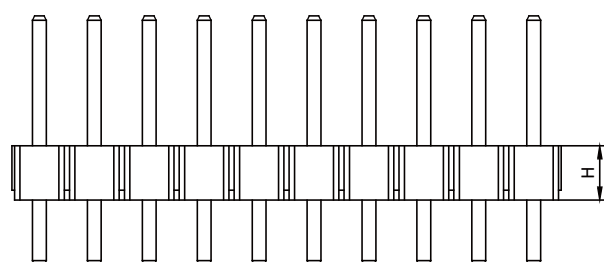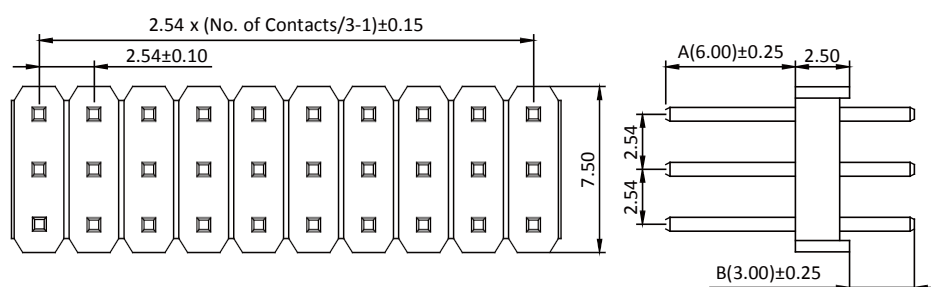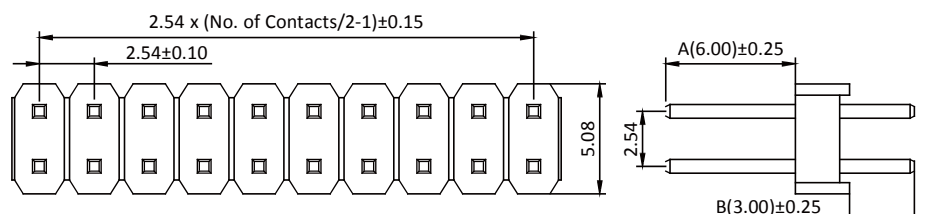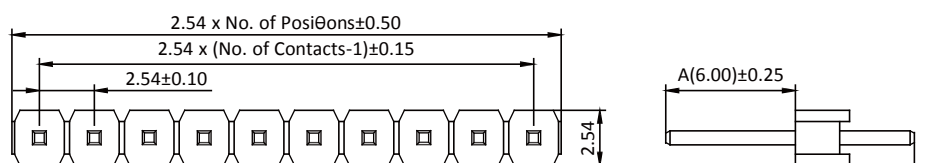


©: Standard Dimensions

Total length	Dim.A	Dim.B
11.60	6.00	3.00
13.90	8.10	3.30



Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Part No.: PH1S15/17/25-1/2/3XX-L/U

Pin Header 2.54mm