

Pin Header 2.0mm Stack R/A / Straight / Stack Straight / R/A Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material




Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

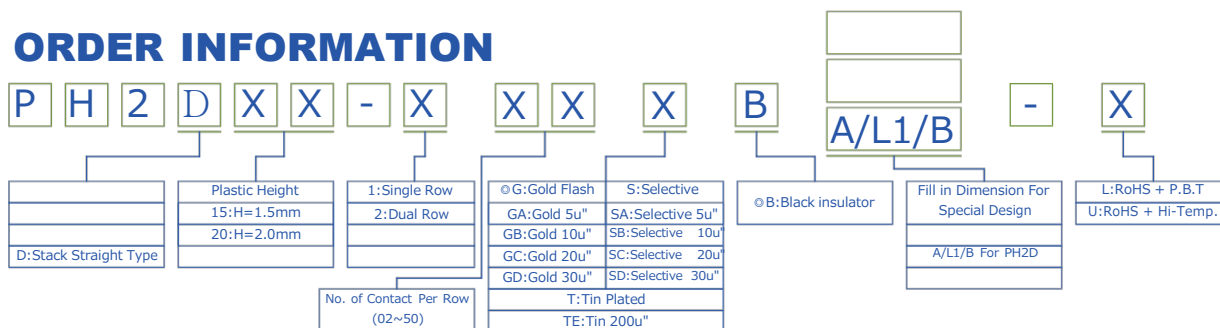


⊙: Standard Recommend

Pin Header 2.0mm 1 & 2 Row H=1.5/2.0mm Stack Straight Type

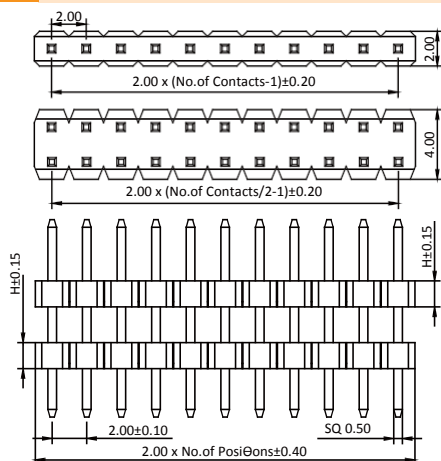

Part No.: PH2D15/20-1/2XX-L/U

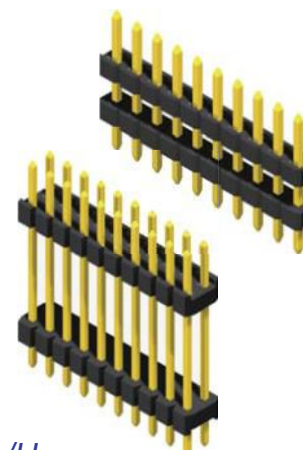

Pin Header 2.0mm