

Pin Header 2.0mm SMT / Stack SMT / R/A / SMT R/A Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

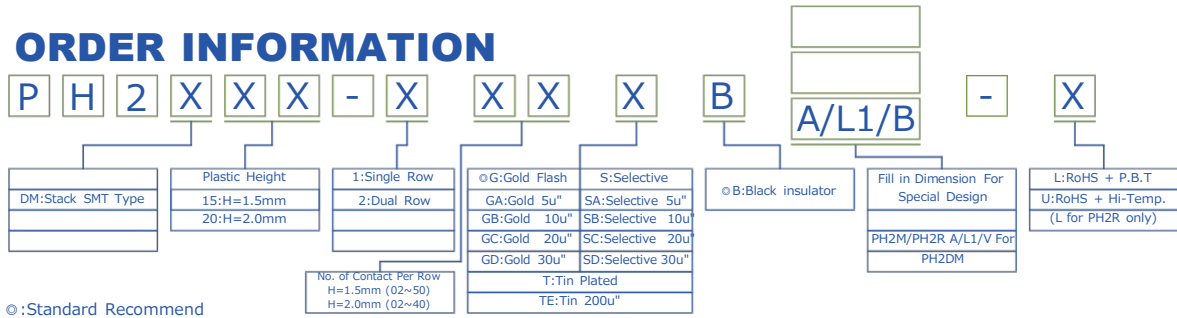


Pin Header 2.0mm 1 Row H=1.5/2.0mm SMT / Stack SMT Type

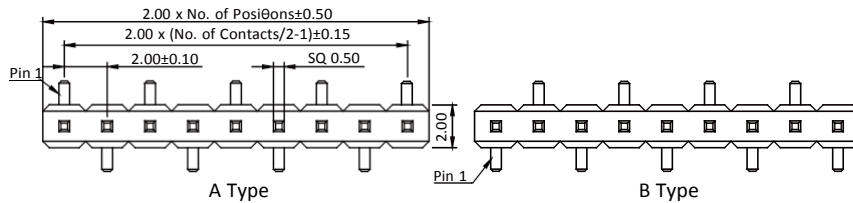


◎: Standard Dimensions
Unavailable Stack SMT Type

	Dimensions		
	A	B	C
H=1.50mm	3.00	4.20	2.20
H=2.00mm	or 4.00		

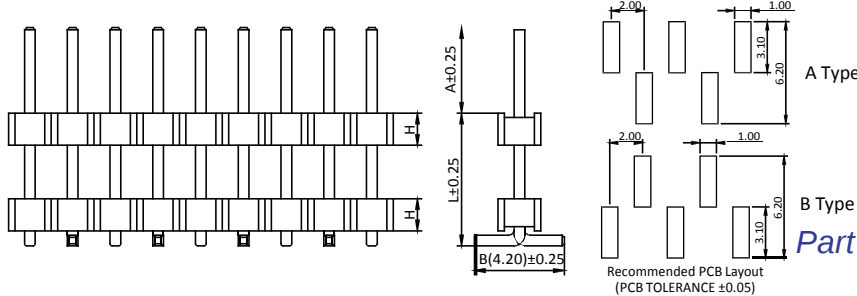


Part No.: PH2M15/20-1XX-U
PH2DM15/20-1XX-U

Pin Header 2.0mm 2 Row H=1.5/2.0mm SMT / Stack SMT Type

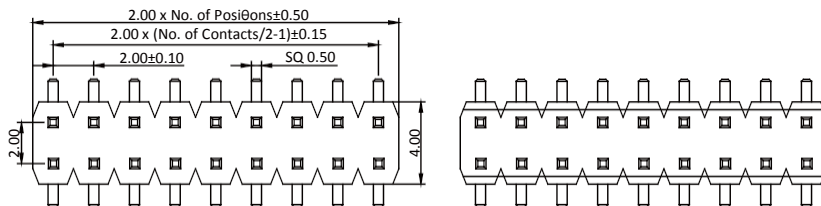

◎: Standard Dimensions
Unavailable Stack SMT Type

	Dimensions		
	A	B	C
H=1.50mm	3.00	6.20	2.70
H=2.00mm	or 4.00		

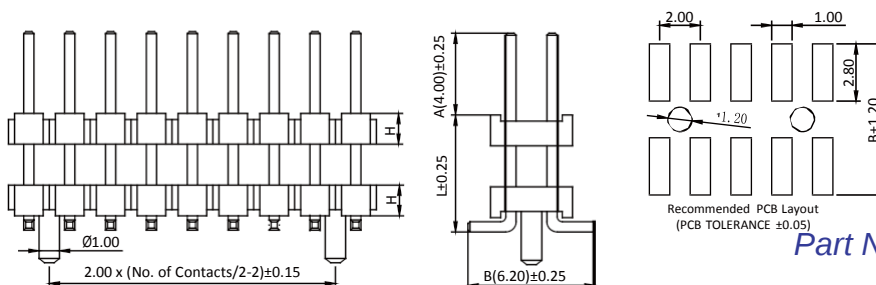

Part No.: PH2M15/20-2XX-U
PH2DM15/20-2XX-U

Pin Header 2.0mm