

## Pin Header 2.0mm SMT / Stack SMT / R/A / SMT R/A Type


### Specifications

Current Rate: 2 AMP  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance: 20mΩ Max.  
Dielectric Voltage: 500V AC for one minute  
Operation Temperature: -40°C to +105°C


### Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0  
Terminal: Copper Alloy  
Plating: Gold Plated


## ORDER INFORMATION

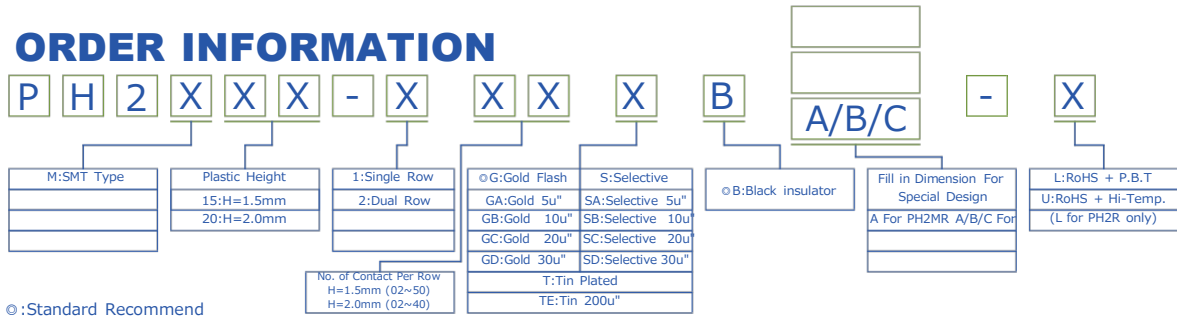

## Pin Header 2.0mm 1 Row H=1.5/2.0mm SMT / Stack SMT Type

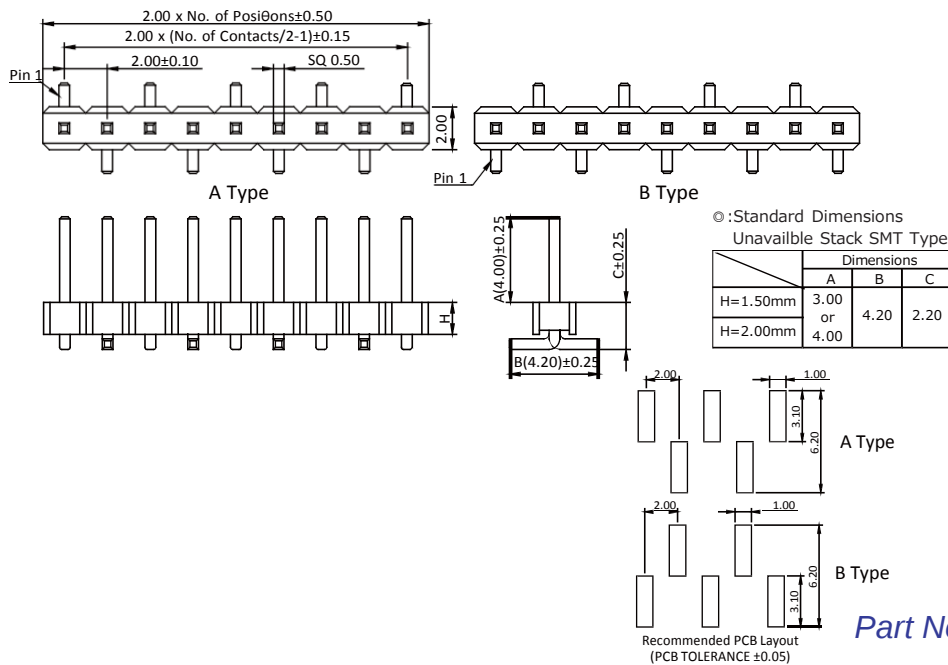

## Pin Header 2.0mm 2 Row H=1.5/2.0mm SMT / Stack SMT Type

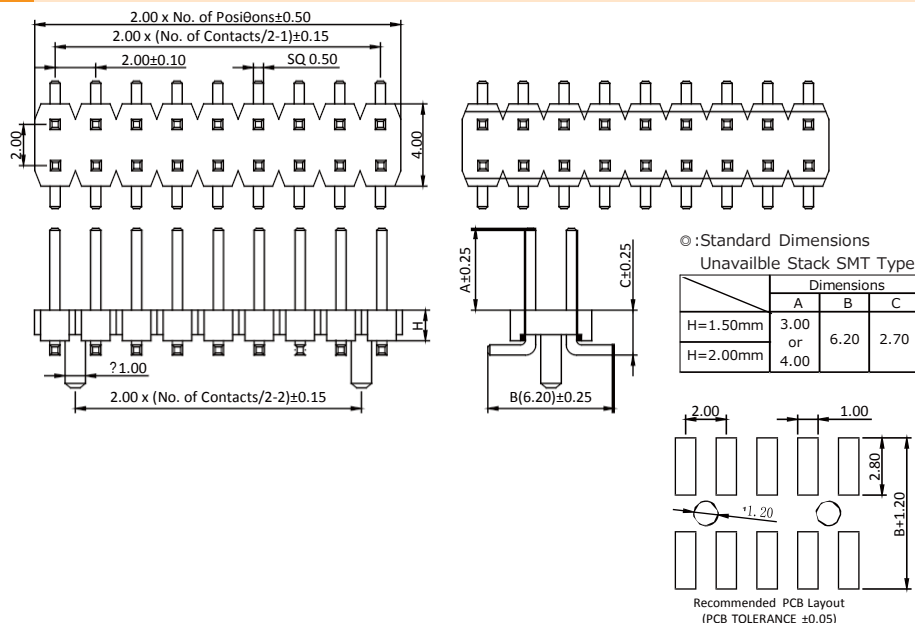

Pin Header 2.0mm