

Pin Header 2.0mm SMT / Stack SMT / R/A / SMT R/A Type


Specifications

Current Rate:2 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material




Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

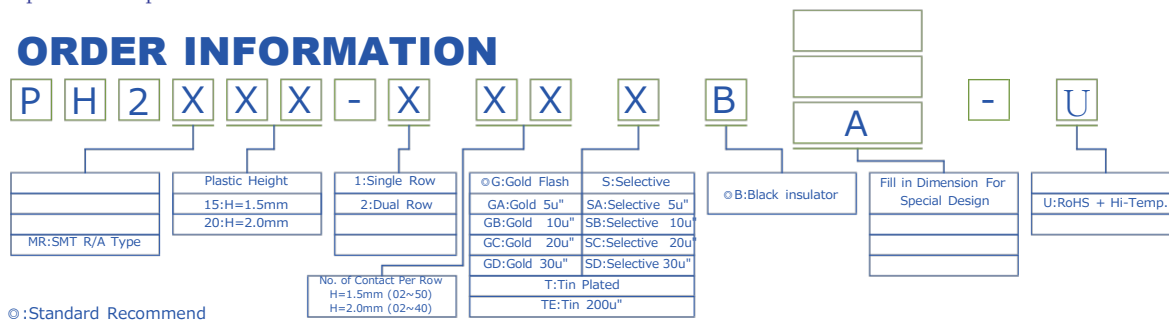

© :Standard Recommend

Pin Header 2.0mm 1 & 2 Row H=1.5/2.0mm SMT R/A Type

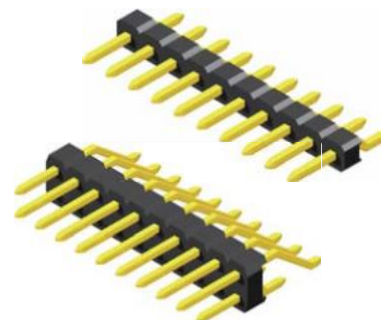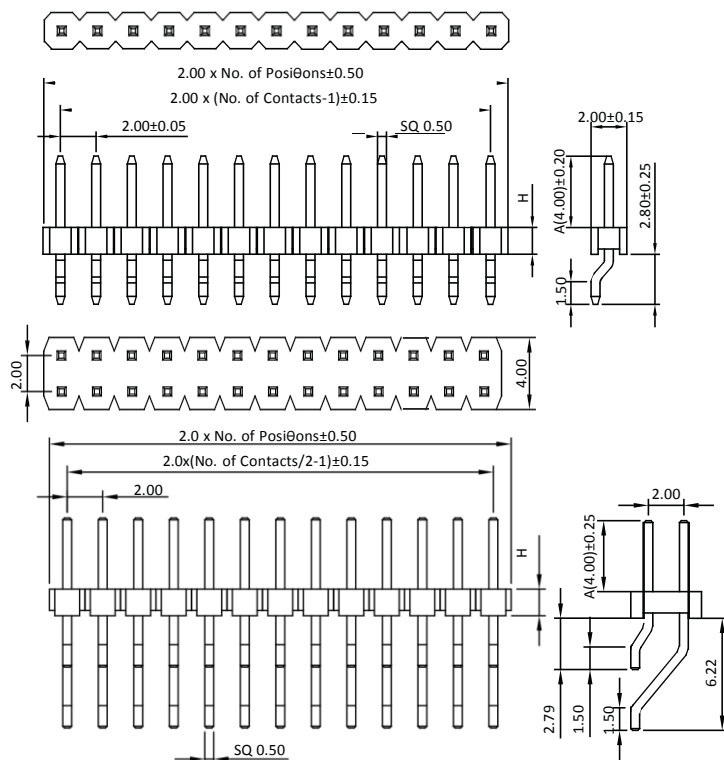

Part No.:PH2MR15/20-1/2XX-U

Pin Header 2.0mm