

Pin Header 2.0mm SMT / Stack SMT / R/A / SMT R/A Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material



Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

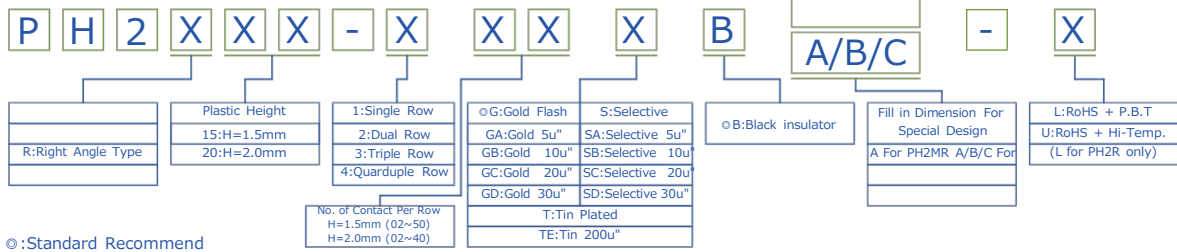



Pin Header 2.0mm

Pin Header 1.27mm 1 & 2 & 3 & 4 Row H=1.5/2.0mm Right Angle Type

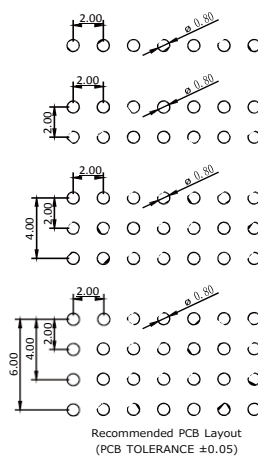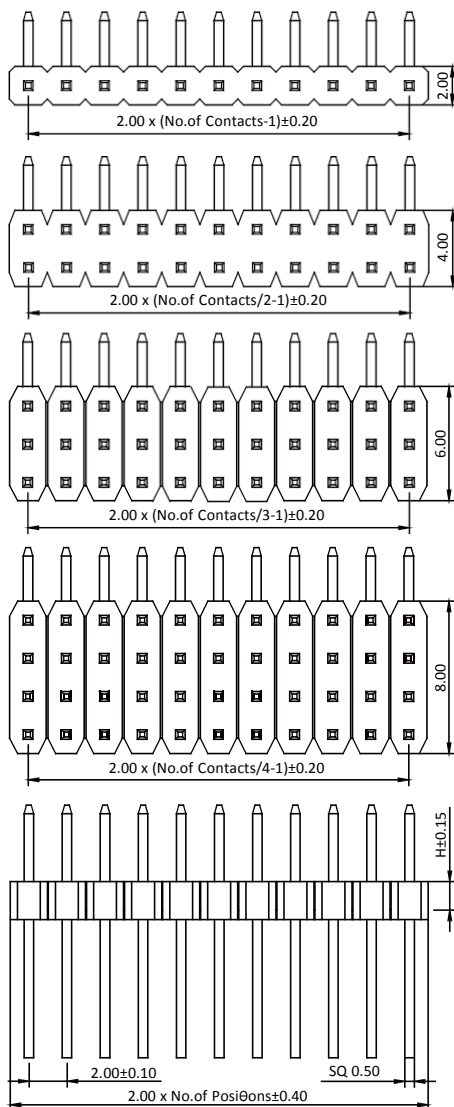

Standard Dimensions

	Dimensions		
	A	B	C
H=1.50mm	3.90	2.80	2.50
H=2.00mm	3.90	2.80	3.00

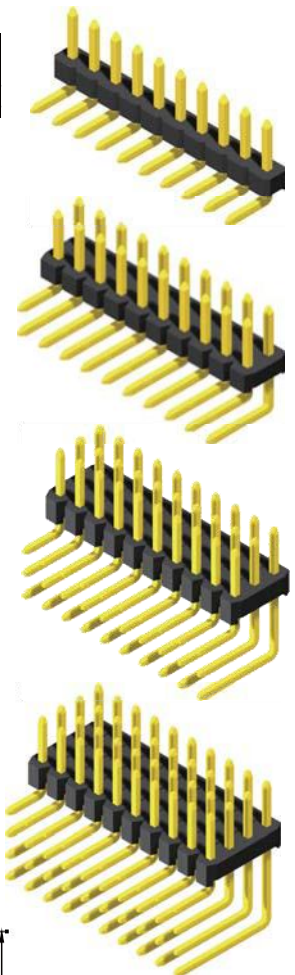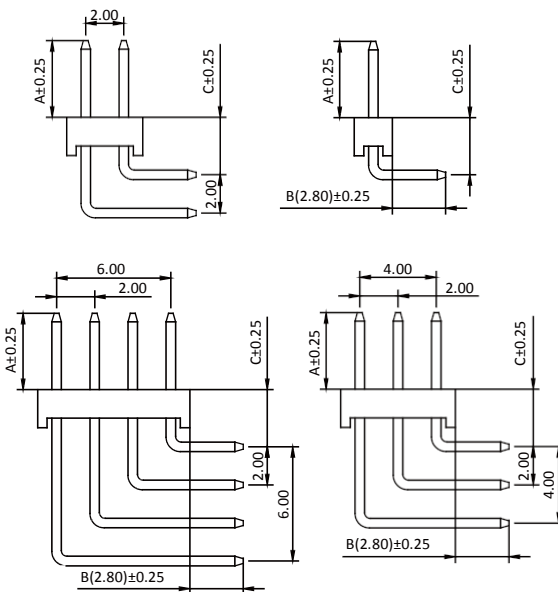

Part No.: PH2R15/20-1/2/3/4XX-L/U