

Pin Header 2.0mm Stack R/A / Straight / Stack Straight / R/A Type


Specifications

Current Rate:2 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material






Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

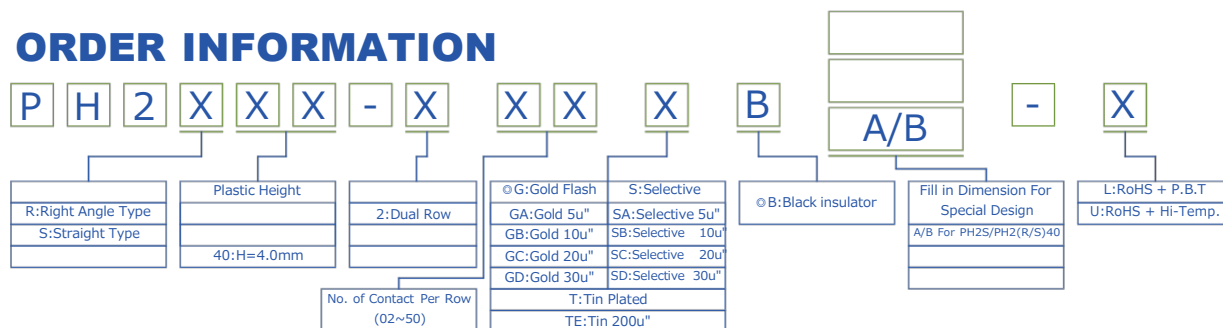

© :Standard Recommend

Pin Header 2.0mm 2 Row H=4.0mm Right Angle / Straight Type

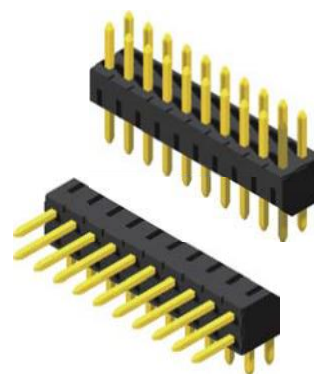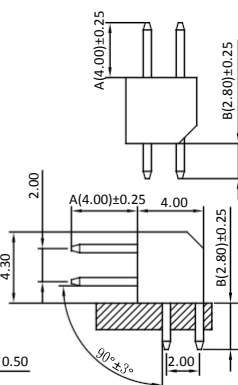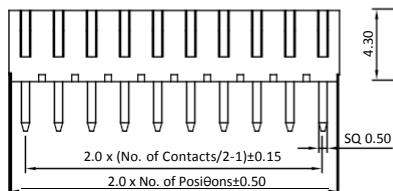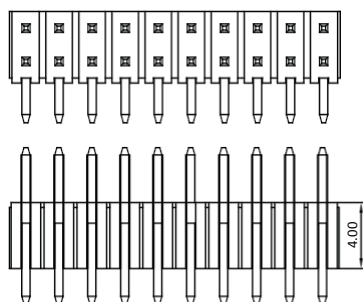

Part No.:PH2R/S40-2XX-L/U

P in Header 2.0mm