

## Pin Header 2.0mm Stack R/A / Straight / Stack Straight / R/A Type


### Specifications

Current Rate: 2 AMP  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance: 20mΩ Max.  
Dielectric Voltage: 500V AC for one minute  
Operation Temperature: -40°C to +105°C

### Material






Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0  
Terminal: Copper Alloy  
Plating: Gold Plated

## ORDER INFORMATION






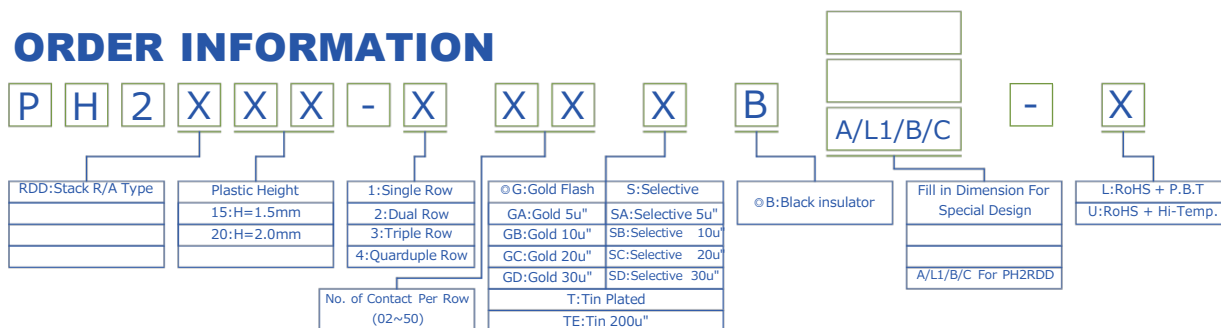


◎: Standard Recommend

## Pin Header 2.0mm 1 & 2 & 3 & 4 Row H=2.0mm Stack Right Angle Type

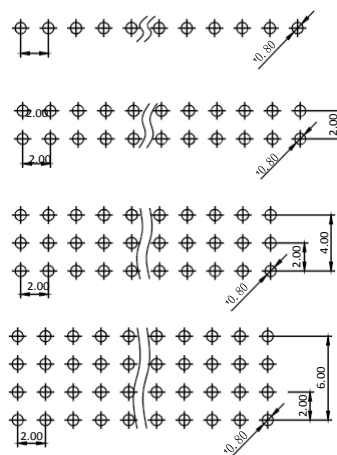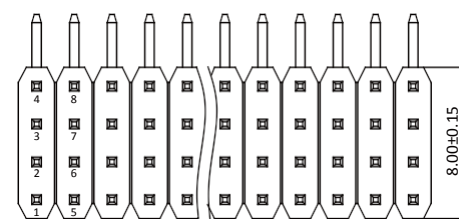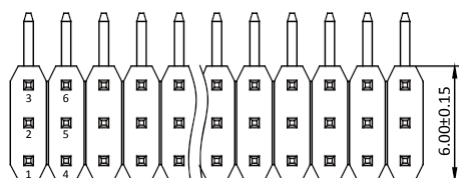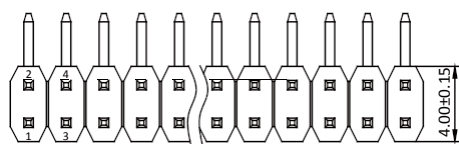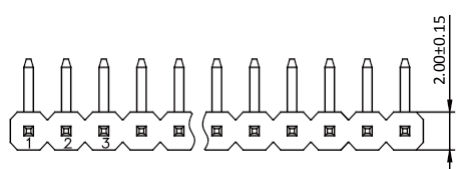

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE ±0.05)

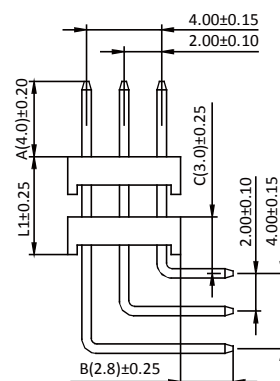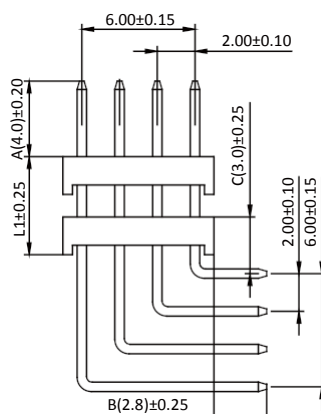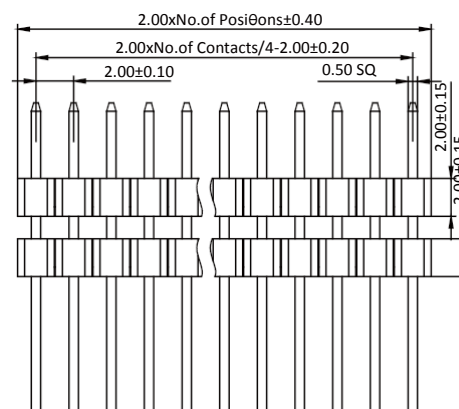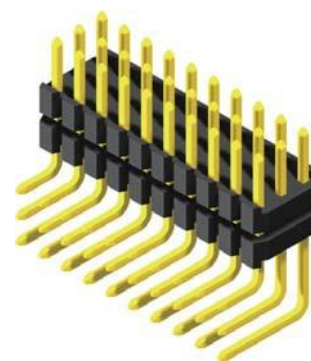

Part No.: PH2RDD-1/2/3/4XX-L/U

Pin Header 2.0mm