

Pin Header 2.0mm Stack R/A / Straight / Stack Straight / R/A Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material


Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

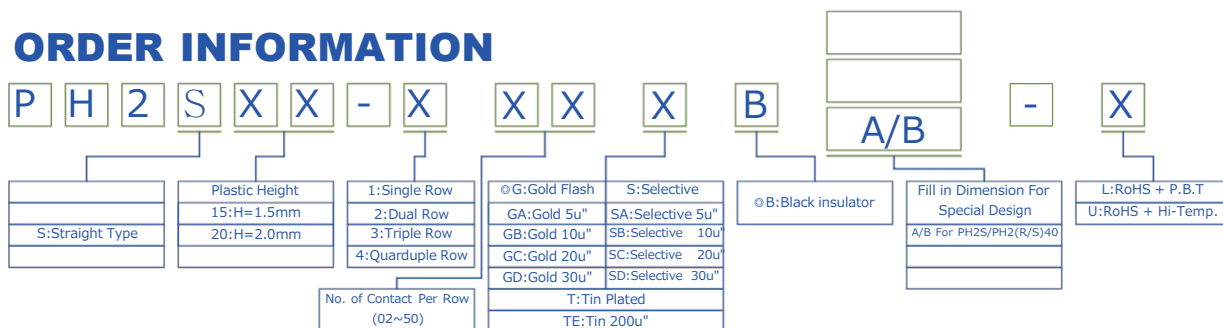

⊙: Standard Recommend

Pin Header 2.0mm 1 & 2 & 3 & 4 Row H=1.5/2.0mm Straight Type

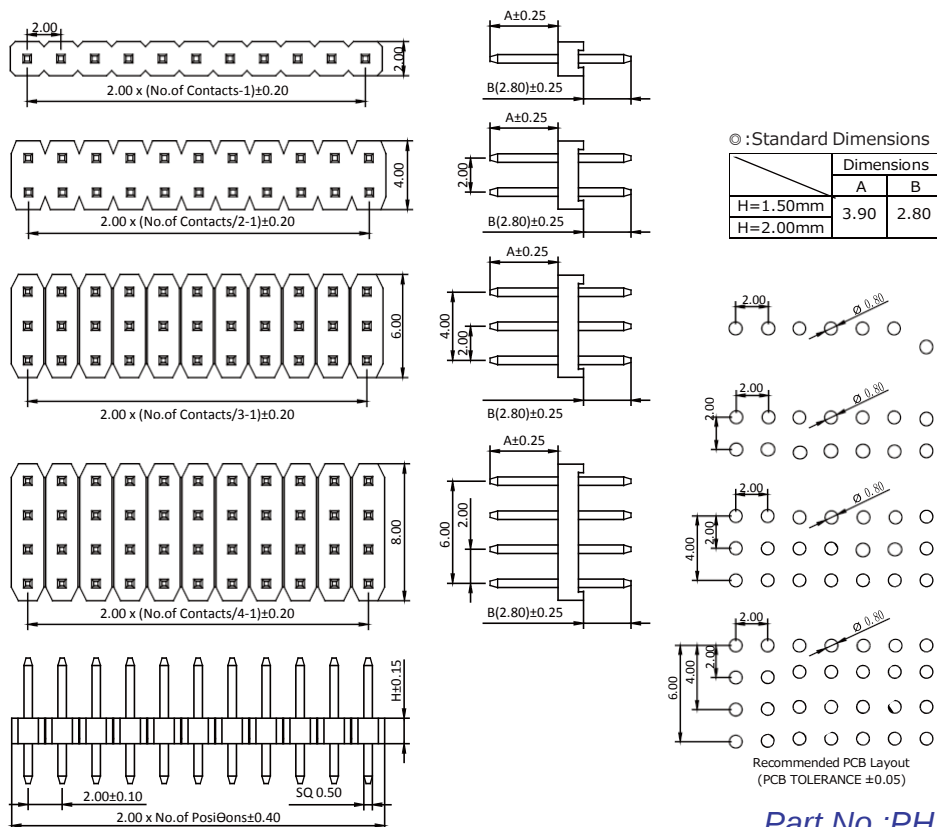

Part No.: PH2S15/20-1/2/3/4XX-L/U

Pin Header 2.0mm