

Pin Header 3.96mm SMT / Stack SMT / Right Angle / Straight / Stack Straight Type


Specifications

Current Rate: 7 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

Material


Insulator: Polyester, UL 94V-0
Standard: LCP
Terminal: Copper Alloy
Plating: Tin Plated

ORDER INFORMATION

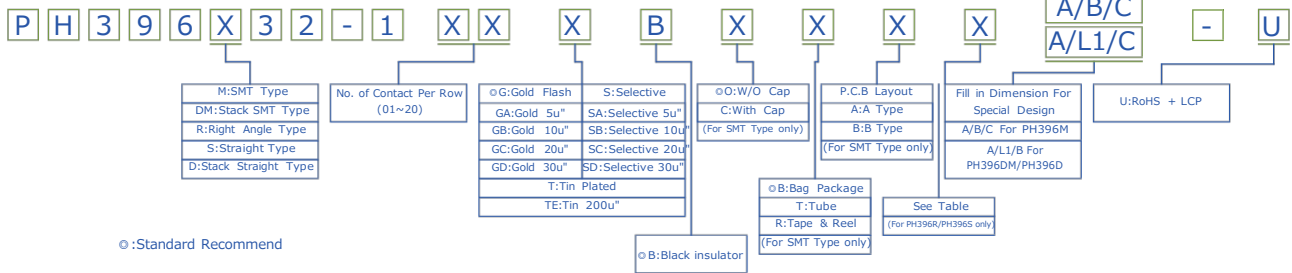


©: Standard Recommend






Pin Header 3.96mm 1 Row H=3.2mm SMT / Stack SMT Type

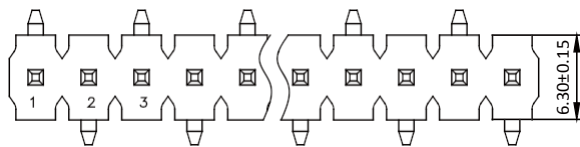


A TYPE

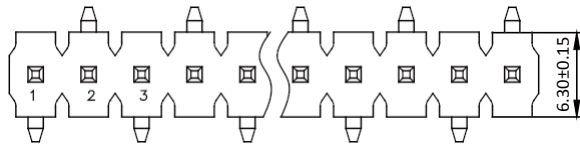

B TYPE

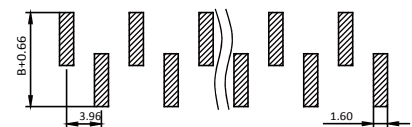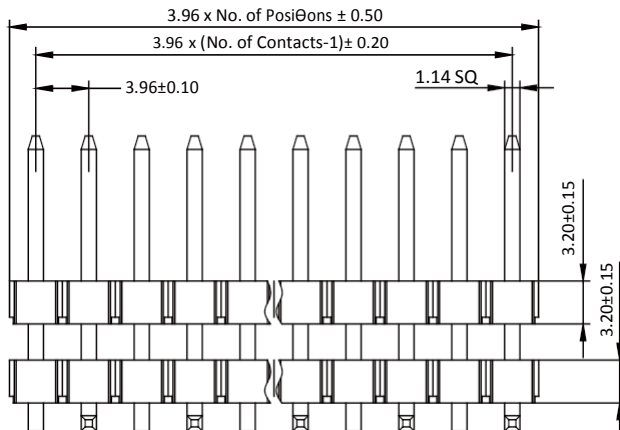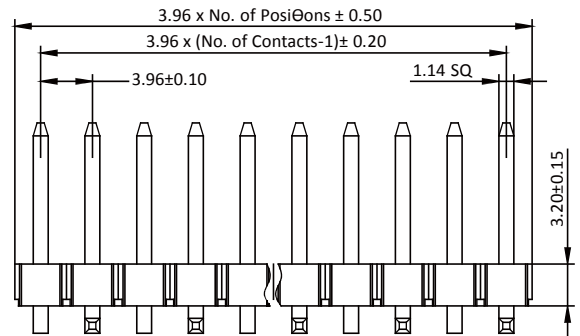

A TYPE

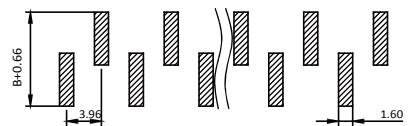

B TYPE

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Part No.: PS396M32-1XX-U
PS396DM32-1XX-U