

Pin Header 1.27mm SMT / Stack SMT / R/A / Straight / Stack Straight Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C





Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

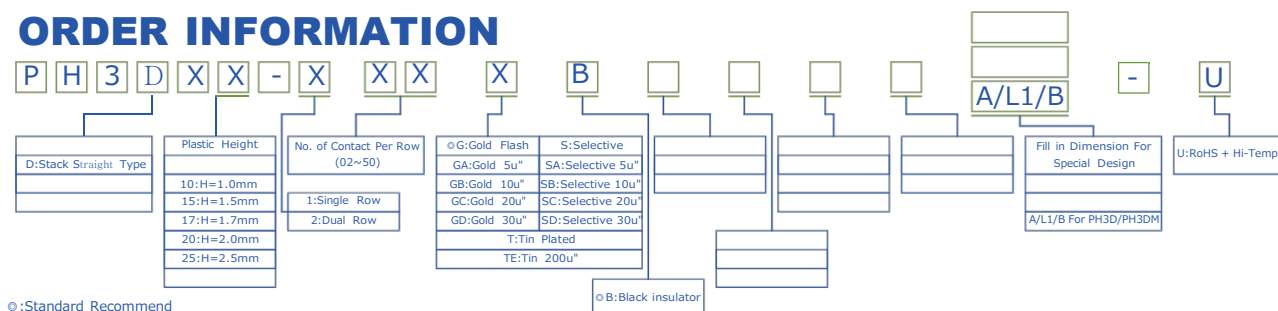

Pin Header 1.27mm 1 Row H=1.0/1.5/1.7/2.0/2.5mm Stack Straight Type

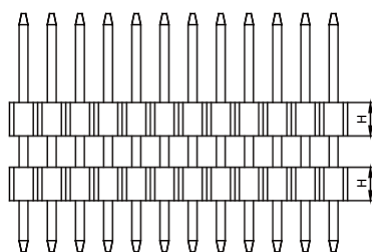

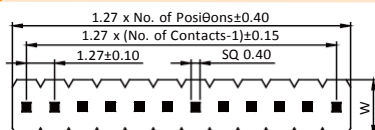


	Dimensions		
	W	A	B
H=1.00mm	2.00	3.00 or 4.00	2.30
H=1.50mm			
H=1.70mm	2.50		
H=2.00mm			
H=2.50mm			





PH3D10/15/17/20/25-1XX-U

Pin Header 1.27mm 2 Row H=0.85/1.0/1.5/1.7/2.0/2.5mm Stack Straight Type

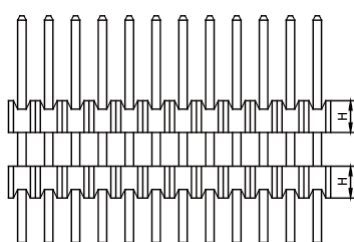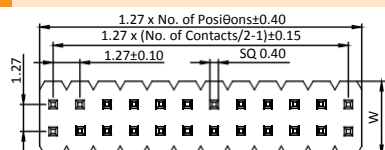

Standard Dimensions
0.85mm For PH3S only

	Dimensions		
	W	A	B
H=0.85mm	3.40	3.00 or 4.00	2.30
H=1.00mm			
H=1.50mm			
H=1.70mm			
H=2.00mm	3.00		
H=2.50mm			

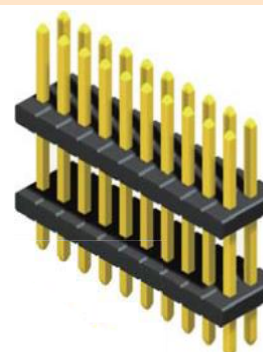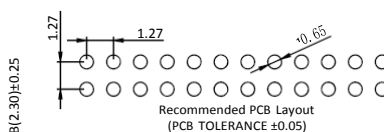

PH3D10/15/17/20/25-2XX-U

Pin Header 1.27mm