

Pin Header 1.27mm SMT / Stack SMT / R/A / Straight / Stack Straight Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C



Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION


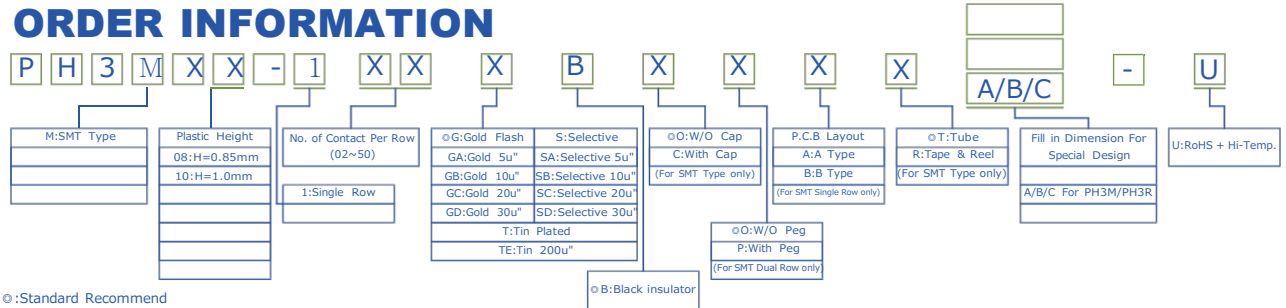


Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=1.0/1.5/2.0/2.5mm SMT / Stack SMT Type

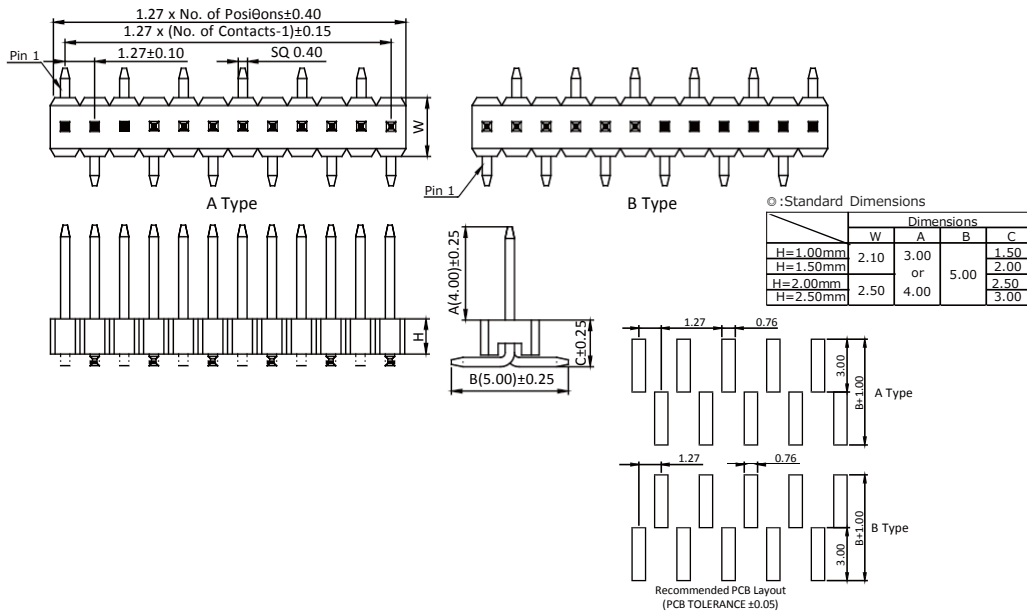

Part No.:PH3M10/15/20/25-1XX-U

Pin Header 1.27mm SQ Pin=0.4mm 2 Row H=0.85/1.0/1.5/1.7/2.0/2.5mm SMT / Stack SMT Type

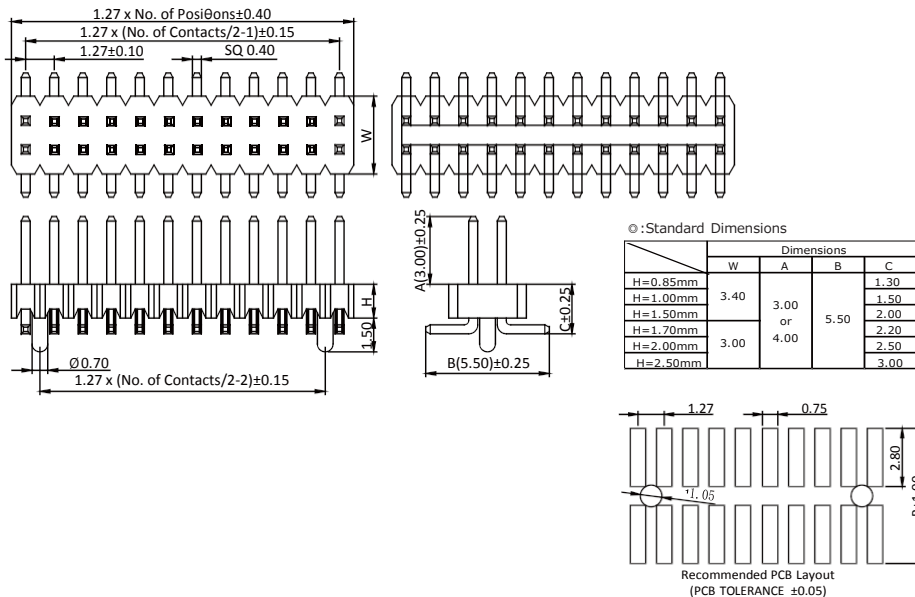

Part No.:PH3M08/10/15/17/20/25-2XX-U