



Pin Header 1.27mm SQ Pin=0.4/0.46mm H=2.5mm SMT R/A Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material


Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

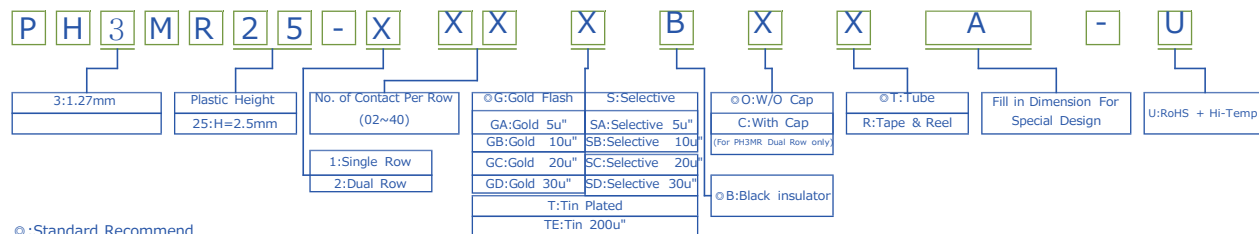

⌀:Standard Recommend

Pin Header 1.27mm SQ Pin=0.4mm 1 & 2 Row H=2.5mm SMT R/A Type

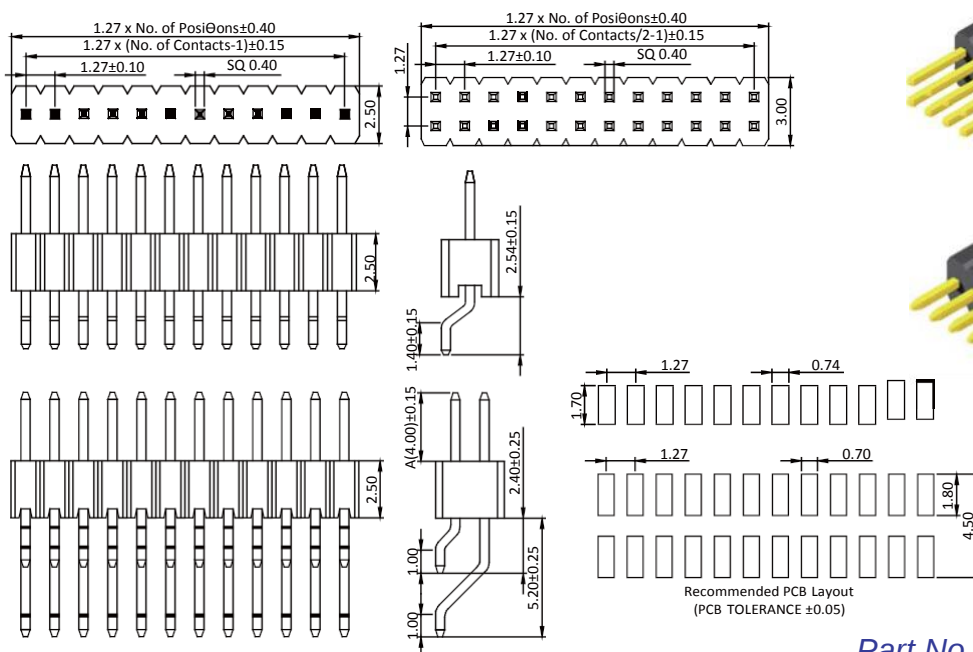

Part No.:PH3MR-1/2XX-U

Pin Header 1.27mm