

Pin Header 1.27mm SQ Pin=0.46mm 1 & 2 Row R/A / Straight / Stack Straight Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

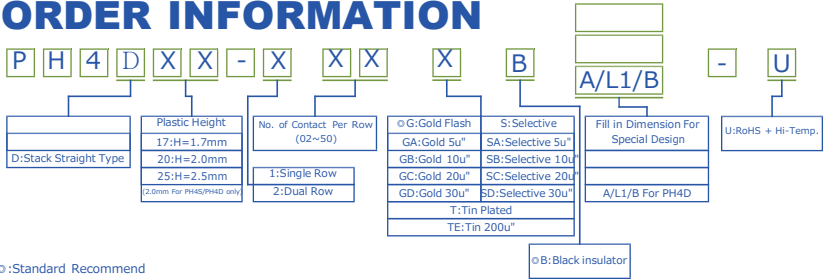





Standard Recommend

Black insulator

B(2.40)±0.25

Part No.:PH4R17/25-1/2XX-U

Pin Header 1.27mm SQ Pin=0.46mm 1 & 2 Row H=1.7/2.5mm Straight / Stack Straight Type

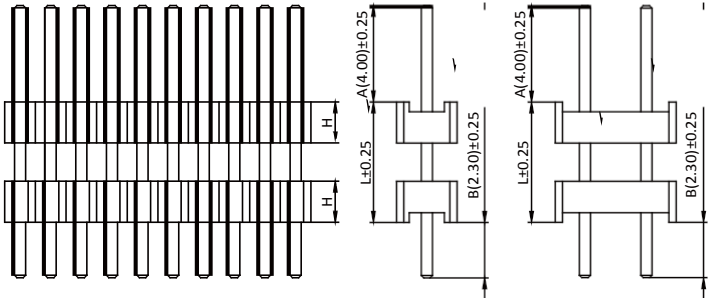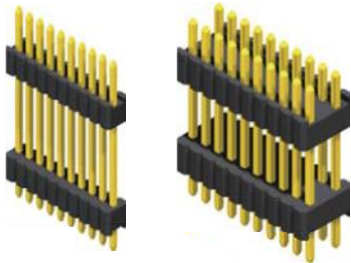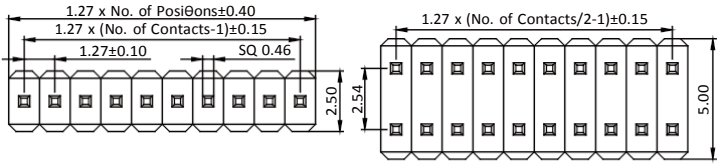

PH4D17/25-1/2XX-U

Pin Header 1.27mm