

Pin Header 1.27mm SQ Pin=0.46mm 1 & 2 Row SMT / Stack SMT Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

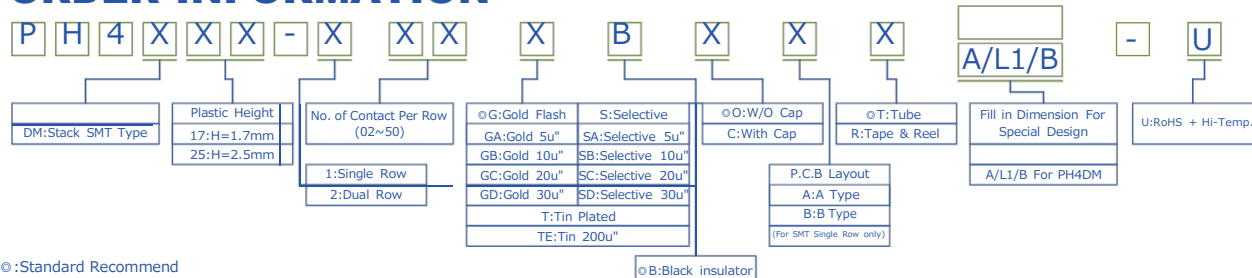


Pin Header 1.27mm SQ Pin=0.46mm 1 Row H=1.7/2.5mm SMT / Stack SMT Type

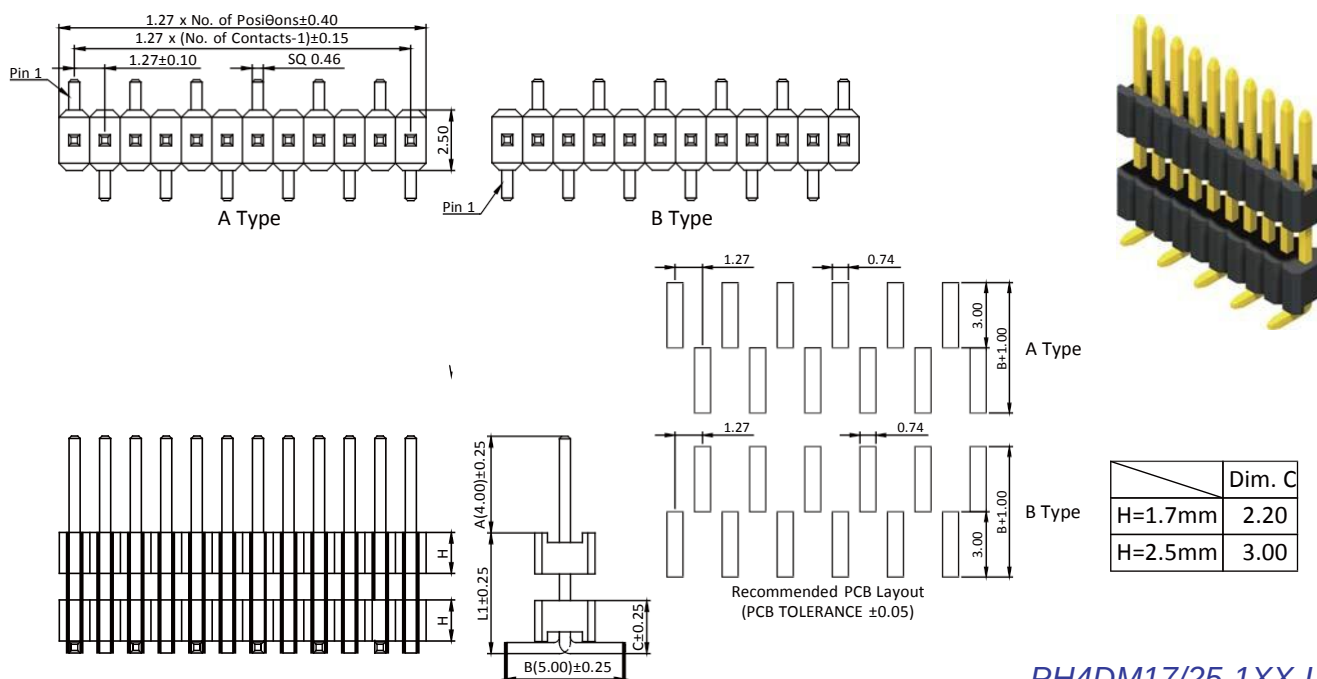

PH4DM17/25-1XX-U

Pin Header 1.27mm SQ Pin=0.46mm 2 Row H=1.7/2.5mm SMT / Stack SMT Type

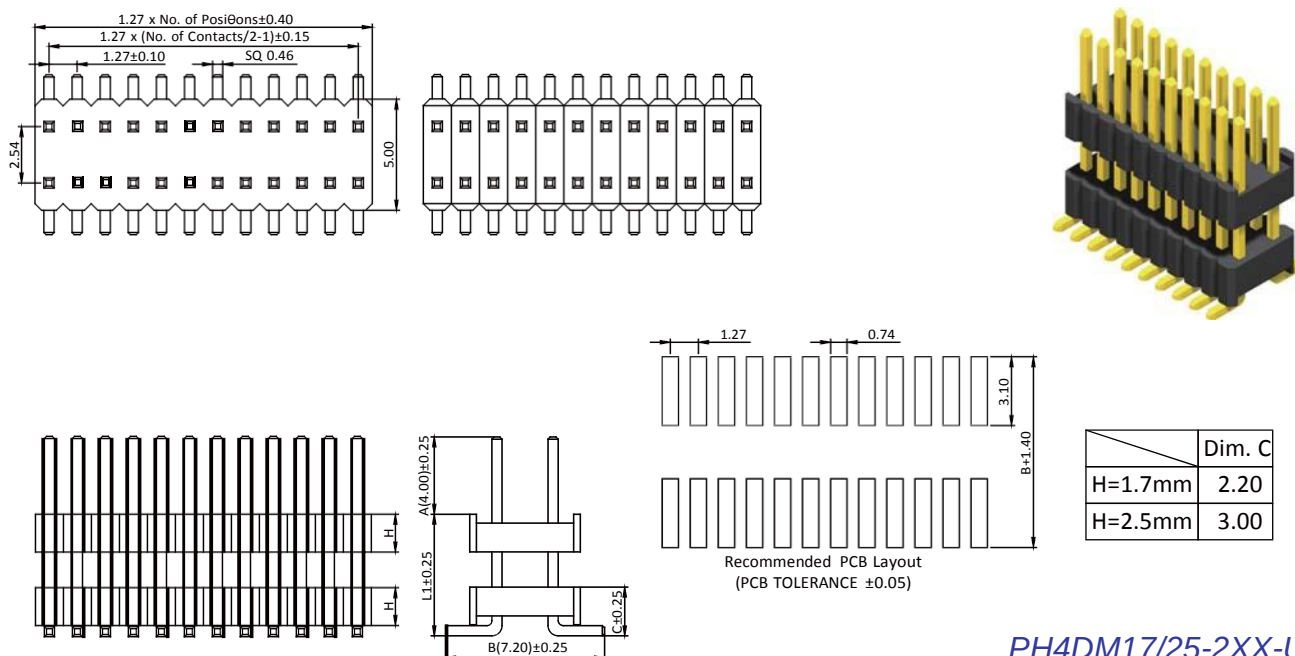

PH4DM17/25-2XX-U