

Pin Header 1.0mm SMT / Stack SMT / R/A / SMT R/A / Straight / Stack Straight Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material


Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

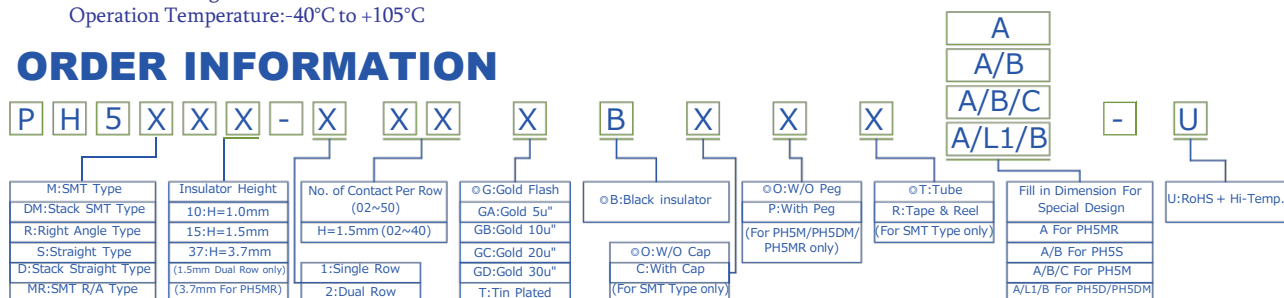


○:Standard Recommend

Pin Header 1.0mm 1 Row H=1.0/1.5mm SMT / Stack SMT Type

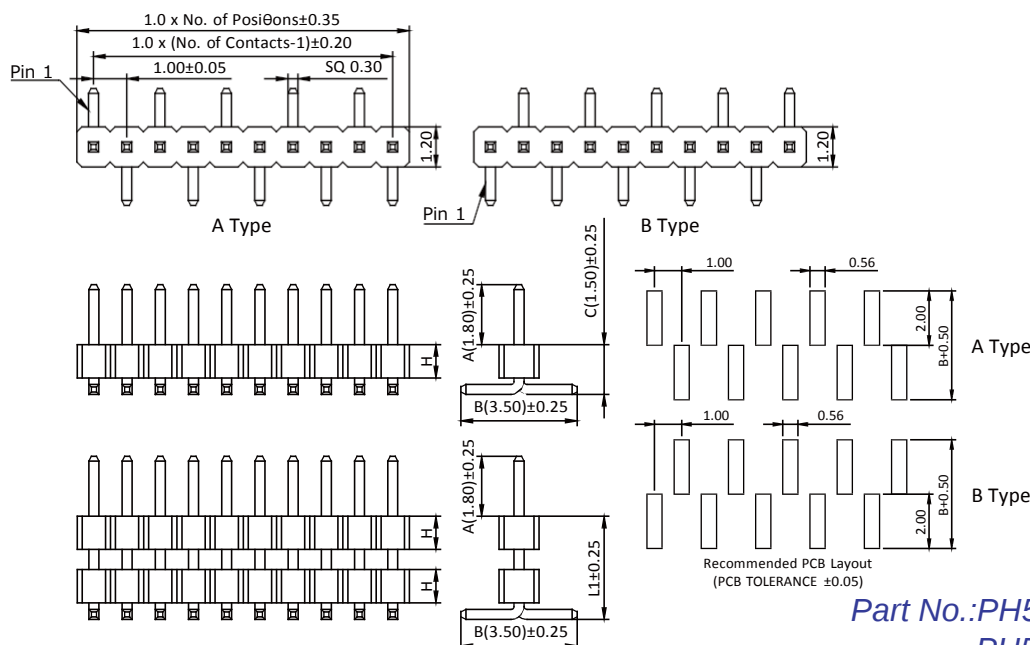

Part No.:PH5M10/15-1XX-U
PH5DM10/15-1XX-U

Pin Header 1.0mm 2 Row H=1.0/1.5mm SMT / Stack SMT Type

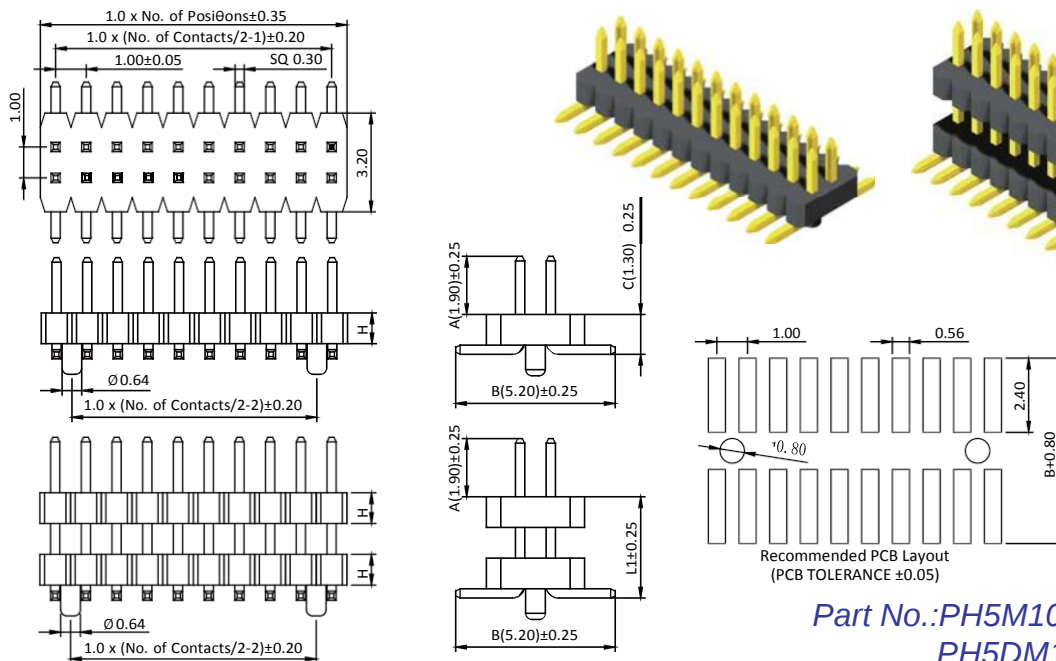

Part No.:PH5M10/15-2XX-U
PH5DM10/15-2XX-U

