

Pin Header 0.8mm SMT / Stack SMT / SMT R/A / Straight / Stack Straight Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

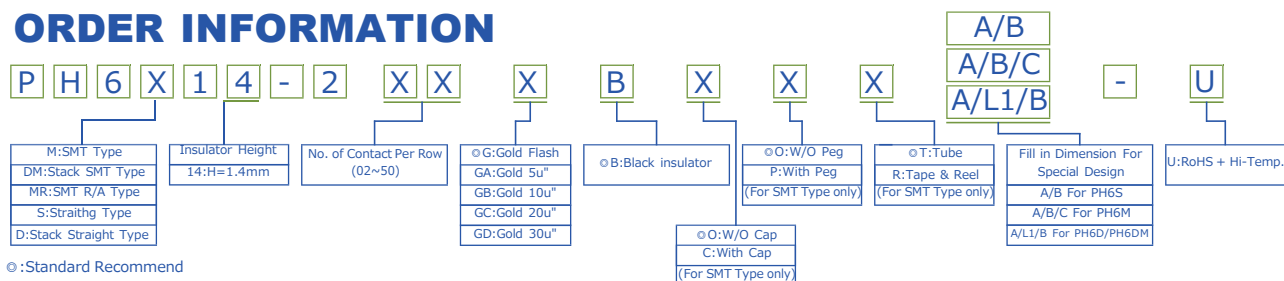

Pin Header 0.8mm 2 Row H=1.4mm SMT & Stack SMT Type

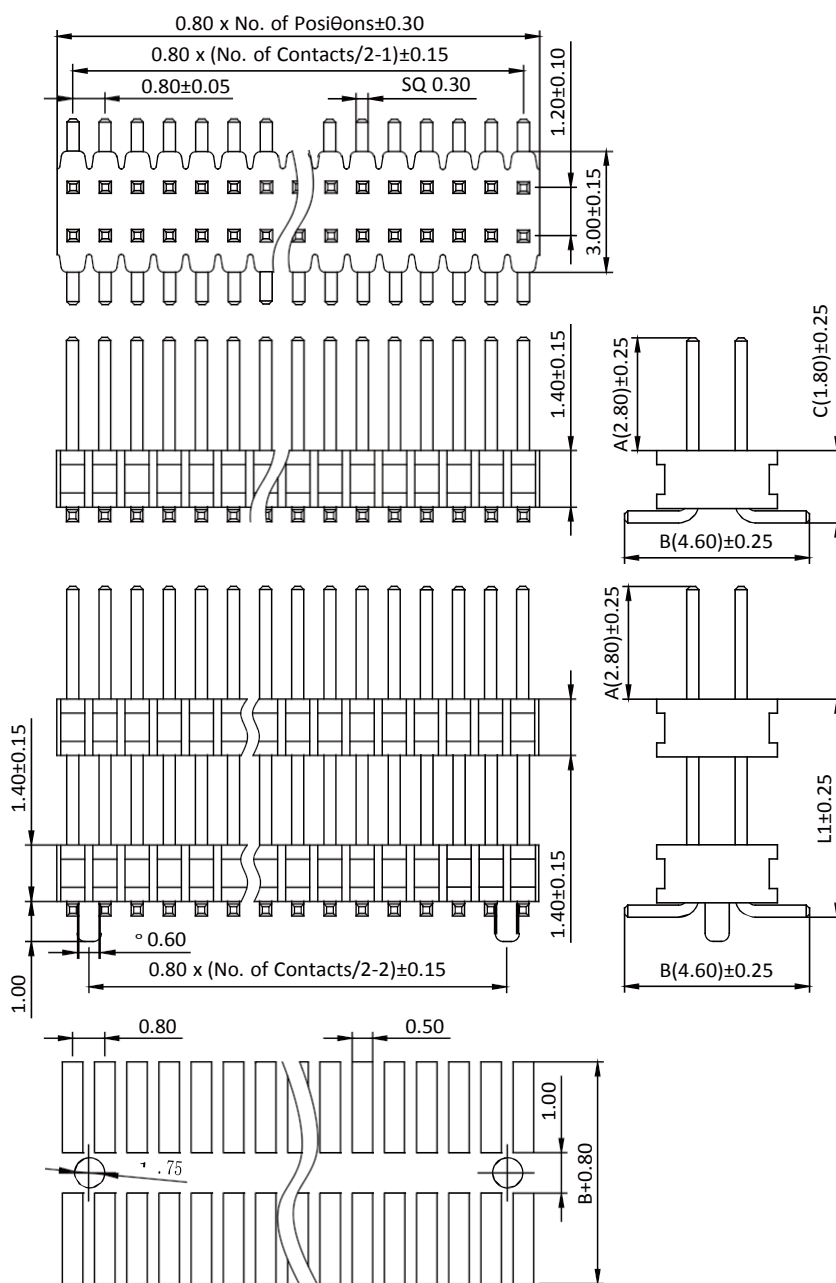





Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.:PH6M14-2XX-U
PH6DM14-2XX-U

Pin Header 0.8mm

Pin Header 0.8mm








Pin Header 0.8mm 2 Row H=1.4mm SMT R/A Type

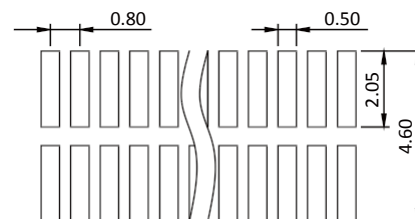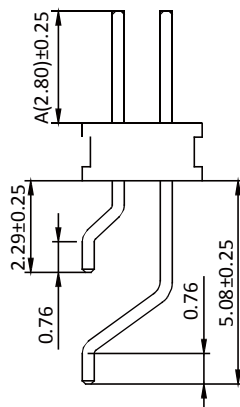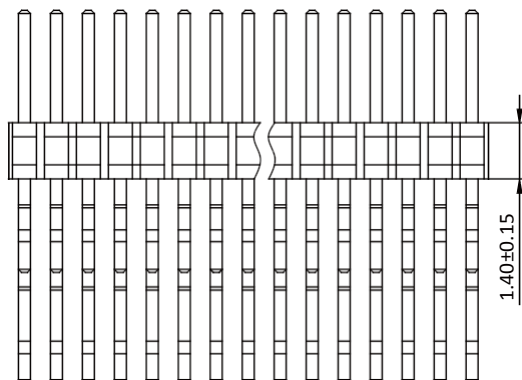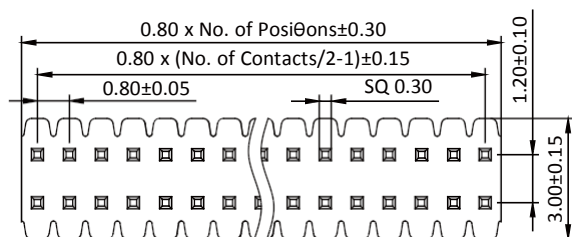

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.:PH6MR14-2XX-U

Female Header 0.8mm 2 Row H=1.4mm Straight & Stack Straight Type

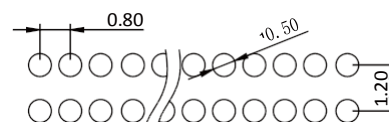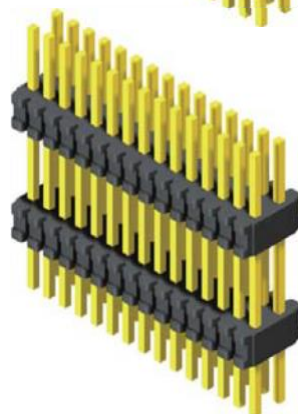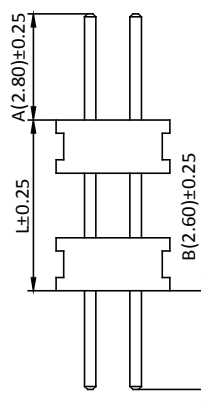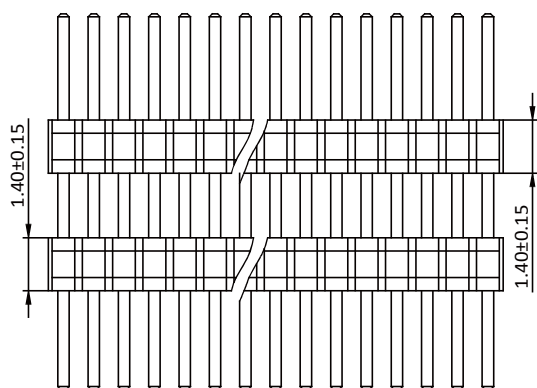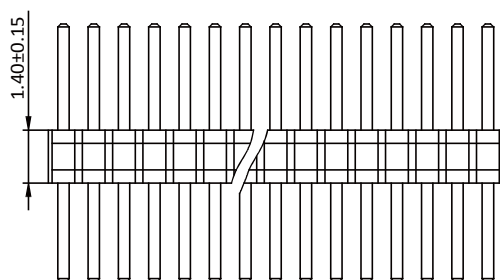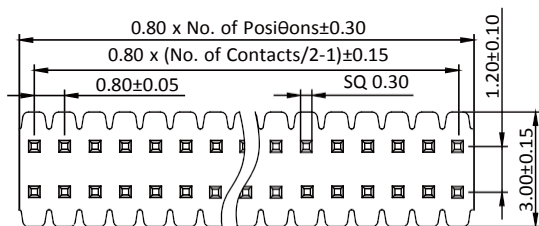

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.:PH6S14-2XX-U
PH6D14-2XX-U