

Female Header 2.54mm SMT / SMT R/A / Right Angle Type


Specifications

Current Rate:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

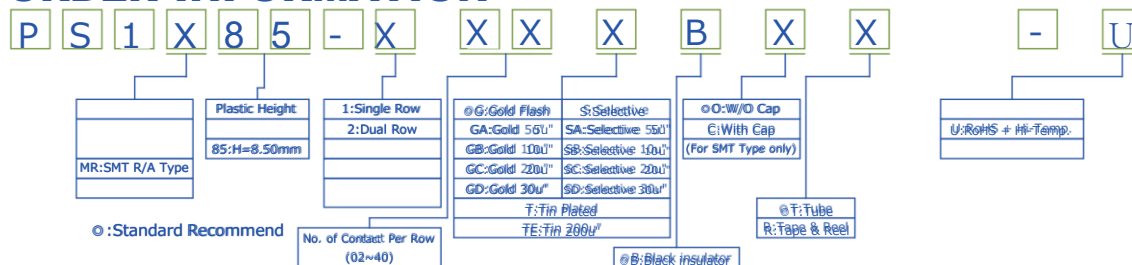

Female Header 2.54mm 1 & 2 & 3 Row H=8.5mm SMT Right Angle Type

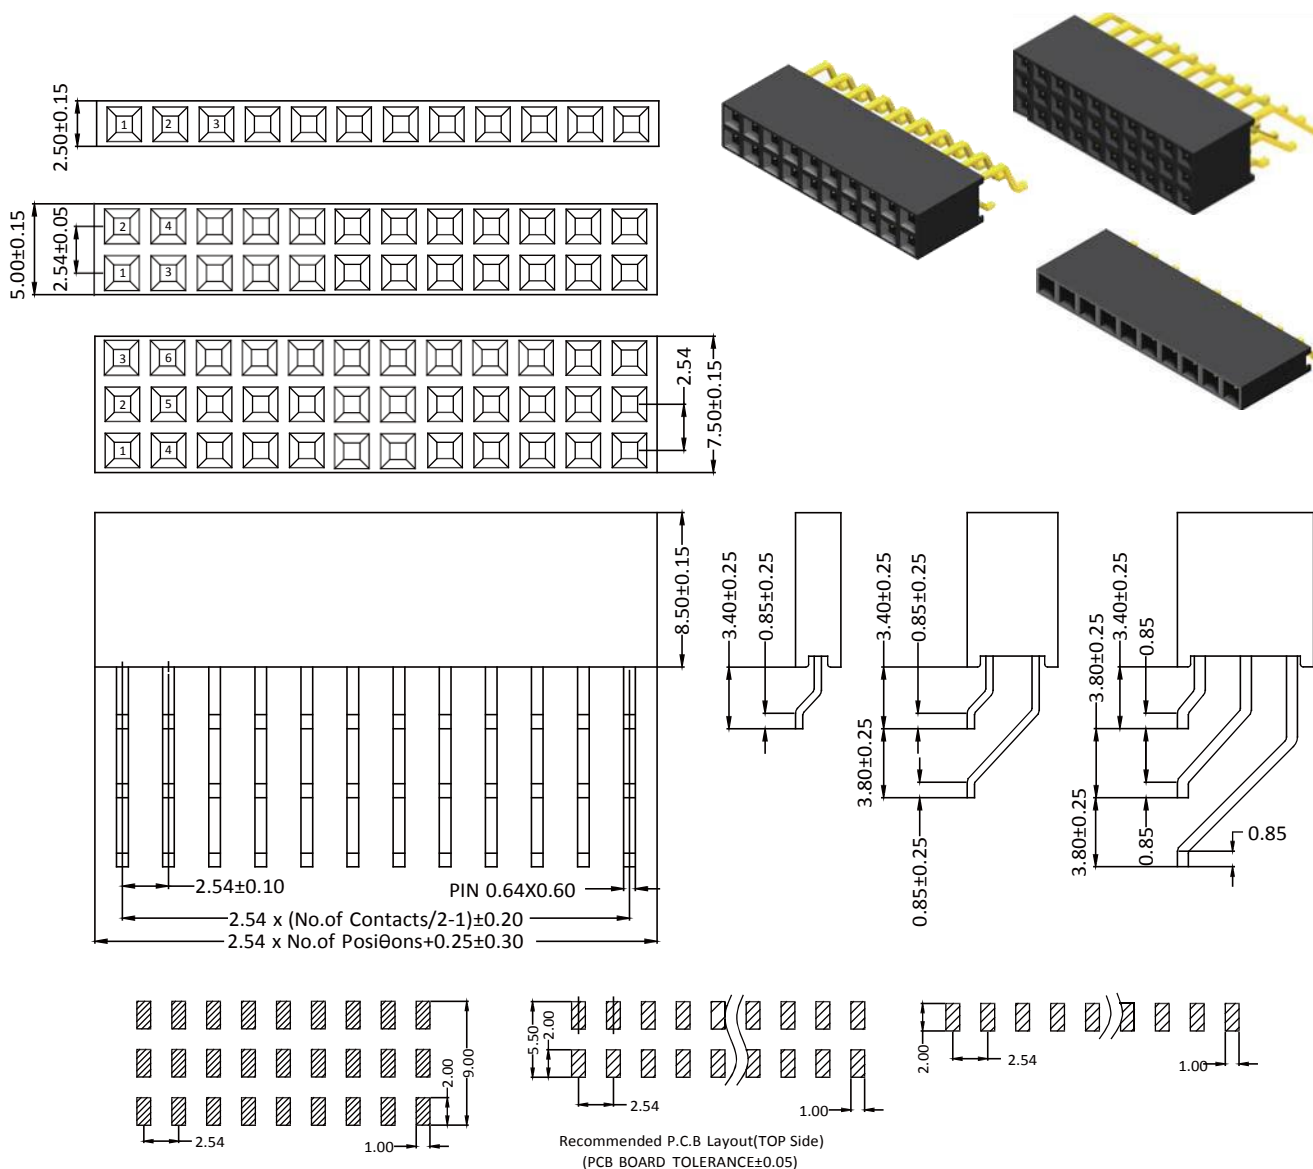

Part No.:PS1MR85-1/2/3XX-U

Female Header 2.54mm