

Female Header 2.54mm Right Angle / R/A With Bump / Straight Type


Specifications

Current Rate:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

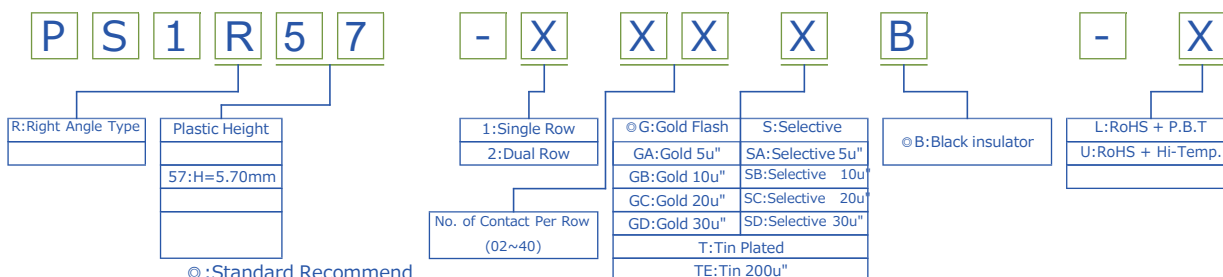

Female Header 2.54mm 1 & 2 Row H=5.7mm Right Angle Type

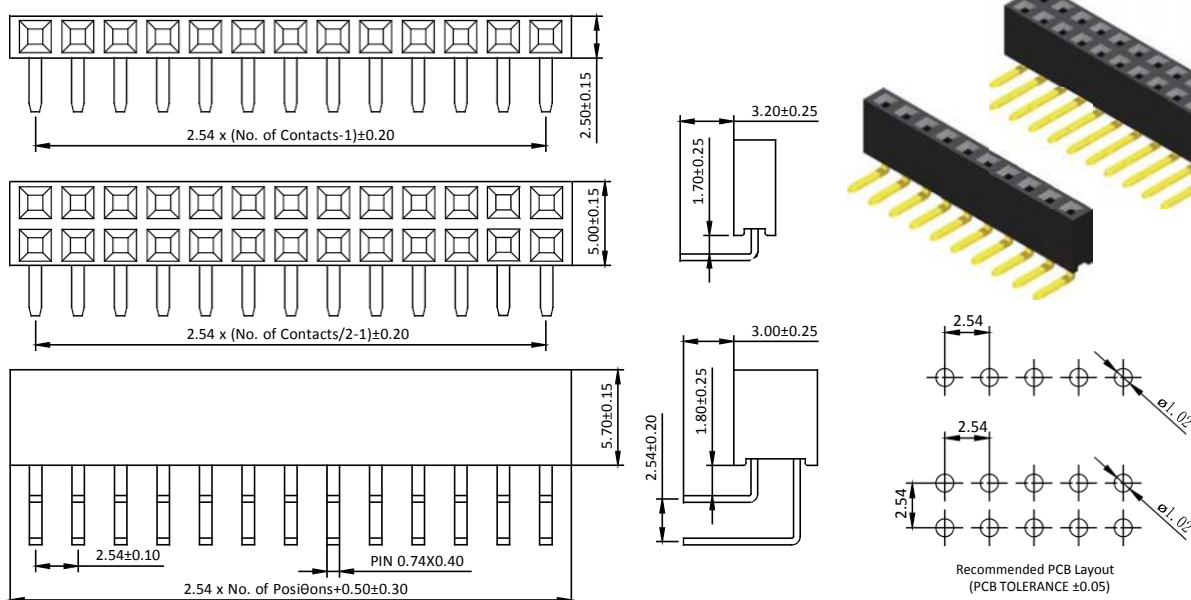

Part No.:PS1R57-1/2XX-L/U

Female Header 2.54mm