

Female Header 2.0mm 1 & 2 & 3 & 4 Row Elevated Straight Type


Specifications

Current Rate:2 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated


ORDER INFORMATION

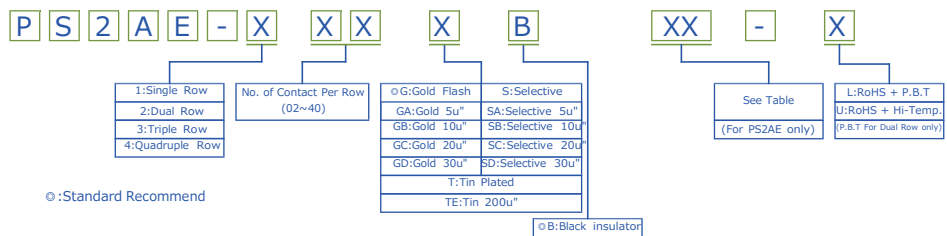

○:Standard Recommend

Female Header 2.0mm

Female Header 2.0mm 1 & 2 & 3 & 4 Row Elevated Straight Type

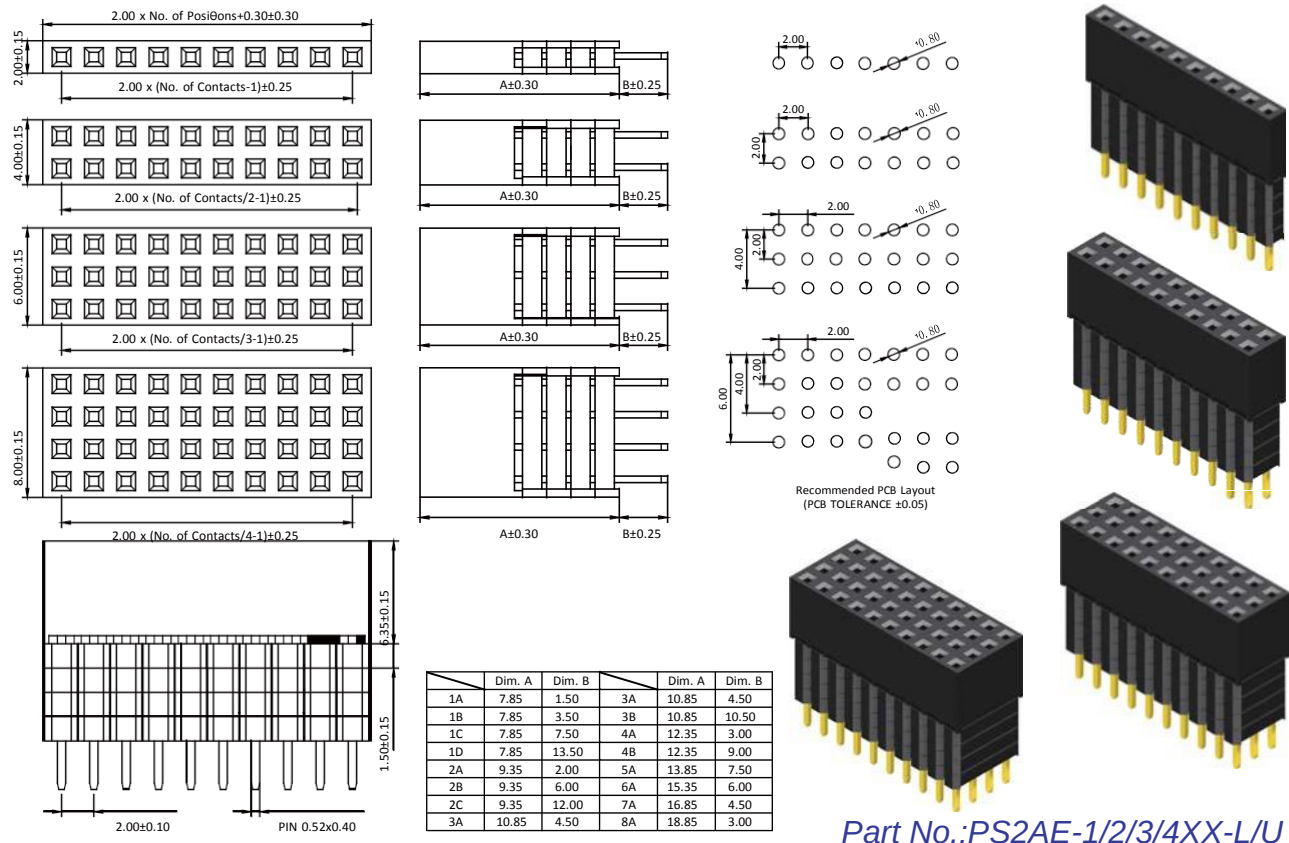

Part No.:PS2AE-1/2/3/4XX-L/U