

Female Header 2.0mm

Female Header 2.0mm Bottom Entry SMT / SMT Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C




Material

Insulator: Hi-Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

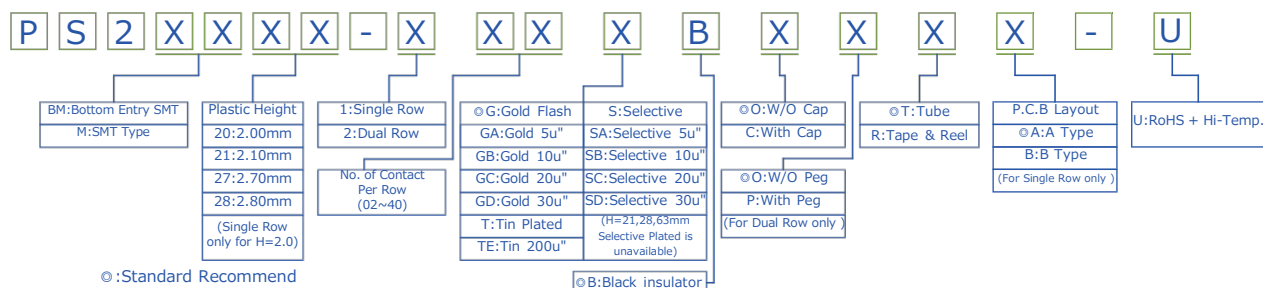


Female Header 2.0mm 1 & 2 Row H=2.0/2.7mm Bottom Entry SMT Type

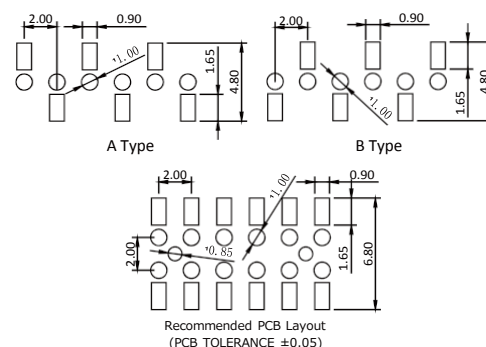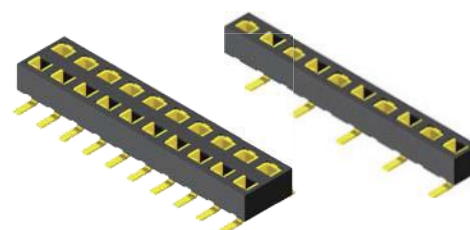
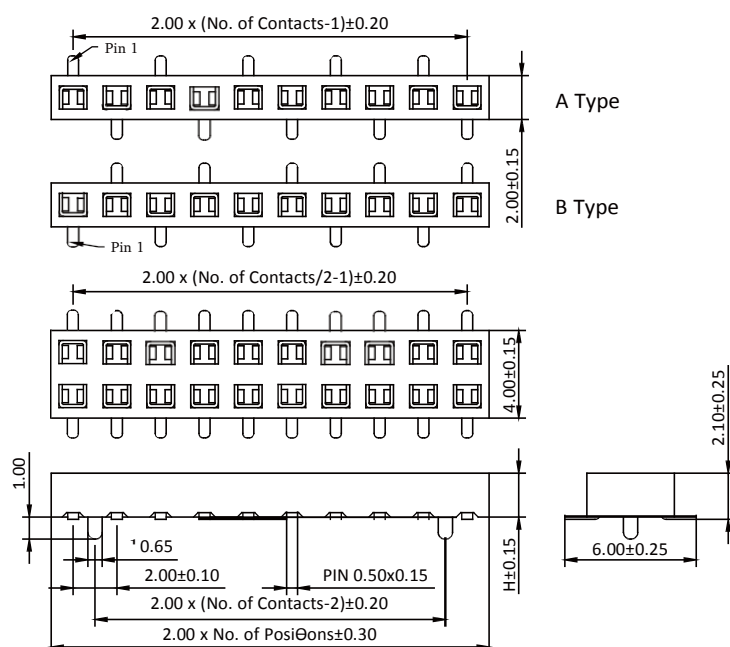


Part No.: PS2BM20/27-1/2XX-U

Female Header 2.0mm 2 Row H=2.1/2.8mm SMT Type

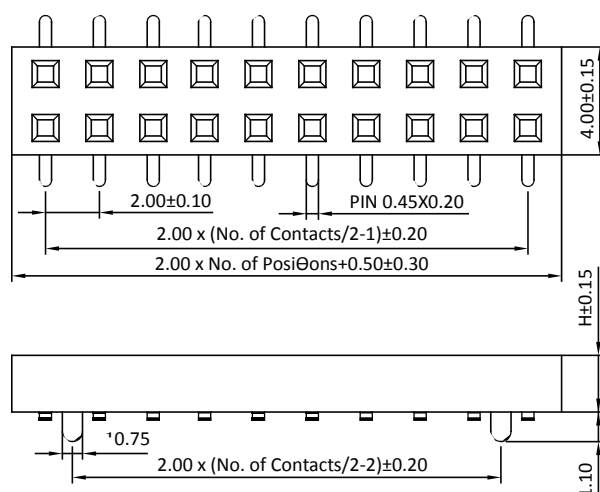

	Dim. W
H=2.1mm	5.35
H=2.8mm	5.80



Part No.: PS2M21/28-2XX-U