

Female Header 2.0mm 1 & 2 & 3 & 4 Row Elevated Straight Type


Specifications

Current Rate:2 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C



Material

Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

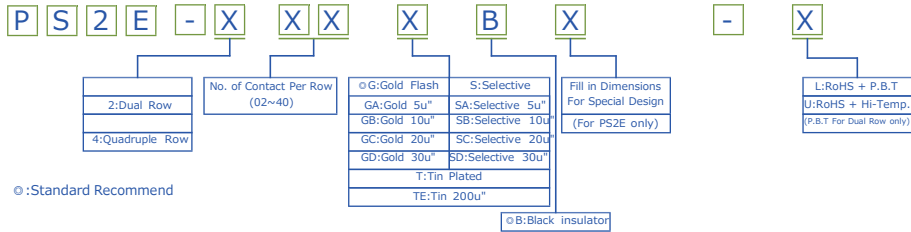

Female Header 2.0mm 2 & 4 Row Elevated Straight Type

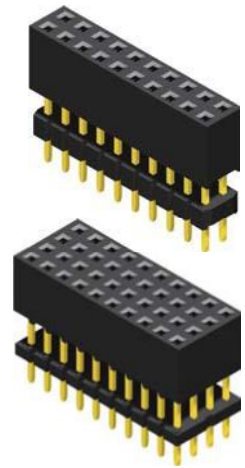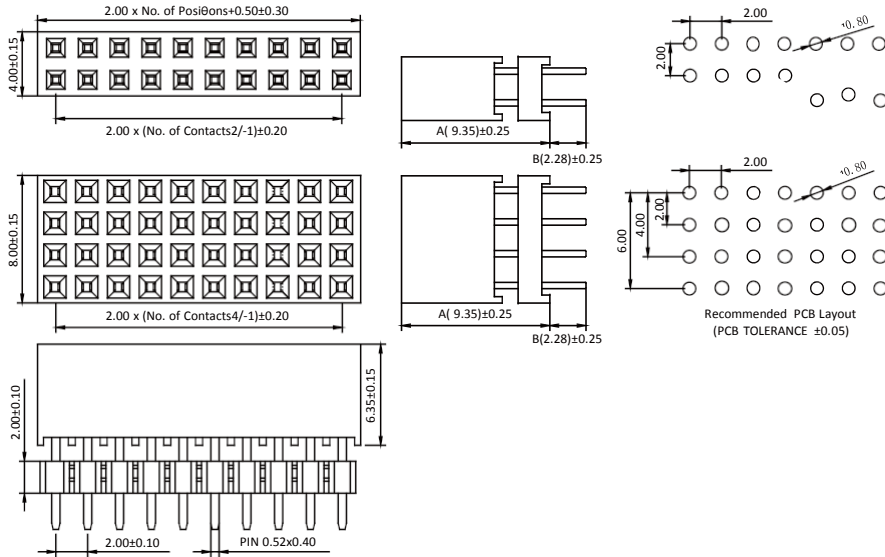

Part No.:PS2E-2/4XX-L/U

Female Header 2.0mm