

Female Header 2.0mm SMT / SMT R/A Type


Specifications

Current Rate:2 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C




Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

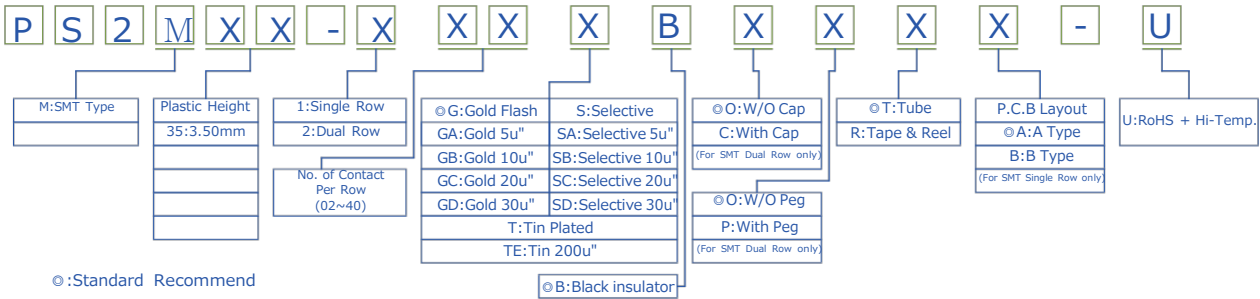

Female Header 2.0mm 1 & 2 Row H=3.56mm SMT Type

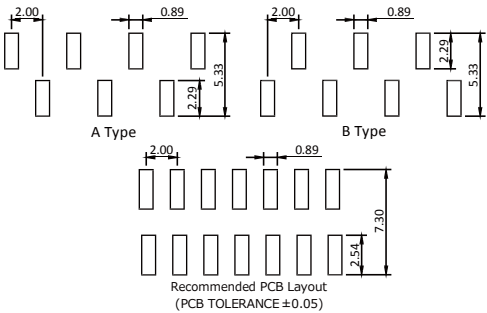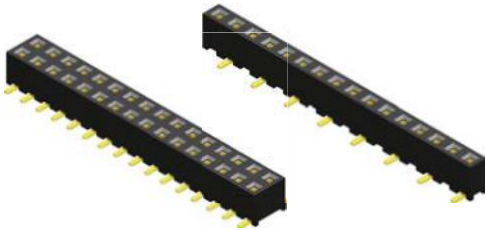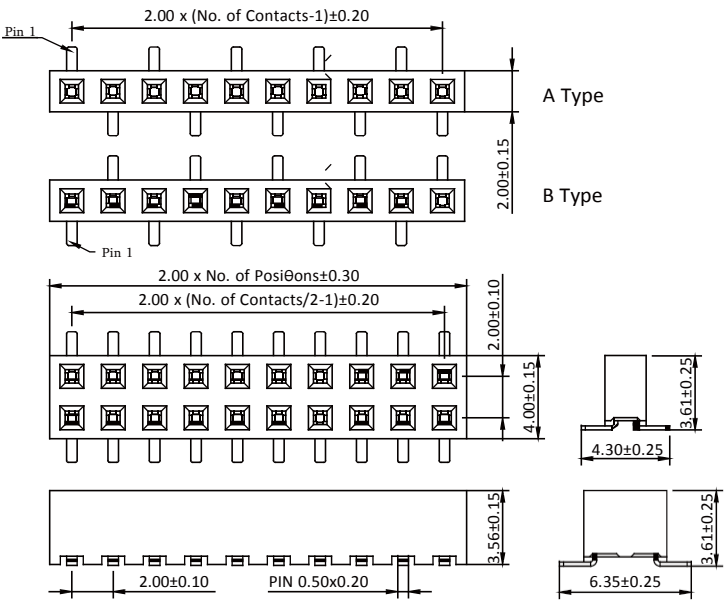

Part No.:PS2M35-1/2XX-U

Female Header 2.0mm