

Female Header 2.0mm SMT / SMT R/A Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

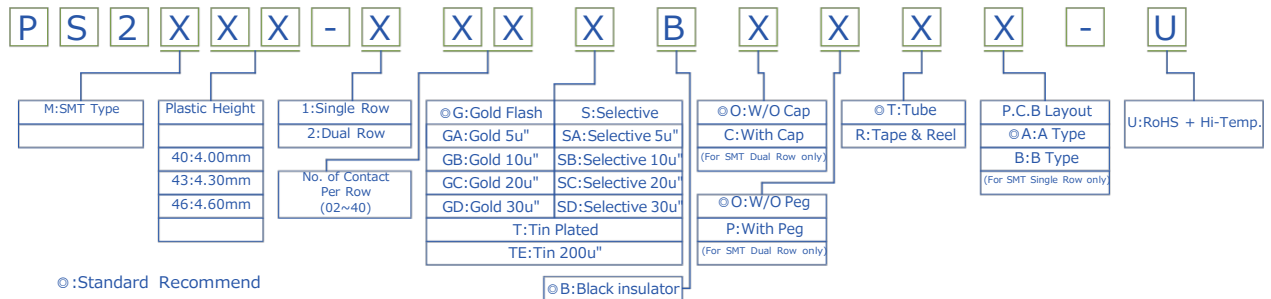

Female Header 2.0mm 1 & 2 Row H=4.0/4.3/4.6mm SMT Type

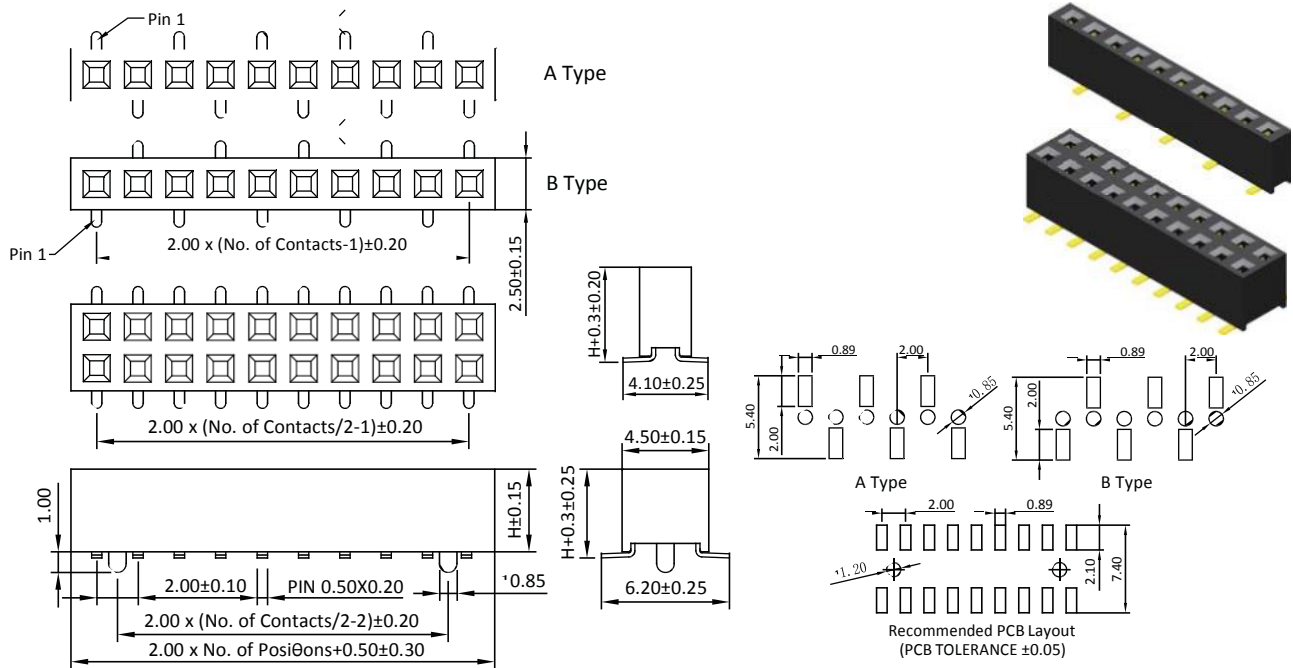

Part No.: PS2M40/43/46-1/2XX-U

Female Header 2.0mm